




Power Amplifier for Servo Valves

EHA-PAM-291-A-20

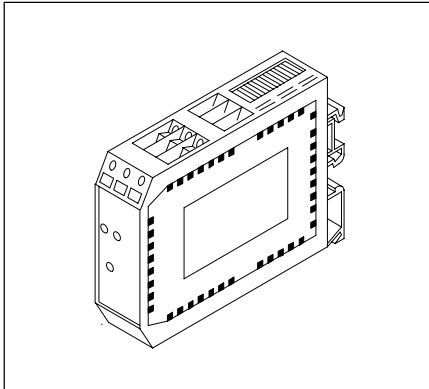

Front Panel; Actual Size

General Description


The EHA-PAM-291-A-20 power amplifier is designed for controlling Vickers by Danfoss SM4 servo-valves, or other servo-valves up to 200 mA max. current.

Gain, offset and dither (frequency and amplitude) are adjustable by potentiometers mounted in the front panel. An externally switched, 24V "drive enable" signal is used to switch the power drive on and off.

The amplifier is packaged as a "snap-on" control module for mounting into control cabinets using mounting rails to DIN EN 50022 or DIN EN 50035.

Features and Benefits

- LED shows when 24V power supply is present
- Two test terminals allow dither amplitude and gain setting (output current) to be measured, simplifying start-up and fault finding
- Output stage is short circuit protected
- "Drive enable/disable" controlled by external signal
- Uni-polar voltage input; bi-polar current output

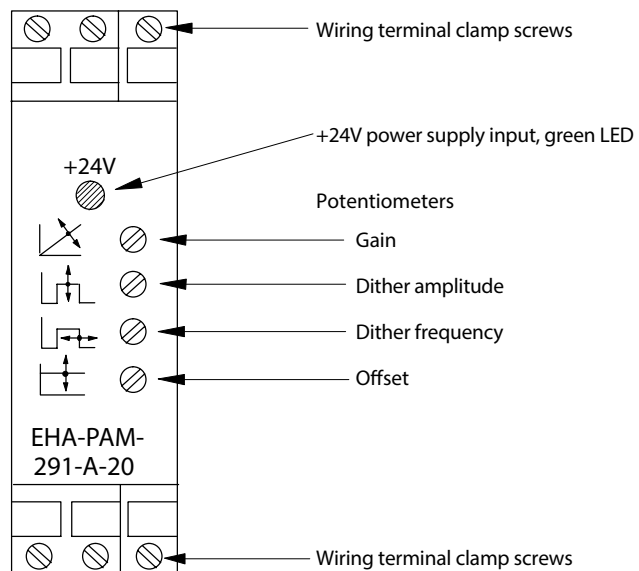

This product has been designed and tested to meet specific standards outlined in the European Electromagnetic Compatibility Directive (EMC) 89/336/EEC, amended by 91/263/EEC, 92/31/EEC and 93/68/EEC, article 5. For instructions on installation requirements to achieve effective protection levels, see this leaflet and the Installation Wiring Practices for Vickers by Danfoss Electronic Products leaflet 2468. Wiring practices relevant to this Directive are indicated by Electromagnetic Compatibility (EMC).

Operating Data

Power supply	24V DC nominal (18 to 36V DC), 7W max. Ripple pk-to-pk $\leq 4V_{pp}$
Differential input signal	0 to $\pm 10V$ ($R_i = 47\text{ k}\Omega$) (overload capacity up to max. $\pm 25V$)
Maximum output current	$\pm 200\text{ mA}$ ($\pm 300\text{ mA}$ at min. supply voltage)
Gain: Adjustment range Factory setting	1 to 40 mA/V 4 mA/V
Offset: Adjustment range Factory setting	+ 40 to - 40 mA output current 0 mA
Drive enable Drive disable	12 to 36V ($R_i = 4,7\text{ k}\Omega$) < 8V, or open circuit
Dither amplitude: Adjustment range Factory setting Dither frequency: Adjustment range Factory setting	0 to 20% 4% 150 to 500 Hz 400 Hz
Linearity	< 0,5%
Temperature coefficient	< 0,05% per $^{\circ}\text{C}$ (0.03% per $^{\circ}\text{F}$)
-3 dB frequency response	> 1,5 kHz
Test terminals (E and F measured against D): E: output current F: dither	1V = 500 mA 1V = 2,5% amplitude
Wiring recommendations, all connections	0,5 to 2,5 mm ² (22 to 12 AWG)
Housing material	Polyamid 6.6
Protection	IEC 529 class IP20
Vibration: Vickers by Danfoss environmental specification	Class I level 2 (IEC 68-2-6)
Electromagnetic compatibility (EMC): Emission Immunity	IEC 529 class IP20 EN 50081-2 EN 50082-2
Ambient temperature range: Operational Storage	0 $^{\circ}$ to +50 $^{\circ}\text{C}$ (+32 $^{\circ}$ to +122 $^{\circ}\text{F}$) -25 $^{\circ}$ to +85 $^{\circ}\text{C}$ (-13 $^{\circ}$ to +185 $^{\circ}\text{F}$)
Mass	0,11 kg (0.24 lb)

Adjustments

Gain

Output current/input voltage ratio is increased by turning the potentiometer clockwise; decreased by turning counter-clockwise

Dither Amplitude

The dither amplitude is measured as a percentage of the maximum value. Increase by turning the potentiometer clockwise; decrease by turning counter-clockwise..

Dither Frequency


Increase by turning the potentiometer clockwise; decrease by turning counter-clockwise.

Offset

Turn the potentiometer clockwise to obtain a negative offset of output current; counter-clockwise for a positive offset.

Operating Range

If the required output current is above 200 mA and the load resistance is below 50 Ohm, the power supply voltage must be reduced in accordance with characteristics shown.

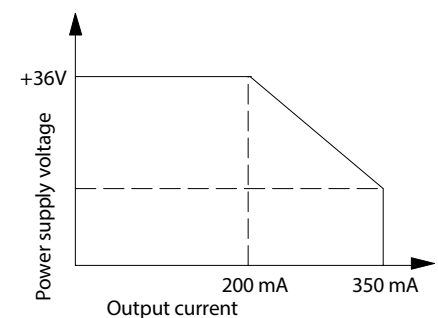


Warning: Electromagnetic Compatibility (EMC)

It is necessary to ensure that the unit is wired up in accordance with the connection arrangements shown in this leaflet. For effective protection, the user's electrical cabinet, the valve subplate or manifold and the cable screens should be connected to efficient ground points. The metal 7-pin connector part no. 934939 should be used for the integral amplifier.


In all cases, both valve and cable should be kept as far away as possible from any source of electromagnetic radiation such as cables carrying heavy current, relays and certain kinds of portable radio transmitters, etc. Difficult environments could mean that extra screening may be necessary to avoid the interference.

Electrical Block Diagram

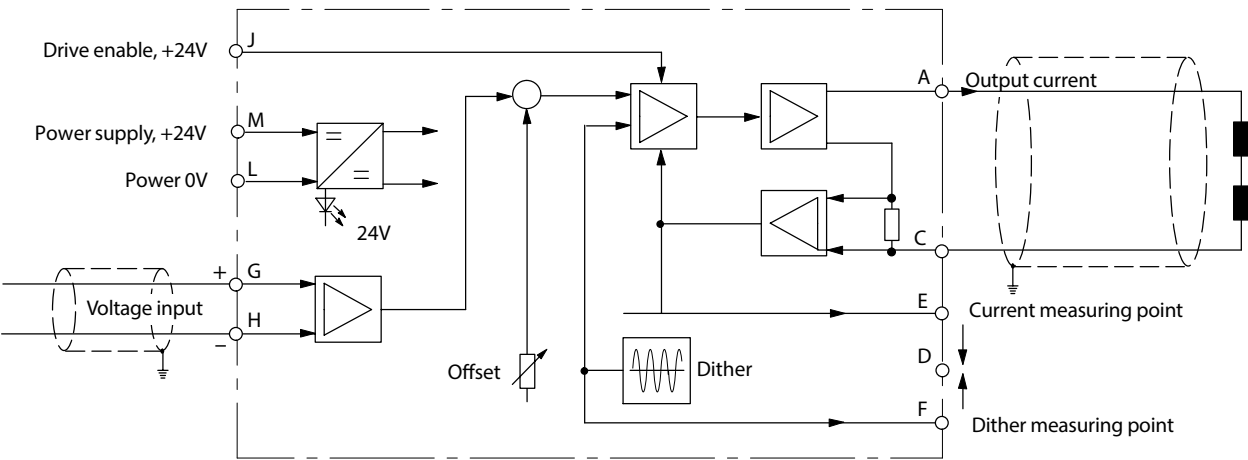

⏏ Customer's protective ground connection.

Installation Dimensions in mm (inches)

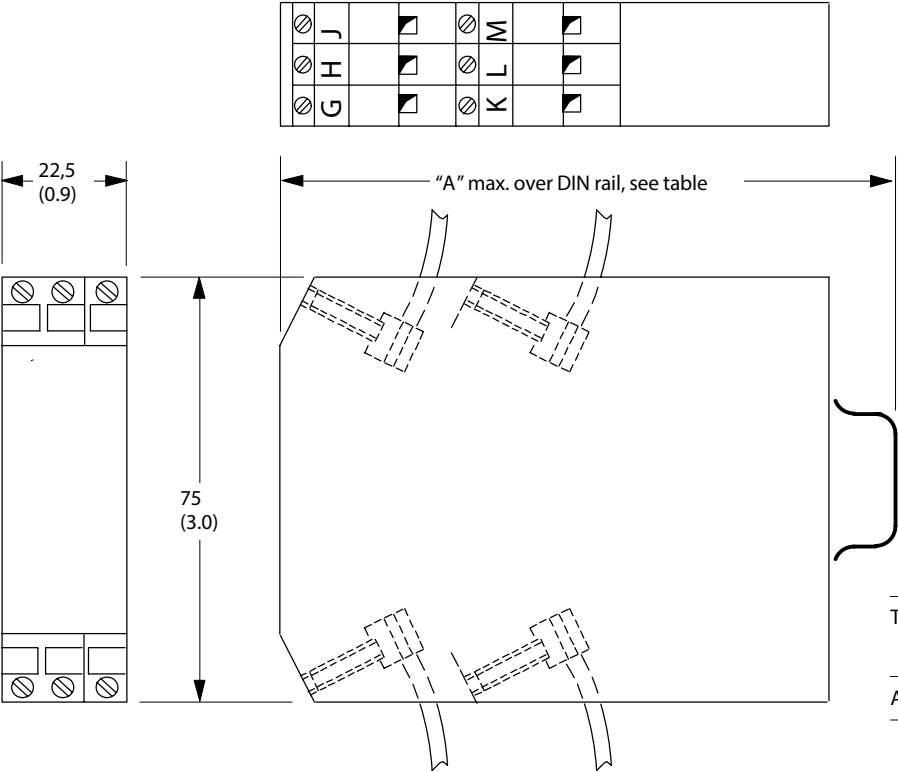

Type	TS1	TS3	TS4/5
A	107 (4.22)	102 (4.01)	109,5 (4.32)

⊗ F	⊗ E	⊗ D	⊗ A	⊗ B	⊗ C
-----	-----	-----	-----	-----	-----

Products we offer:

- Cartridge valves
- DCV directional control valves
- Electric converters
- Electric machines
- Electric motors
- Gear motors
- Gear pumps
- Hydraulic integrated circuits (HICs)
- Hydrostatic motors
- Hydrostatic pumps
- Orbital motors
- PLUS+1® controllers
- PLUS+1® displays
- PLUS+1® joysticks and pedals
- PLUS+1® operator interfaces
- PLUS+1® sensors
- PLUS+1® software
- PLUS+1® software services, support and training
- Position controls and sensors
- PVG proportional valves
- Steering components and systems
- Telematics

Hydro-Gear

www.hydro-gear.com

Daikin-Sauer-Danfoss

www.daikin-sauer-danfoss.com

Danfoss Power Solutions is a global manufacturer and supplier of high-quality hydraulic and electric components. We specialize in providing state-of-the-art technology and solutions that excel in the harsh operating conditions of the mobile off-highway market as well as the marine sector. Building on our extensive applications expertise, we work closely with you to ensure exceptional performance for a broad range of applications. We help you and other customers around the world speed up system development, reduce costs and bring vehicles and vessels to market faster.

Danfoss Power Solutions – your strongest partner in mobile hydraulics and mobile electrification.

Go to www.danfoss.com for further product information.

We offer you expert worldwide support for ensuring the best possible solutions for outstanding performance. And with an extensive network of Global Service Partners, we also provide you with comprehensive global service for all of our components.

Local address:

**Danfoss
Power Solutions (US) Company**
2800 East 13th Street
Ames, IA 50010, USA
Phone: +1 515 239 6000

**Danfoss
Power Solutions GmbH & Co. OHG**
Krokamp 35
D-24539 Neumünster, Germany
Phone: +49 4321 871 0

**Danfoss
Power Solutions ApS**
Nordborgvej 81
DK-6430 Nordborg, Denmark
Phone: +45 7488 2222

**Danfoss
Power Solutions Trading
(Shanghai) Co., Ltd.**
Building #22, No. 1000 Jin Hai Rd
Jin Qiao, Pudong New District
Shanghai, China 201206
Phone: +86 21 2080 6201

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.