CHIEF™ WP WELDED CYLINDERS - 3000 PSI


MEDIUM DUTY, HIGHLY VERSATILE WELDED CYLINDER WITH CROSS-TUBE BASE


This Bailey Chief cylinder is ideal for construction, agriculture, trailer manufacturers, metal fabricating, and waste/recycling equipment applications.

Features:

- **Intended Use:** Double-acting application
- **Piston:** Ductile iron with wear ring
- **Gland:** Ductile iron, screw-in design with wear ring
- **Tube:** Precision honed steel
- **Rod:** Hard chrome plated
- **Rod End Mount:** Rod eye drilled
- **Base End Mount:** Steel cross-tube with grease zerk
- **Tube Seal:** Buna o-ring with Polytemp hytrel backup
- **Rod Seal:** Deep polypak with B lip design
- **Rod Wiper:** Urethane, snap-in
- **Piston Seal:** Hallite 755 provides prolonged wear resistance with wear ring
- **Painted black**
- **3 year limited warranty**



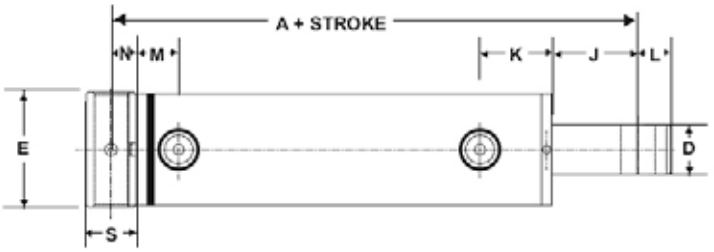

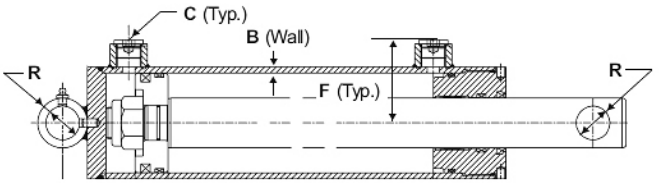

Dimensional Data in Inches:

BORE	A	B	C	D	E	F	J	K	L	M	N	R	S
1.5	7	0.1875	SAE 6	1.000	2.000	1.625	2.507	2.125	0.625	0.851	0.625	0.640	1.25
2.0	8	0.1875	SAE 8	1.250	2.500	1.874	3.444	1.875	0.752	0.974	0.625	0.765	1.25
2.5	8	0.1875	SAE 8	1.375	3.000	2.125	3.125	2.000	0.752	1.044	0.625	0.765	1.25
3.0	8	0.1875	SAE 8	1.500	3.500	2.375	2.629	2.187	1.000	1.245	0.750	1.015	1.50
3.5	8	0.1875	SAE 8	1.750	4.000	2.624	2.438	2.312	1.000	1.312	0.750	1.015	1.50
4.0	9	0.2500	SAE 8	2.000	4.625	2.937	3.002	2.185	1.250	1.613	1.000	1.265	2.00