

Vane Type Double Pump

4535VQ Series - 20 Design
AX438765616836en-000101

ENGINEERING
TOMORROW




▲ INCLUDED IN DOUBLE
SHAFT SEAL KIT 920072.

F3 EQUIVALENT SEAL
KIT 920074.

▲ INCLUDED IN DOUBLE
SHAFT SEAL KIT 920073.

F3 EQUIVALENT SEAL
KIT 920075.

□ WIPE O.D. OF SEAL WITH OIL
BEFORE PRESSING INTO BODY.
APPLY GREASE TO SEAL I.D.
BEFORE INSTALLATION OF SHAFT.

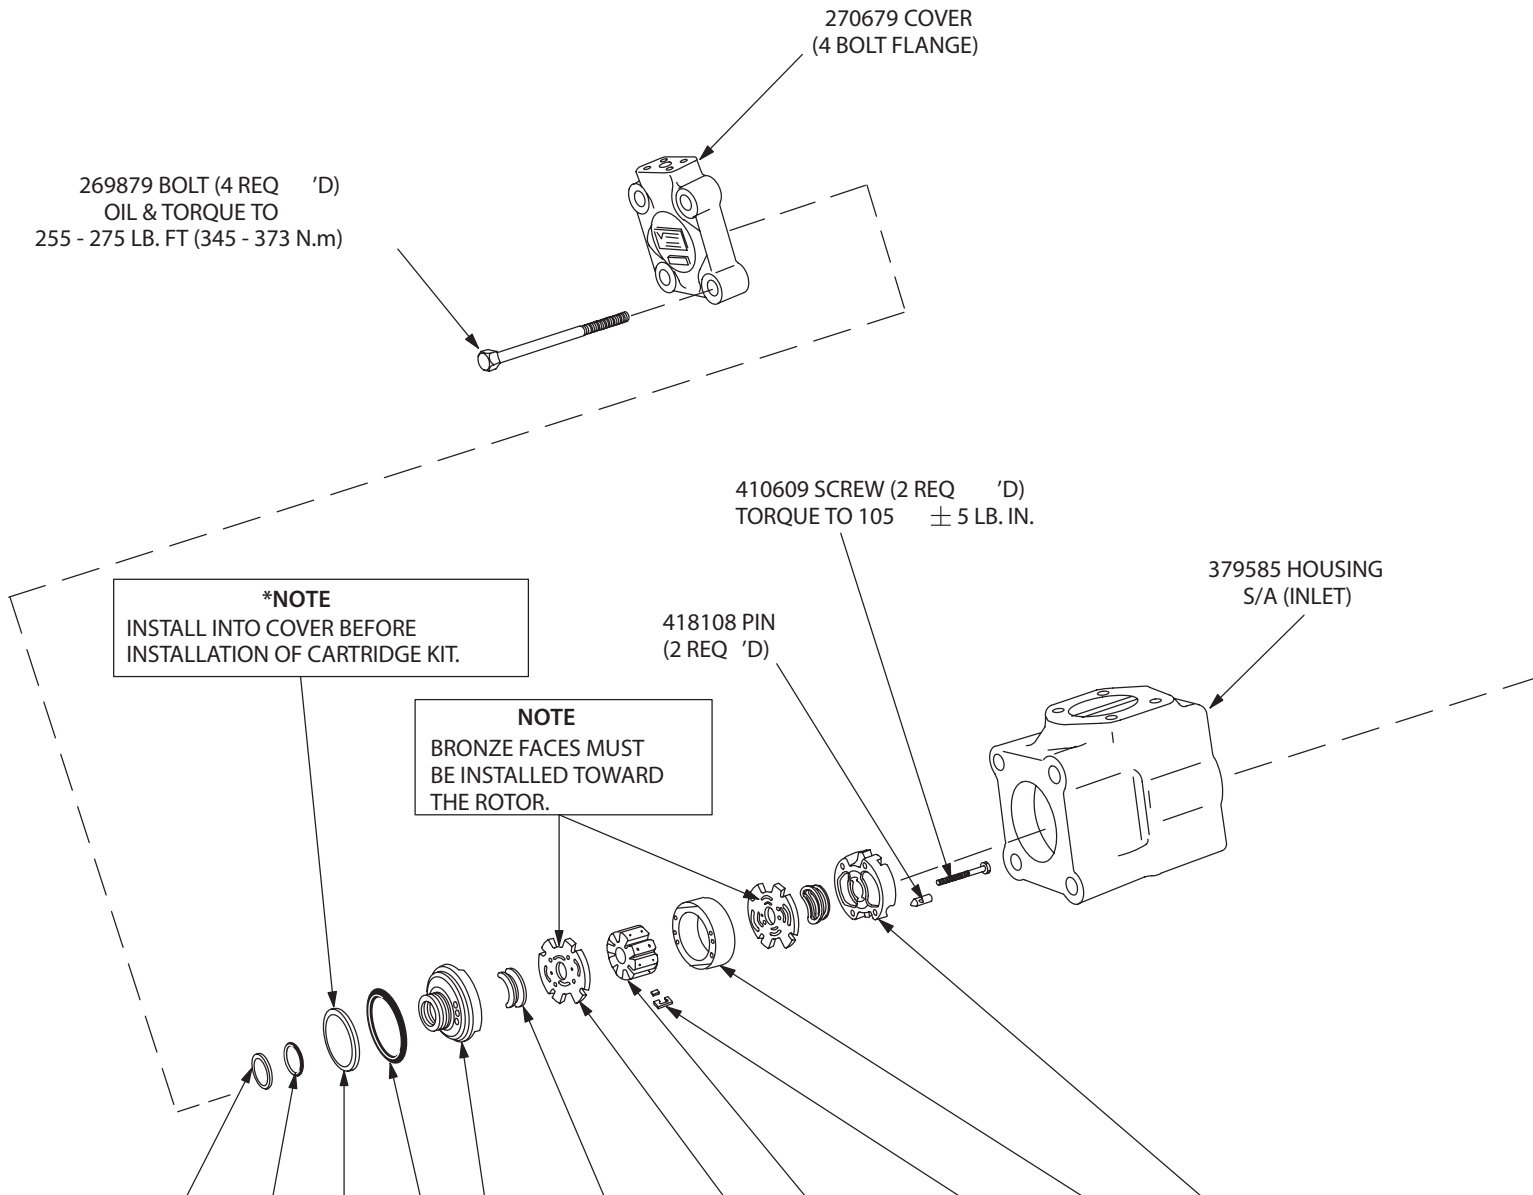

MODEL	▲ BACK-UP RING	▲ "O" RING	▲ SEAL RING	▲ "O" RING	OUTLET SUPPORT PLATE	▲ SEAL PACK (4 REQ 'D)	■ FLEX-SIDE PLATE KIT	ROTOR	VANE KIT (10 VANES & 10 INSERTS)	RING	INLET SUPPORT PLATE	CART. KIT	F3 CART. KIT
THESE PARTS ARE INCLUDED IN CARTRIDGE KIT													
4535***21**	588506	154084	419674	154101	412003	433766 S/A	923953	262154	922700	394961	412005	421239	421563
4535***25**										319396		421240	421564
4535***30**										319397		421241	421565
4535***35*										319398		421242	421566
4535***38*										319399		421243	4215672

● ASSEMBLE SEAL FLUSH TO PILOT FACE WITH SPRING FACING INWARD AS SHOWN.

○ ASSEMBLE SEAL WITH SPRING TOWARD BEARING.

MOUNTING ASSEMBLY
4535VQ**A**F-***-20(*)

INCLUDED IN FOOT BRACKET KIT NO.	SCREW (2 REQ 'D)	MOUNTING BRACKET
FB-C-10	205533	205077

SHAFT NO.	TYPE	SHAFT P/N	SEC. SHAFT SEAL	KEY
1	STR. KEYED	289083	—	217596
11	SPLINE	289084	—	—
86	STR. KEYED HEAVY DUTY	361763	—	239751
114	SPLINE	413027	429282	—

△●□ SECONDARY SHAFT SEAL (SEE TABLE) (USE ON 'S' FLANGE MOUNTED MODELS ONLY.)

▲□○ 394974 PRIMARY SHAFT SEAL

194878 WASHER

SCREW (SEE TABLE)

942356 BODY S/A

131812 BEARING

102949 RETAINING RING
158630 SPIROLOX RING


NOTE
BRONZE FACES MUST BE INSTALLED TOWARD THE ROTOR.

TORQUE TO
105 LB. IN. (12 N.m)
± 5 LB. IN. (0.5 N.m)

MODEL	SCREW (2 REQ 'D)	PIN (2 REQ 'D)	INLET SUPPORT PLATE	▲ SEAL PACK (4 REQ 'D)	◆ FLEX-SIDE - PLATE KIT	ROTOR	VANE KIT (10 VANES & 10 INSERTS)	RING	OUTLET SUPPORT PLATE	■▲ "O" RING	*■▲ SEAL RING	▲ "O" RING	■▲ BACK-UP RING	CART. KIT	F3 CART. KIT
THESE PARTS ARE INCLUDED IN CARTRIDGE KIT															
4535VQ42A	380109	422208	430807 S/A	433768 S/A	923954	283871	922701	295710	425510	154107	419675	154087	588509	416435	419511
4535VQ47A								297718						421234	421954
4535VQ50A								297502						416436	419510
4535VQ57A								306772						421233	421955
4535VQ60A								297503						416437	419509


*INSTALL SEAL RING IN BODY OR COVER, THEN INSTALL CARTRIDGE KIT.

■ **NOTE** : FLEX SIDEPLATE KITS INCLUDE (4) F3 SEAL PACKS.

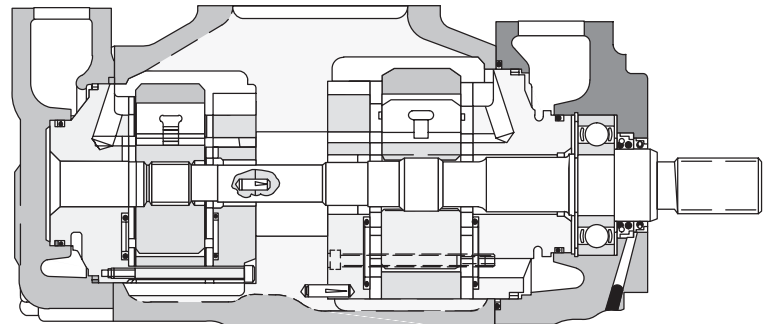

Model Code

(F3) - 4535 VQ ** A ** - * 1 ** 20 (*) - 28 *



1 Viton seals
(Omit if not required.)

2 Series designation

3 Intra-vane pump

4 USgpm capacity
(Shaft end pump)

SAE rating 1200 rpm -100 psi (7 bar)

42 - 42 USgpm 57 - 57 USgpm
47 - 47 USgpm 60 - 60 USgpm
50 - 50 USgpm

5 SAE port connections

Models Without Flow Control

Code	Inlet	Outlet #1	Outlet #2
A -	4 bolt flange	4 bolt flange	4 bolt flange

6 USgpm capacity
(Cover end pump)

SAE rating 1200 rpm -100 psi (7 bar)

21 - 21 USgpm 35 - 35 USgpm
25 - 25 USgpm 38 - 38 USgpm
30 - 30 USgpm

7 Mounting

F - Foot (Single shaft seal)
S - Flange (Double shaft seal)
Omitted for flange, single shaft seal assembly.

8 Shaft type

1- Straight with square key standard
11- Splined
86- Straight with square key heavy duty
114 - Splined

9 Outlet port positions
(Viewed from cover end of pump)

With # 1 outlet opposite inlet:
AA - # 2 outlet - Opposite inlet
AB - # 2 outlet - 90 ° CCW from inlet
AC - # 2 outlet - Inline with inlet
AD - # 2 outlet - 90 ° CW from inlet

With # 1 outlet 90 ° CCW from inlet:
BA - # 2 outlet - Opposite inlet
BB - # 2 outlet - 90 ° CCW from inlet
BC - # 2 outlet - Inline with inlet
BD - # 2 outlet - 90 ° CW from inlet

With # 1 outlet inline with inlet:
CA - # 2 outlet - Opposite inlet
CB - # 2 outlet - 90 ° CCW from inlet
CC - # 2 outlet - Inline with inlet
CD - # 2 outlet - 90 ° CW from inlet

With # 1 outlet 90 ° CW from inlet:
DA - # 2 outlet - Opposite inlet
DB - # 2 outlet - 90 ° CCW from inlet
DC - # 2 outlet - Inline with inlet
DD - # 2 outlet - 90 ° CW from inlet

10 Design


11 Rotation
(Viewed from shaft end of pump)

L - Left hand (CCW rotation)
Omitted for right hand rotation

12 Mounting


282 - SAE 2 -bolt mounting
283 - Foot mounting

Cover end cartridge R. H. Rotation



Sharp Edges of Vane Must Lead in Direction of Rotation

Shaft end cartridge R. H. Rotation



Sharp Edges of Vane Must Lead in Direction of Rotation

NOTE

Standard right hand shaft rotation cartridges shown. Reverse for left hand rotation; refer to note.

NOTE

To reverse cartridge kit rotation, remove the two screws and reverse the location of the inlet support plate and the outlet support plate. Reinstall the two screws hand tight. Use pump cover to align all sections of the cartridge. Carefully remove the cover and tighten the screws.

For satisfactory service life of these components, use full flow filtration to provide fluid which meets ISO cleanliness code 16/13 or cleaner. Selections from pressure, return, and in-line filter series are recommended.

Products we offer:

- Cartridge valves
- DCV directional control valves
- Electric converters
- Electric machines
- Electric motors
- Gear motors
- Gear pumps
- Hydraulic integrated circuits (HICs)
- Hydrostatic motors
- Hydrostatic pumps
- Orbital motors
- PLUS+1® controllers
- PLUS+1® displays
- PLUS+1® joysticks and pedals
- PLUS+1® operator interfaces
- PLUS+1® sensors
- PLUS+1® software
- PLUS+1® software services, support and training
- Position controls and sensors
- PVG proportional valves
- Steering components and systems
- Telematics

Danfoss Power Solutions is a global manufacturer and supplier of high-quality hydraulic and electric components. We specialize in providing state-of-the-art technology and solutions that excel in the harsh operating conditions of the mobile off-highway market as well as the marine sector. Building on our extensive applications expertise, we work closely with you to ensure exceptional performance for a broad range of applications. We help you and other customers around the world speed up system development, reduce costs and bring vehicles and vessels to market faster.

Danfoss Power Solutions – your strongest partner in mobile hydraulics and mobile electrification.

Go to www.danfoss.com for further product information.

We offer you expert worldwide support for ensuring the best possible solutions for outstanding performance. And with an extensive network of Global Service Partners, we also provide you with comprehensive global service for all of our components.

Local address:

Hydro-Gear

www.hydro-gear.com

Daikin-Sauer-Danfoss

www.daikin-sauer-danfoss.com

**Danfoss
Power Solutions (US) Company**
2800 East 13th Street
Ames, IA 50010, USA
Phone: +1 515 239 6000

**Danfoss
Power Solutions GmbH & Co. OHG**
Krokamp 35
D-24539 Neumünster, Germany
Phone: +49 4321 871 0

**Danfoss
Power Solutions ApS**
Nordborgvej 81
DK-6430 Nordborg, Denmark
Phone: +45 7488 2222

**Danfoss
Power Solutions Trading
(Shanghai) Co., Ltd.**
Building #22, No. 1000 Jin Hai Rd
Jin Qiao, Pudong New District
Shanghai, China 201206
Phone: +86 21 2080 6201