



Single Vane Type Pump


20V-A(F)-**-22-***

AX438767970868en-000101

Vane Type Single Pumps

20V—**A(F)—**—22—*

Model	● Outlet Plate S/A	● Rotor	● Vane Kit	● Inlet Plate	● Ring	● Cart Kit	● F3 Cart Kit
20V5	451453	402690	02-136720	584383	333624	02-102518	02-102523
20V8					333625	02-102519	02-102524
20V11		403539	02-136721	584384	333626	02-102520	02-102525
20V12					353901	02-102521	02-102526
20V14					353902	02-102522	02-102527

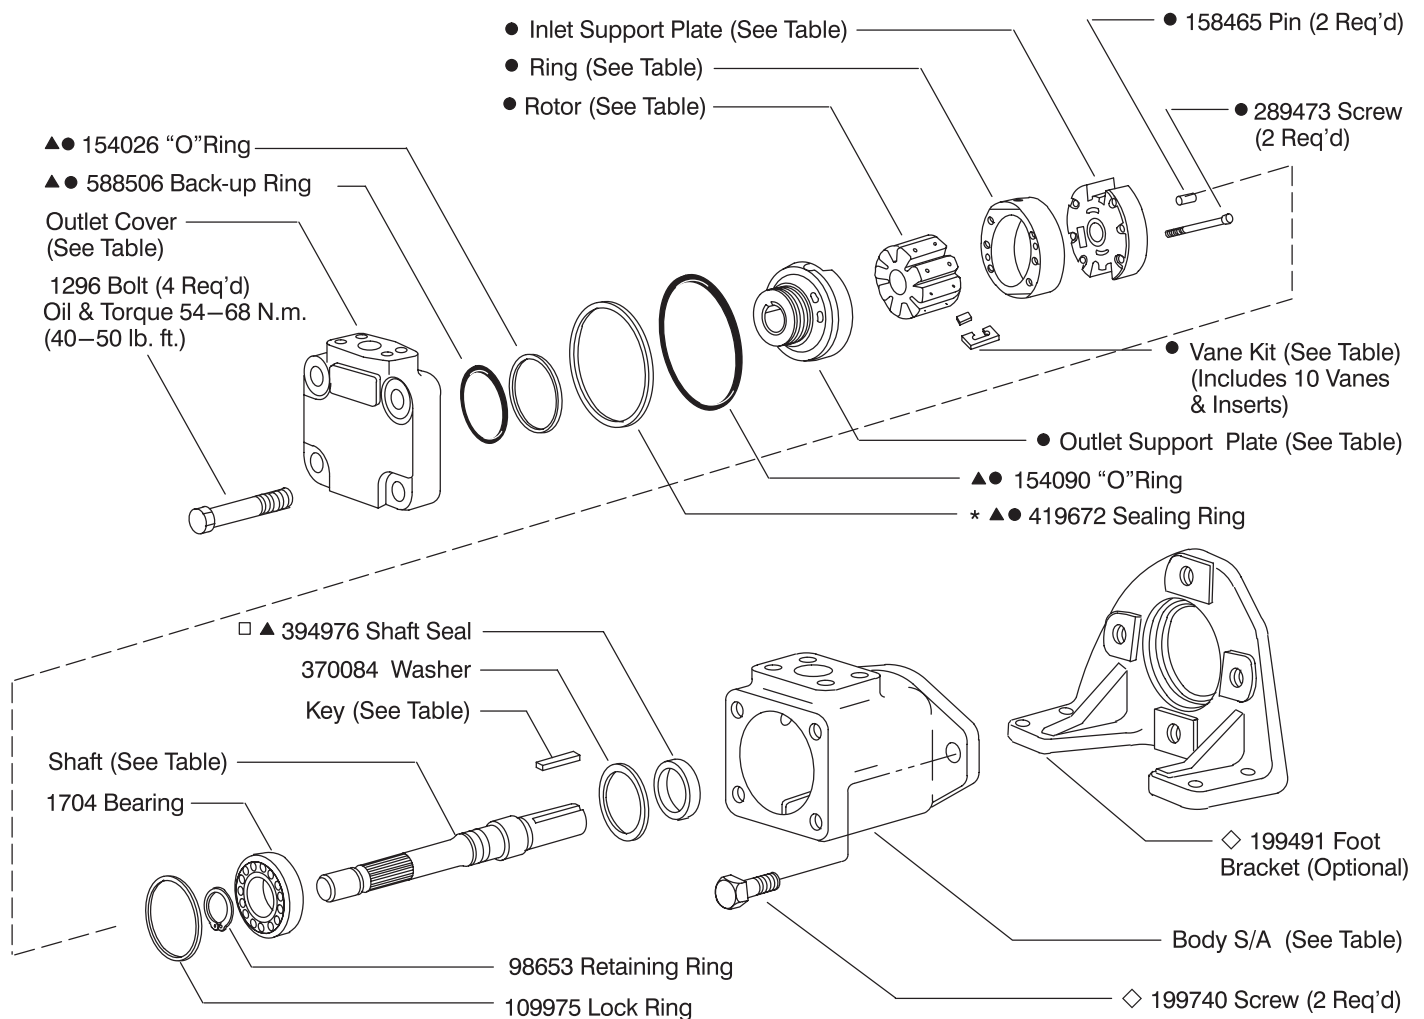

□ Assemble seal with spring loaded sealing member towards bearing. Seals to be completely wetted with oil prior to assembly.

* Install 419672 sealing ring into body, Then install cartridge kit.

Shaft	Type	Key
497109	(1) keyed	9955
497113	(151) splined	

Model	Outlet Cover	Body S/A
20V**A	250824	02-102335
20V**C	252504	02-102335

● Included in cartridge kit

▲ Included in seal kit 497125

F3 equivalent seal kit 981322

◇ Included in foot bracket kit FB—B—10

Model Code

(F3) - 20V - ** A (F) - ** - 22 - *

1

2

3

4

5

6

7

8

9

1 Special seals

2 Series designation

20V – 18 to 36 cm³/r
(1.1 to 2.2 in³/r)

3 Geometric displacement

(Rated capacity (USgpm) at
1200 rpm, 6.9 bar (100 psi))

Code	cm ³ /r	in ³ /r
5	18	1.10
8	27	1.67
11	36	2.22
12	40	2.47
14	45	2.78

4 Port connections

Code	Inlet	Outlet
A	4 bolt flg.	4 bolt flg.
C	4 bolt flg.	Str. thd.

5 Mounting

F – Foot mounting
Omit – Flange mounting

6 Shaft

1 – Straight keyed
151 – “B” Spline

7 Outlet positions

(Viewed from cover end of pump)

A – Opposite inlet port
B – 90° CCW from inlet
C – Inline with inlet
D – 90° CW from inlet

8 Design

9 Rotation

(Viewed from shaft end of pump)

L – Left hand for counterclockwise
R – Right hand for clockwise

NOTE


To reverse cartridge kit rotation, remove the two screws and reverse the location of the inlet support plate and outlet support plate. Re—install the two screws hand tight. Use pump cover to align all sections of the cartridge. Carefully remove the cover and tighten the screws.

NOTE

When ordering spare cartridge parts, it is recommended they be obtained in cartridge kits. Kits are assembled and tested by Vickers® by Danfoss for either right or left hand rotation. If left hand rotation is required, it should be specified on parts order by adding suffix “L” to cartridge kit number.

NOTE

For satisfactory service life of these components in industrial applications, use full flow filtration to provide fluid which meets ISO cleanliness code 16/13 or cleaner. OFP, OFR, and OFRS series filters are recommended.

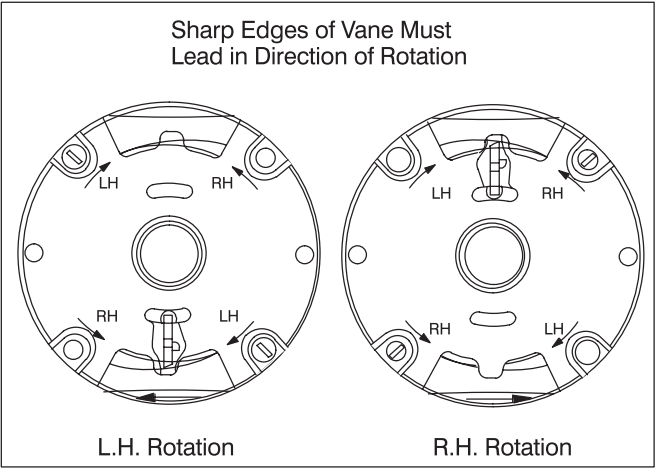

Products we offer:

- Cartridge valves
- DCV directional control valves
- Electric converters
- Electric machines
- Electric motors
- Gear motors
- Gear pumps
- Hydraulic integrated circuits (HICs)
- Hydrostatic motors
- Hydrostatic pumps
- Orbital motors
- PLUS+1® controllers
- PLUS+1® displays
- PLUS+1® joysticks and pedals
- PLUS+1® operator interfaces
- PLUS+1® sensors
- PLUS+1® software
- PLUS+1® software services, support and training
- Position controls and sensors
- PVG proportional valves
- Steering components and systems
- Telematics

Danfoss Power Solutions is a global manufacturer and supplier of high-quality hydraulic and electric components. We specialize in providing state-of-the-art technology and solutions that excel in the harsh operating conditions of the mobile off-highway market as well as the marine sector. Building on our extensive applications expertise, we work closely with you to ensure exceptional performance for a broad range of applications. We help you and other customers around the world speed up system development, reduce costs and bring vehicles and vessels to market faster.

Danfoss Power Solutions – your strongest partner in mobile hydraulics and mobile electrification.

Go to www.danfoss.com for further product information.

We offer you expert worldwide support for ensuring the best possible solutions for outstanding performance. And with an extensive network of Global Service Partners, we also provide you with comprehensive global service for all of our components.

Local address:

Hydro-Gear

www.hydro-gear.com

Daikin-Sauer-Danfoss

www.daikin-sauer-danfoss.com

**Danfoss
Power Solutions (US) Company**
2800 East 13th Street
Ames, IA 50010, USA
Phone: +1 515 239 6000

**Danfoss
Power Solutions GmbH & Co. OHG**
Krokamp 35
D-24539 Neumünster, Germany
Phone: +49 4321 871 0

**Danfoss
Power Solutions ApS**
Nordborgvej 81
DK-6430 Nordborg, Denmark
Phone: +45 7488 2222

**Danfoss
Power Solutions Trading
(Shanghai) Co., Ltd.**
Building #22, No. 1000 Jin Hai Rd
Jin Qiao, Pudong New District
Shanghai, China 201206
Phone: +86 21 2080 6201