

Thru-Drive Vane Type Pump

(F3)-25VT*(M)-**A(M)2-**-*-22-*


AX438768149870en-000101

MODEL	ADAPTER PLATE	ADAPTER KIT	SPACER KIT	RETAINING RING	COUPLING	COUPLING KIT
VTA	584936	941296	02-136817	223172	426770	02-136810
VTB	584922	941297		89447 (1)	584926	02-136811
VTBP				89447 (2)	452865	02-136812

NOTE
FOR BP MODELS AN ADAPTER KIT
AND SPACER KIT IS REQUIRED.

MODEL	▲ SEAL KIT	F3 SEAL KIT
25VTA	920189	920190
25VTB	920191	920192
25VTBP	02-136927	02-136928

- ▲ Included in seal kit (See Table)
- Included in cartridge kit (See Table)
- ◆ Included in coupling kit (See Table)
- Included in adapter kit (See Table)
- △ Included in spacer kit (BP models only)
- F3 equivalent seal kit (See Table)
- Parts prefixed with symbols available only in kits

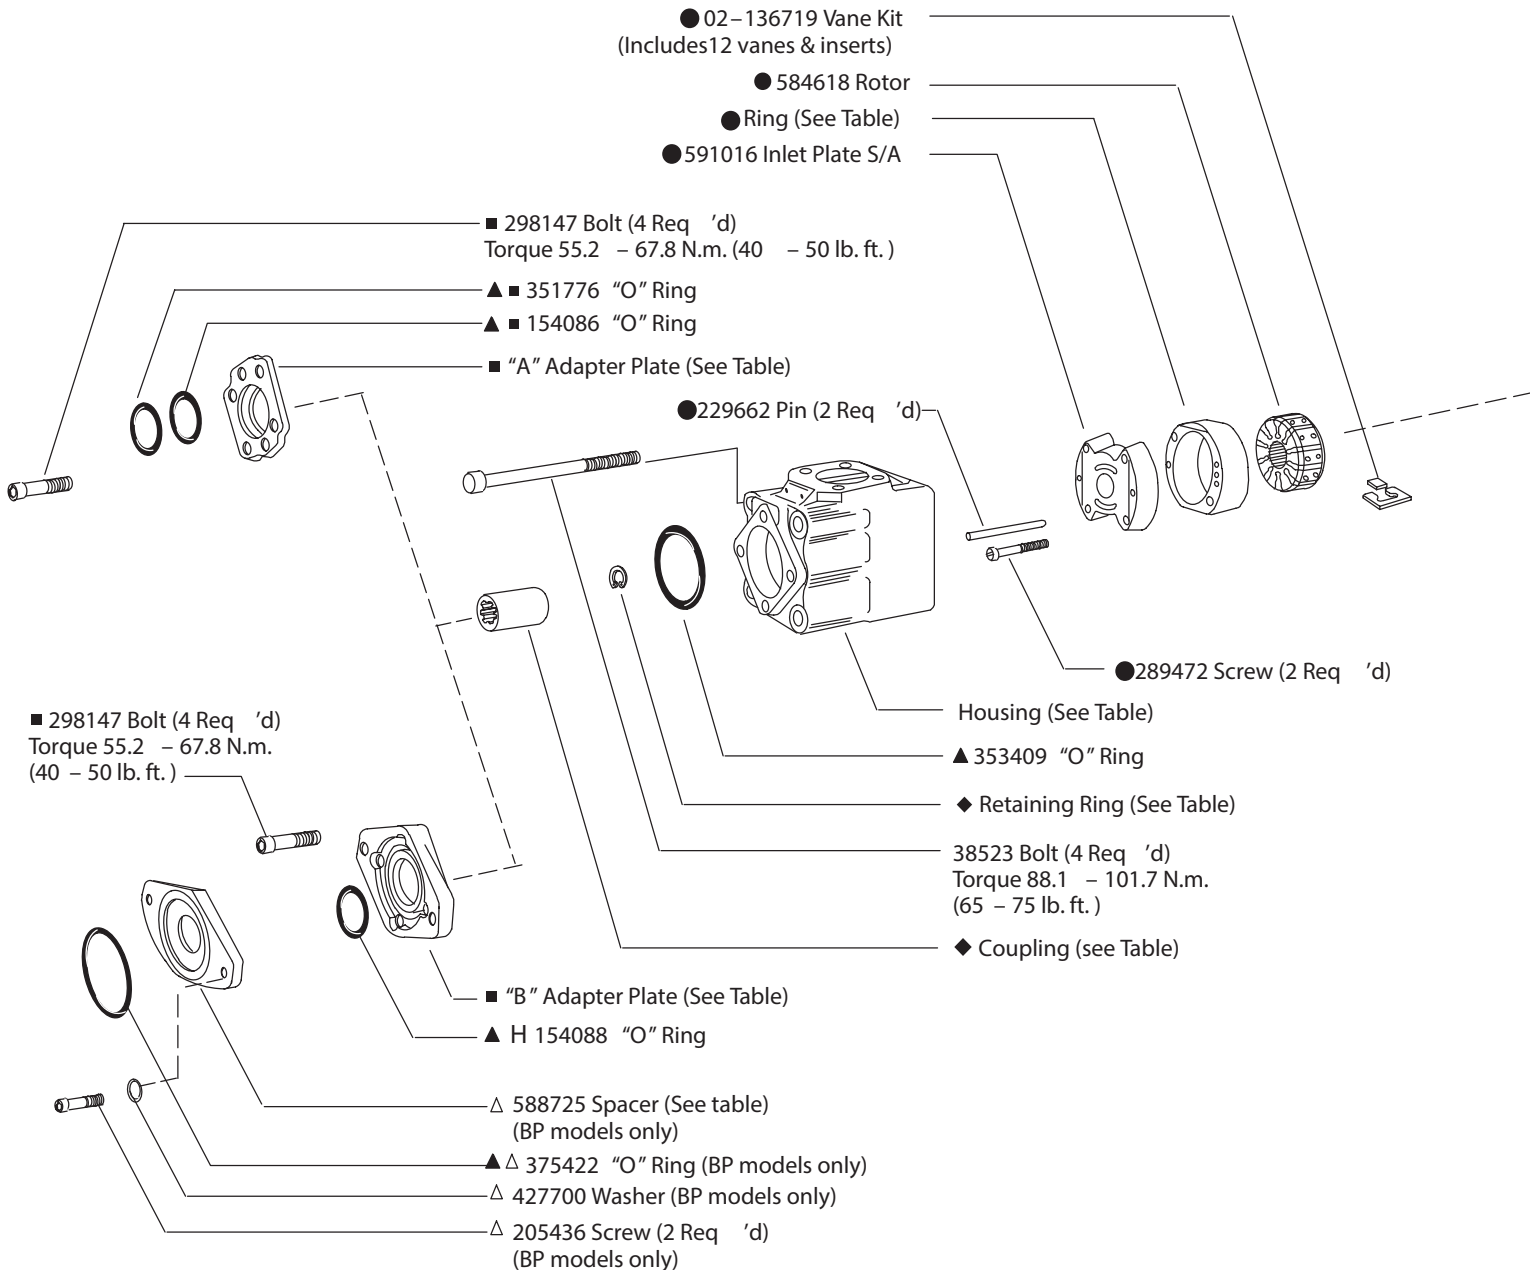


MODEL	● RING	● CART KIT	● F3 CART KIT
25VT**12	584610	02-102532	02-102540
25VT**14	584612	02-102533	02-102541
25VT**17	584614	02-102534	02-102542
25VT**21	584616	02-102535	02-102543

MODEL	SHAFT	KEY
25VTAS -*202	876124	3418
25VTAS -*203	876126	
25VTAS -*297	876121	
25VTAM -*292N	883314	472270
25VTBS -*202	876125	3418
25VTBS -*203	876127	
25VTBS -*297	876117	
25VTBM -*292N	883315	472270


MODEL	HOUSING	BODY S/A
25VT*S**A	251263	02-136915
25VT*S**AM	478505	02-136916
25VT*M**A	251236	02-136917
25VT*M**AM	478505	02-136918

□ Assemble shaft seal with spring loaded sealing member towards bearing. Seals to be completely wetted with oil prior to assembly.

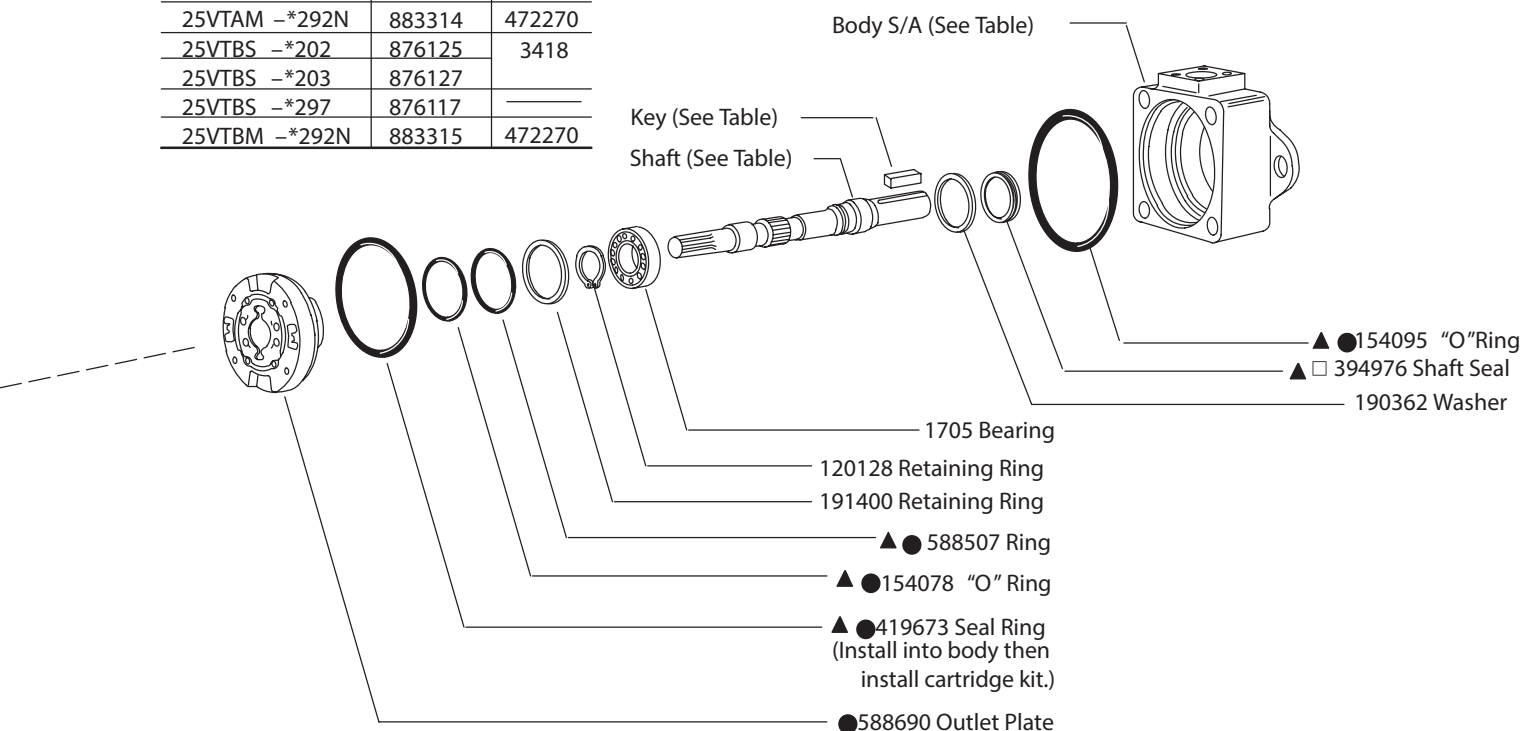


NOTE

For satisfactory service life of these components in industrial applications, use full flow filtration to provide fluid which meets ISO cleanliness code 16/13 or cleaner. OFP, OFR, and OFRS series filters are recommended.

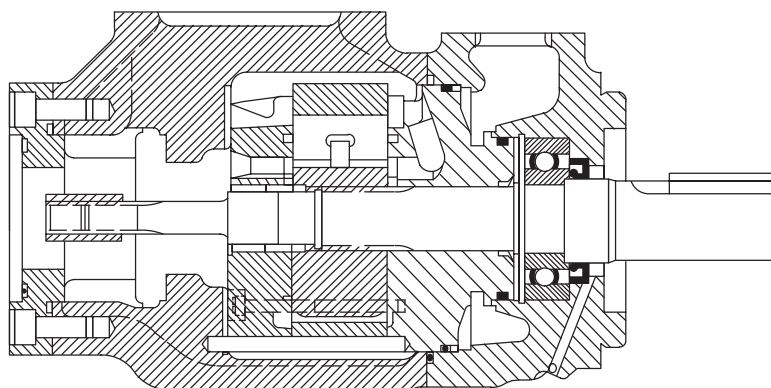

Model Code

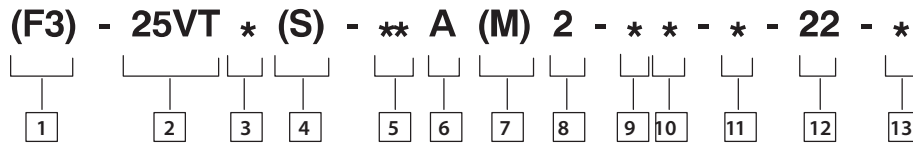

1 Viton seals

Omit – Standard

2 Thru drive series designation

25VT – 40 to 67 cm³/r
(2.47 to 4.13 in³/r)

3 Rear pump mounting SAE

(ISO 3019/1) 2 – bolt

A – 2-bolt SAE “A”
B – 2-bolt SAE “B”
BP – 2-bolt SAE “B” to mount
PVE19/21 (Includes spacer)

4 Pilot designation

M – ISO 3019/2 100A2HW
S – SAE – J744 flange

5 Geometric displacement

(Rated capacity (USgpm) at
1200 rpm, 6.9 bar (100 psi))

Frame Size	Code	cm ³ /r	in ³ /r
25V	12	40	2.47
T	14	45	2.78
	17	55	3.39
	21	67	4.13

6 Port connections

A – SAE 4 - bolt flange

7 Threads (4 bolt flange port)

M – Metric threads
(4 bolt flange)
Omit – Inch threads

8 Thru –drive coupling

2 – Coupling (included with pump)

Pump series	Tail shaft pump requirements
25VTA	SAE “A” size w/30 _ involute spline, 9T 16/32 D.P.
25VTB	SAE “B” size w/30 _ involute spline, 13T 16/32 D.P.

9 Shaft

202 – SAE ‘B’ square key
203 – SAE ‘BB’ square key
292N – ISO key 7mm x 8mm
(M pilot only)
297 – 13T 16/32 splined SAE ‘B’

10 Outlet positions

(Viewed from adapter end of pump)

A – Opposite inlet port
B – 90° CCW from inlet
C – Inline with inlet
D – 90° CW from inlet

11 Thru –drive adapter orientation

(Viewed from adapter end of pump)

A adapter

A – Rotate 45° CW with respect
to pump mounting flange
B – Rotate 45° CCW with respect
to pump mounting flange

B adapter

A – Inline with pump mounting flange
B – Rotate 90° with respect to pump
mounting flange

12 Design

13 Rotation

(Viewed from shaft end of pump)


L – Left hand for counterclockwise
R – Right hand for clockwise

NOTE

To reverse cartridge kit rotation, remove the two screws and reverse the location of the inlet support plate and outlet support plate. Re –install the two screws hand tight. Use pump cover to align all sections of the cartridge. Carefully remove the cover and tighten the screws.

NOTE

When ordering spare cartridge parts, it is recommended they be obtained in cartridge kits. Kits are assembled and tested by Vickers® by Danfoss for either right or left hand rotation. If left hand rotation is required, it should be specified on parts order by adding suffix “L” to cartridge kit number.

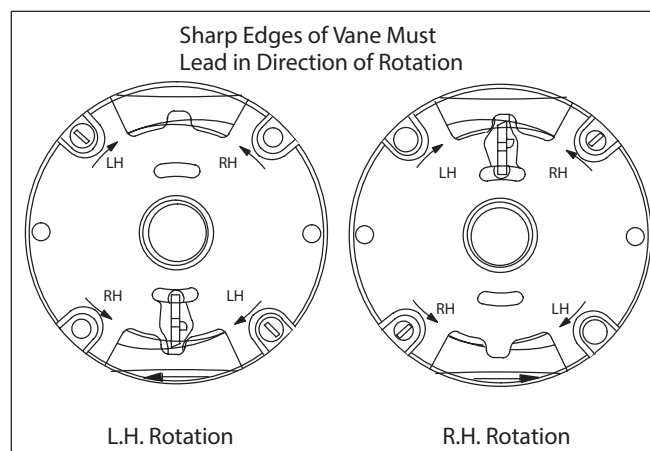

Products we offer:

- Cartridge valves
- DCV directional control valves
- Electric converters
- Electric machines
- Electric motors
- Gear motors
- Gear pumps
- Hydraulic integrated circuits (HICs)
- Hydrostatic motors
- Hydrostatic pumps
- Orbital motors
- PLUS+1® controllers
- PLUS+1® displays
- PLUS+1® joysticks and pedals
- PLUS+1® operator interfaces
- PLUS+1® sensors
- PLUS+1® software
- PLUS+1® software services, support and training
- Position controls and sensors
- PVG proportional valves
- Steering components and systems
- Telematics

Danfoss Power Solutions is a global manufacturer and supplier of high-quality hydraulic and electric components. We specialize in providing state-of-the-art technology and solutions that excel in the harsh operating conditions of the mobile off-highway market as well as the marine sector. Building on our extensive applications expertise, we work closely with you to ensure exceptional performance for a broad range of applications. We help you and other customers around the world speed up system development, reduce costs and bring vehicles and vessels to market faster.

Danfoss Power Solutions – your strongest partner in mobile hydraulics and mobile electrification.

Go to www.danfoss.com for further product information.

We offer you expert worldwide support for ensuring the best possible solutions for outstanding performance. And with an extensive network of Global Service Partners, we also provide you with comprehensive global service for all of our components.

Local address:

Hydro-Gear

www.hydro-gear.com

Daikin-Sauer-Danfoss

www.daikin-sauer-danfoss.com

**Danfoss
Power Solutions (US) Company**
2800 East 13th Street
Ames, IA 50010, USA
Phone: +1 515 239 6000

**Danfoss
Power Solutions GmbH & Co. OHG**
Krokamp 35
D-24539 Neumünster, Germany
Phone: +49 4321 871 0

**Danfoss
Power Solutions ApS**
Nordborgvej 81
DK-6430 Nordborg, Denmark
Phone: +45 7488 2222

**Danfoss
Power Solutions Trading
(Shanghai) Co., Ltd.**
Building #22, No. 1000 Jin Hai Rd
Jin Qiao, Pudong New District
Shanghai, China 201206
Phone: +86 21 2080 6201