


Directional Valves

Wet Armature Solenoid Operated Directional Valve



DG4S*-01*A-W(3)-*-50

DG4S*-01*A-W-*-50

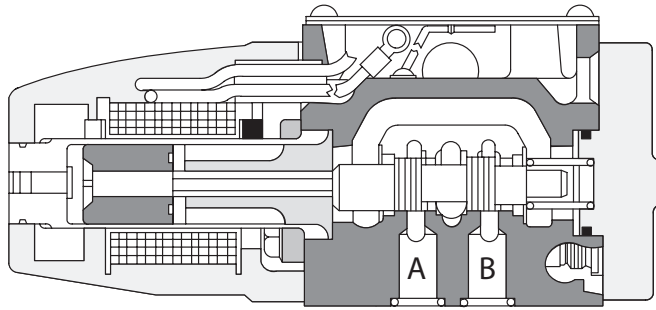

Note
Right hand assembly shown. For left hand assembly all parts, except body, are reversed. Example of left hand model: DG4S*-012A-W-*-50-LH.

Note
Part numbers prefixed with a symbol are available only as service kits.


*** Suffix symbol pertains only to Vickers material control

Model	Spool	Diagram Plate	Spool Kit
DG4S2-012A-W-*-50	573396	290347	940701
DG4S2-012A-W-*-50LH		577488	941010
DG4S4-010A-W-*-50	572287	290348	940703
DG4S4-010A-W-*-50LH		577490	941011
DG4S4-012A-W-*-50	463426	290348	940704
DG4S4-012A-W-*-50LH		577490	941012
DG4S4-016A-W-*-50	572288	290348	940705
DG4S4-016A-W-*-50LH		577490	941013

Spool kit includes spool, diagram plate, seal kit, and parts prefixed with a closed square symbol (■).

Coil Type	Core Tube S/A	
	"W" Non-Serviceable	♣ "W3" Serviceable
AC	◇926593	941034
DC	—	941035

♣ Included in serviceable (W3) Core Tube subassembly

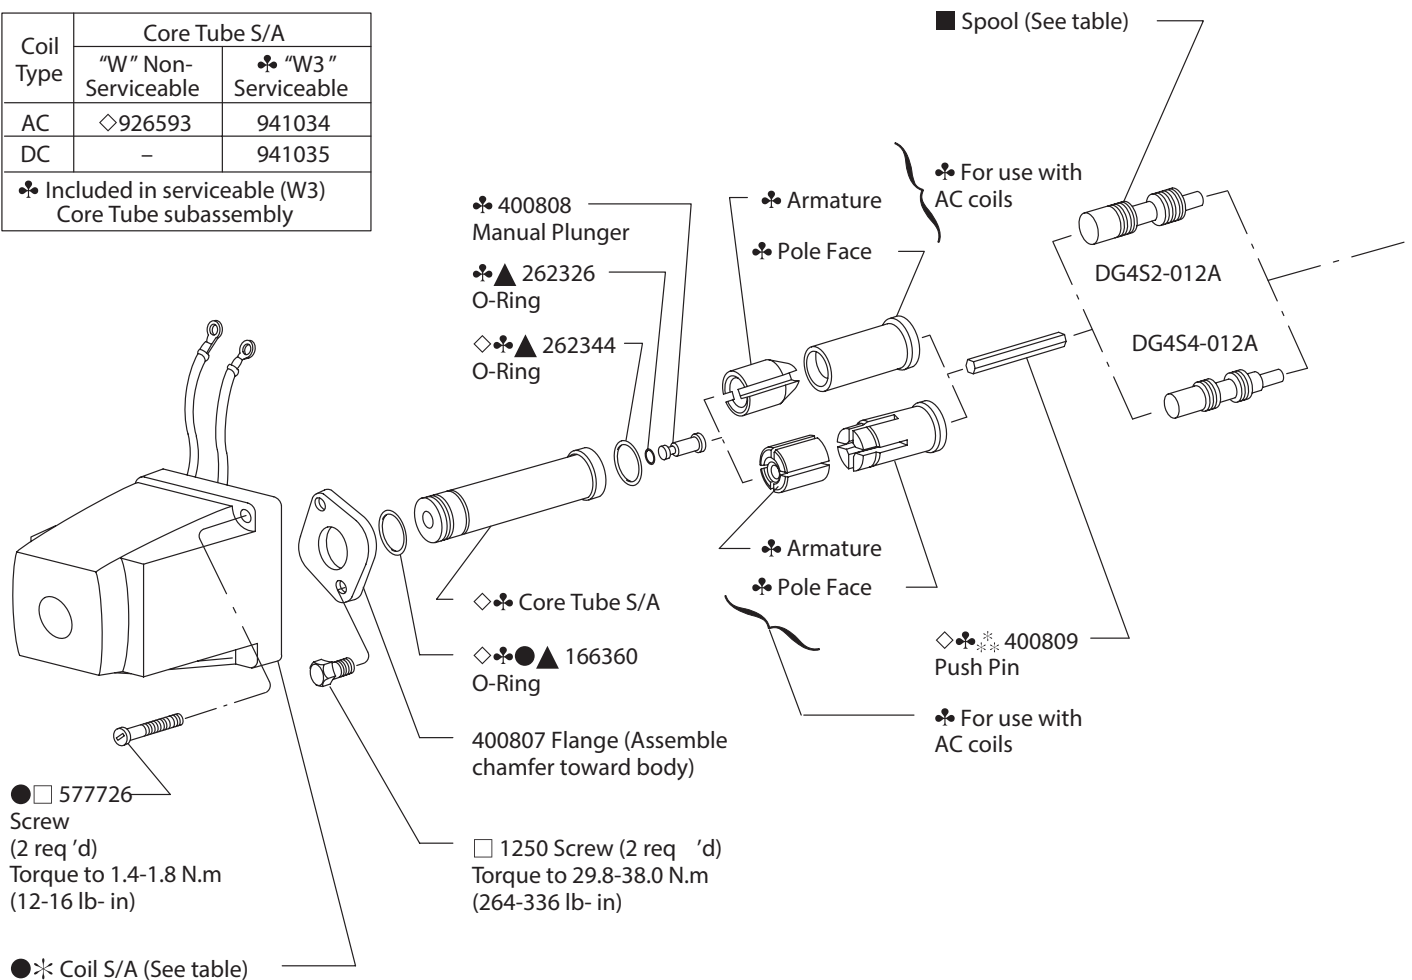

□ 174638 Screw (4 req 'd)
Torque to 0.8-0.9 N.m (7-9 lb-in)

Nameplate
(not available for sale)

286122 Gasket & Wire S/A

□ 36212 Screw

□ 11012 Screw
(4 req 'd)
Torque to 4.9-
6.0 N.m
(43-53 lb-in)

▲ 263493 O-Ring

■ 236451 Spring

▲ 262344
O-Ring

407533 Plug
Torque to
12.1-12.4 N.m
(107-110 lb-ft)

400846 Cover

407533 Plug
Torque to
12.1-12.4 N.m
(107-110 lb-ft)

▲ 263493 "O" Ring

■ Diagram Plate (See table)

●▲ 400815 Gasket

●▲ 262334
O-Ring
(F3 Viton - 5 req 'd)

□■ 416834 Rivet (4 req 'd)

● Included in Coil Kit

● Coil S/A	Coil Kit	AC Volt/Hz	DC Volt	Coil Code	DIN Coil
400823	942466	110/50, 115/60, 120/60		B	463328
400824	942467	220/50, 230/60		D	463329
400825	942468	440/50, 460/60		M	463330
400826	942469		12	G	463331
400827	942470		24	H	463332
435755	941017	127/50		EG	
582214	941109		250	X	617244
730273	926461		48	J	
		100/50, 100/60		T	977929
		380/50, 380/60		DZ	617370

▲ Included in F3 Seal Kit 920109


□ Included in Fastener Kit 942465



* CAUTION
Correct armature and pole face must be used for AC and DC operation.

Model Code

(F3) - DG4S** - 01 * A - W3 - * - 50 - (LH)



1 Seal Material F3 - Seals for mineral oil and fire resistant fluids	4 Solenoid Indicator Lights L - Light Omitted - None	8 Wet Artmature Type W - Non-serviceable Core Tube S/A W3 - Serviceable Core Tube S/A
2 Model Series DG4S** - Directional valve, manifold or subplate mounting, solenoid operated, sliding spool	5 Series	9 Coil Identification Letter
3 Flow Direction 2 - 2 way 4 - 4 way	6 Spool Type	9 Design
	7 Offset A	9 Left Hand Assembly




* WARNING
Use this drawing for parts information only.

For Models with Solenoid Indicator Lights

Solenoid Indicator Light Kit (Includes all parts identified)	
Voltage Range	Kit
100 thru 127	941615
192 thru 233	941617

Note
Refer to parts drawing I-3487-S for models with plug-in feature.

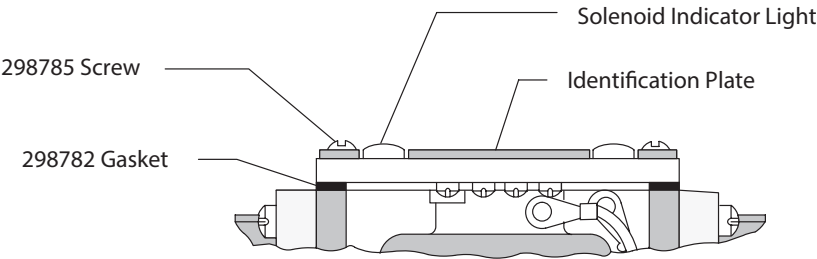

For satisfactory service life of these components, use full flow filtration to provide fluid which meets ISO cleanliness code 20/18/15 or cleaner. Selections from Danfoss OF P, OFR, and OFRS series are recommended.

Products we offer:

- Cartridge valves
- DCV directional control valves
- Electric converters
- Electric machines
- Electric motors
- Gear motors
- Gear pumps
- Hydraulic integrated circuits (HICs)
- Hydrostatic motors
- Hydrostatic pumps
- Orbital motors
- PLUS+1® controllers
- PLUS+1® displays
- PLUS+1® joysticks and pedals
- PLUS+1® operator interfaces
- PLUS+1® sensors
- PLUS+1® software
- PLUS+1® software services, support and training
- Position controls and sensors
- PVG proportional valves
- Steering components and systems
- Telematics

Hydro-Gear

www.hydro-gear.com

Daikin-Sauer-Danfoss

www.daikin-sauer-danfoss.com

Danfoss Power Solutions is a global manufacturer and supplier of high-quality hydraulic and electric components. We specialize in providing state-of-the-art technology and solutions that excel in the harsh operating conditions of the mobile off-highway market as well as the marine sector. Building on our extensive applications expertise, we work closely with you to ensure exceptional performance for a broad range of applications. We help you and other customers around the world speed up system development, reduce costs and bring vehicles and vessels to market faster.

Danfoss Power Solutions – your strongest partner in mobile hydraulics and mobile electrification.

Go to www.danfoss.com for further product information.

We offer you expert worldwide support for ensuring the best possible solutions for outstanding performance. And with an extensive network of Global Service Partners, we also provide you with comprehensive global service for all of our components.

Local address:

**Danfoss
Power Solutions (US) Company**
2800 East 13th Street
Ames, IA 50010, USA
Phone: +1 515 239 6000

**Danfoss
Power Solutions GmbH & Co. OHG**
Krokamp 35
D-24539 Neumünster, Germany
Phone: +49 4321 871 0

**Danfoss
Power Solutions ApS**
Nordborgvej 81
DK-6430 Nordborg, Denmark
Phone: +45 7488 2222

**Danfoss
Power Solutions Trading
(Shanghai) Co., Ltd.**
Building #22, No. 1000 Jin Hai Rd
Jin Qiao, Pudong New District
Shanghai, China 201206
Phone: +86 21 2080 6201

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.