

Relief Valves



Multi-Pressure Relief Valves

(F3)— C/G/S/T—06/10(*)—DG—OA(L)**—(S*)***** (L)*****—40/50**

NOTE: Lubricate all parts & seals with a thin coat of oil at assembly.



Caution
Use only a DG4V3(S)–OA–60 or DG4V3(S)–OAL–60 directional valve as a pilot for this relief valve. Use of a different pilot can block relief valve, causing excessive system pressure.

DG4V3(S)–OA(L)–60 Pilot valve (Refer to parts drawing for detailed information).

255698 Bolt kit (Torque 4.5–5.6 N.m.)

40–50 lb. in. (Pilot valve to adapter plate mounting) Not shown

255651 Bolt kit (Torque 14.9–20.3 N.m.)

11 – 15 lb.ft. (Adapter plate to cover mounting)

422814 Adapter plate

▲ 113000 Plug (4 Req'd)

△▲ 262334 "O" Ring (4 Req'd)

○● Cover (see table)

○● 290057 Piston (2 Req'd)

○● Cover spring (see table)

○●△▲ 262332 "O" Ring (2 Req'd)

○●△▲ 197570 BU–Ring (2 Req'd)

○● 370701 Plunger (2 Req'd)

○● *▲ 292230 ADJ. screw (2 Req'd)

○● *▲ 1485 Locknut (2 Req'd)

○● *▲ 283949 Lockscrew (2 Req'd)

○● □▲ 64520 Washer (As req'd)

○● □▲ 326317 Washer (As req'd)

* NOTE: Coat 292230 ADJ. screw, 283949 lockscrew and 1485 locknut with oil prior to assembly.

□ NOTE: These parts used at final test to obtain correct pressure range.

○●△▲ 263497 "O" Ring (2 Req'd)
○●▲ 329463 Plug (3 Req'd)
Torque 52.8–58.3 N.m. (39–43 lb. ft.)

○ 294656 Restrictor plug (2 Req'd) C*–10 only

○● 285601 Seat (2 Req'd)
Assemble cross hole facing up

▲ 226816 Rollpin
Lockwasher (see table)

Screw (see table)

▲ 113000 Plug (C*–06 5 Req'd)
○ (C*–10 7 Req'd)

○● 370839 Warning plate
○●▲ 227405 Screw (4 Req'd)

Hi–Vent spring (C*–10) See table
Lo–Vent spring (C*–06/10) See table

Hi–Vent spring (C*–06 only) See table

Hydrocone (see table)

Seat (see table)

△▲ 262361 "O" Ring (C*–06)
262367 "O" Ring (C*–10)

Model	Seat	Hydrocone	Lo–Vent spring	Hi–Vent spring	Cover
C*–06	343153	343154	2077	184458	● 370666
C*–10	283954	283952	291822	291821	○ 370671


NOTE: Use either a Lo–Vent or Hi–Vent spring. Do not use both. (See model code.)

NOTE

For satisfactory service life of these components in industrial applications, use full flow filtration to provide fluid which meets ISO cleanliness code 18/15 or cleaner. OFP, OFR, and OFRS series filters are recommended.

Model	Screw (4 Req'd)	Torque		Lock Washer (4 Req'd)
		lb. ft.	N.m.	
C*-06	1036	11-15	14.9-20.3	68907
C*-10	1076	35-43	47.5-58.3	68909


Sectional "E" vent head 1 or 3

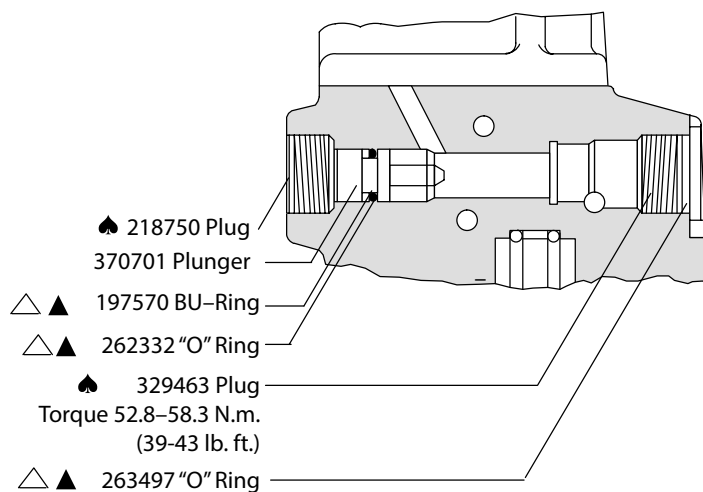


Model	Cover spring	Pressure range psi (bar)
C*-*-B	2280	125-1000 (8.5-70)
C*-*-C	583937	500-2000 (35-140)
C*-*-F	2281	1500-3000 (105-210)

♠ Part	Kit
1485	944064
AX-36212	944053
64520	944068
113000	944055
160571	944069
218750	944070
226816	944071
227405	944074
292230	944072
326317	944073
329463	944041
343740	944038

Parts with ♠ available only in kits of 25.
Reference kit on parts order.

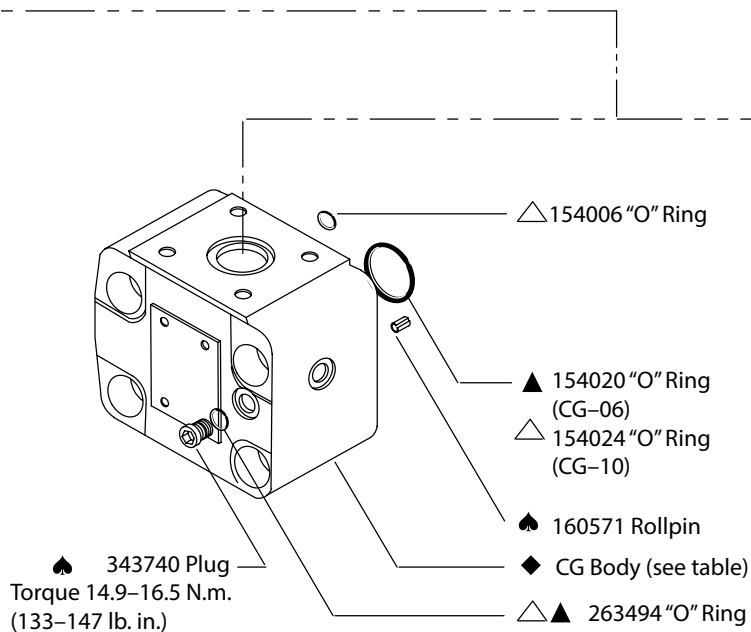


Model	◆ Body
	-06 -10
CG	580456 581703
CS	581701 580430
CT	590348 590300

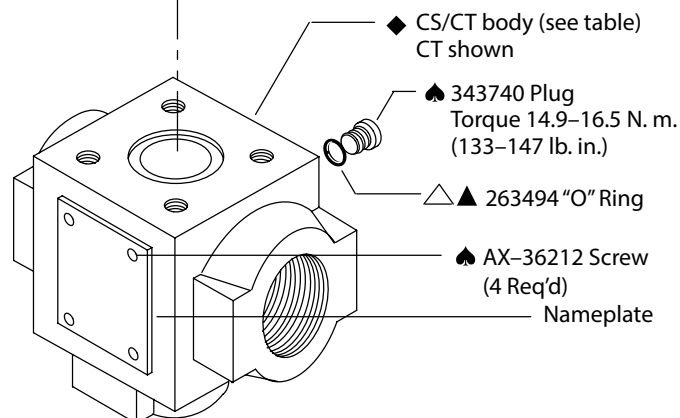

- ▲ Included in -06 F3 seal kit 919684
- △ Included in -06 F3 seal kit 919685
- Included in CT-06-BC cover kit 942155
- Included in CT-10-BC cover kit 942156
- ♠ Available only in kits of 25.
- ◆ Not available for sale

Model Code

(F3) - C* ** - **(*) (V) - DG - ** (L) ** - (V) M - (S*) - * - ** - * - * (L) - ** * - *** - ** - EN**



1 Seals for mineral oil & fire resistant fluids

2 Relief valve connections

G – Subplate Mounting
S – Straight threads
T – NPTF threads

3 Valve size

06 – 3/4"

10 – 1-1/4"

4 Pressure range

B – 125–1000 psi

C – 500–2000 psi

F – 1500–3000 psi

E – Vent

5 High vent

Blank – Omit for low vent models

6 Directional valve

7 Spool type & spring arrangement

0A(L) – Spring offset

8 Left hand build

Omit for standard models

9 Manual override options (included in pilot valve model code)

Blank – Plain override solenoid ends only

H – Waterproof override solenoid ends only

H2 – Waterproof override both ends of single solenoid

M – Serviceable manual overrides in solenoid ends only

P2 – Plain override both ends of single solenoid

Y – Lockable manual overrides solenoid ends only

Z – No overrides in either end

10 Solenoid energization identity

Blank – Standard arrangement for ANSI B93.9 (energise solenoid A for flow P to A port)

V – Solenoid identification determined by position of solenoid. (Solenoid A at port A end and/or solenoid B at port B end.

11 Flag symbol heading electrical options and features

12 Spool position monitoring switch (tank pressure rating 10 bar only)

S1 – Switch, normally open, U coils only

S2 – Switch, normally closed, U coils only

S3 – Switch, wired normally open, P*

S4 – Switch, wired normally cclosed, P*

S5 – Switch, free leads, FW & FJ only

Omit if not required

13 Coil type

U – ISO 4400

P – Plug in coil

F – Flying lead

SP1 – Single, 6,3 series spade to IEC 760

SP2 – Dual 6,3 series spade to IEC 760

14 Electrical connections (F type coil only) Omit if not required

T – Wired terminal block

PA – Instaplug male receptacle only

PB – Instaplug male & female receptacle

PA3 – Three pin connector & terminal block

PA5 – Five pin connector & terminal block

15 Housing (F) type coils only

W – 1/2 NPT thread wiring housing

J – 20 mm thread wiring housing

16 Electrical options

1 – ISO with fitted plug, U type coils only

7 – Surge damper, P type coils only

9 – Rectifier (fast type) P type coils only

12 – Rectifier (slow type) P type coils only

17 Soleinoid indicator lights (F build only) To be used with T terminal block models.

(Omit if not required)

18 Coil indentification

19 Pilot valve code (tank pressure rating)

2 – 10 bar (145 psi) use with switch models S*

5 – 100 bar (1450 psi) for all other models

20 Pilot valve port orifices

21 Design

40 – DG4V3S–60

Standard pilot valve

50 – DG4V3–60

High performance pilot valve

22 Special modifications (omit if not required)

7 Thru 20 included in pilot valve model code

Products we offer:

- Cartridge valves
- DCV directional control valves
- Electric converters
- Electric machines
- Electric motors
- Gear motors
- Gear pumps
- Hydraulic integrated circuits (HICs)
- Hydrostatic motors
- Hydrostatic pumps
- Orbital motors
- PLUS+1® controllers
- PLUS+1® displays
- PLUS+1® joysticks and pedals
- PLUS+1® operator interfaces
- PLUS+1® sensors
- PLUS+1® software
- PLUS+1® software services, support and training
- Position controls and sensors
- PVG proportional valves
- Steering components and systems
- Telematics

Danfoss Power Solutions is a global manufacturer and supplier of high-quality hydraulic and electric components. We specialize in providing state-of-the-art technology and solutions that excel in the harsh operating conditions of the mobile off-highway market as well as the marine sector. Building on our extensive applications expertise, we work closely with you to ensure exceptional performance for a broad range of applications. We help you and other customers around the world speed up system development, reduce costs and bring vehicles and vessels to market faster.

Danfoss Power Solutions – your strongest partner in mobile hydraulics and mobile electrification.

Go to www.danfoss.com for further product information.

We offer you expert worldwide support for ensuring the best possible solutions for outstanding performance. And with an extensive network of Global Service Partners, we also provide you with comprehensive global service for all of our components.

Local address:

Hydro-Gear

www.hydro-gear.com

Daikin-Sauer-Danfoss

www.daikin-sauer-danfoss.com

**Danfoss
Power Solutions (US) Company**
2800 East 13th Street
Ames, IA 50010, USA
Phone: +1 515 239 6000

**Danfoss
Power Solutions GmbH & Co. OHG**
Krokamp 35
D-24539 Neumünster, Germany
Phone: +49 4321 871 0

**Danfoss
Power Solutions ApS**
Nordborgvej 81
DK-6430 Nordborg, Denmark
Phone: +45 7488 2222

**Danfoss
Power Solutions Trading
(Shanghai) Co., Ltd.**
Building #22, No. 1000 Jin Hai Rd
Jin Qiao, Pudong New District
Shanghai, China 201206
Phone: +86 21 2080 6201

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed.
All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.