


Relief Valves

AX446572803932en-000101




Balanced Piston Type Relief & Sequence Valves

(F3)C*-**-*- (V)(Y)-50

"Y" Cover Assembly
(See table)

Model	■ Cover	Spring (Outer)	Spring (Inner)	■ Spring	Pressure Range PSI	■ Included in Cover S/A
C*-0*-B-50	581702		2077	2280	125-1000	941280
C*-0*-BV-50		184458				
C*-0*-BVY-50	590307		2077	583937	500-2000	941283
C*-0*-BY-50						
C*-0*-C-50	581702					941281
C*-0*-CV-50		184458				
C*-0*-CVY-50	590307		2077	2281	1500-3000	941284
C*-0*-CY-50						
C*-0*-F-50	581702					941282
C*-0*-FV-50		184458				
C*-0*-FVY-50	590307		2077		941285	
C*-0*-FY-50						

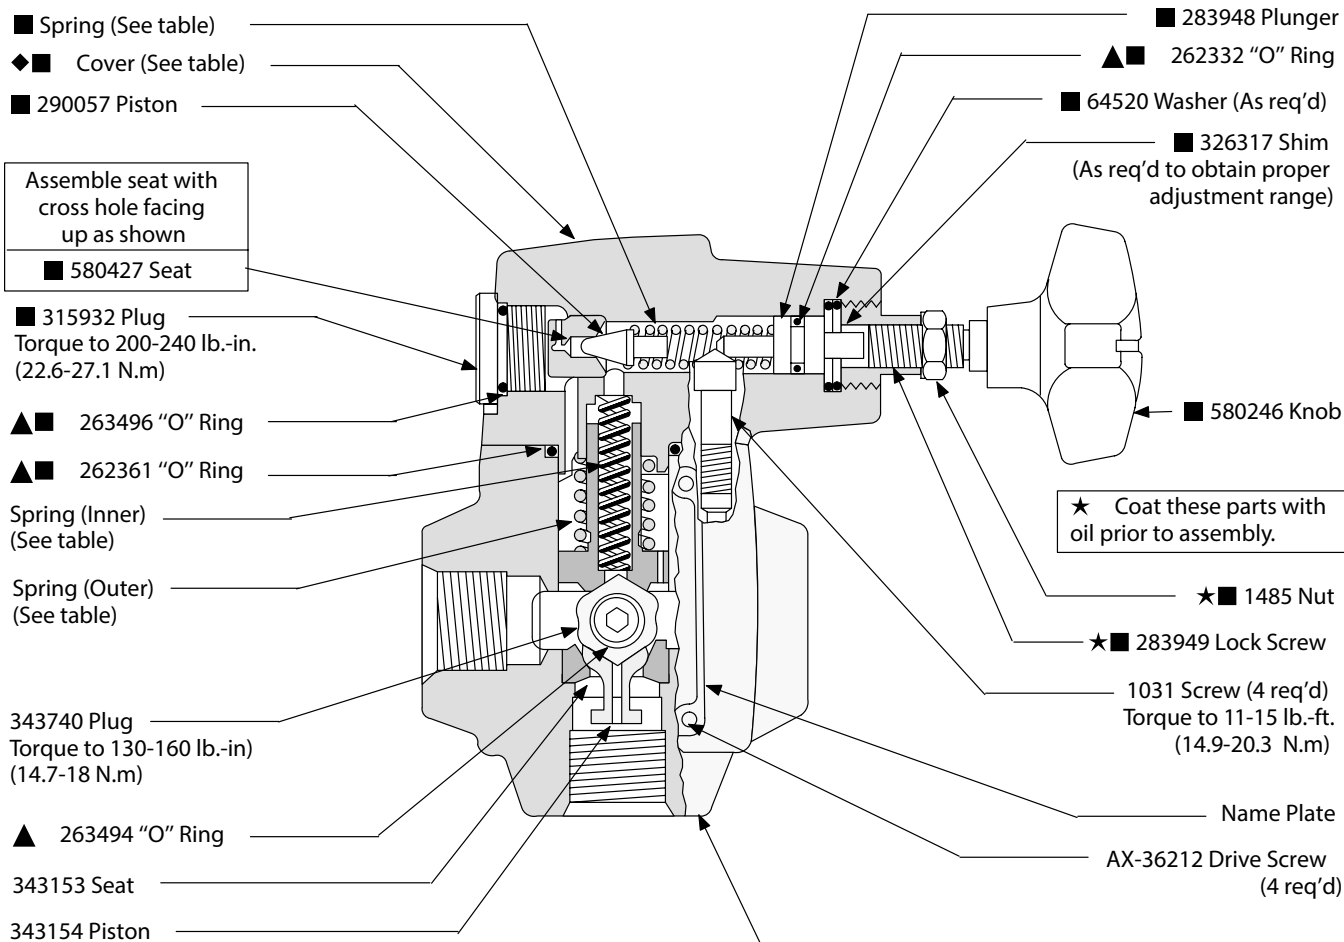


Model	◆ Body
CS-03-*(V)-50	590407
CS-06-*(V)(Y)-50	581701
CT-06-*(V)(Y)-50	590348

◆ Not available for sale
as individual parts

▲ Included in F3 Seal Kit 919922

Model Code Breakdown

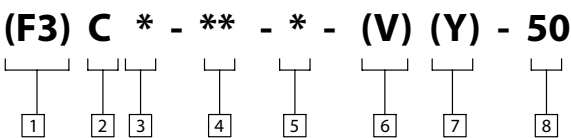

1 Seals

F3 - Multi-fluid capability (Viton ® seals)

Viton is a registered trademark of E.I. DuPont

2 Model Series

C - Relief valve

3 Thread Type

S - SAE straight
T - NPTF pipe

4 Size

03 - 3/8 inch
06 - 3/4 inch

5 Pressure Range

B - 125-1000
C - 500-2000
F - 1500-3000

6 Vent Pressure

V - High vent pressure
(Omit for standard vent pressure.)

7 External Drain Feature

Y - Sequence valve
(Omit for standard relief.)

8 Design

For satisfactory service life of these components, use full flow filtration to provide fluid which meets ISO cleanliness code 18/15 or cleaner. Selections from Danfoss OFP, OFR and OFRS filter series are recommended.

Products we offer:

- Cartridge valves
- DCV directional control valves
- Electric converters
- Electric machines
- Electric motors
- Gear motors
- Gear pumps
- Hydraulic integrated circuits (HICs)
- Hydrostatic motors
- Hydrostatic pumps
- Orbital motors
- PLUS+1® controllers
- PLUS+1® displays
- PLUS+1® joysticks and pedals
- PLUS+1® operator interfaces
- PLUS+1® sensors
- PLUS+1® software
- PLUS+1® software services, support and training
- Position controls and sensors
- PVG proportional valves
- Steering components and systems
- Telematics

Hydro-Gear

www.hydro-gear.com

Daikin-Sauer-Danfoss

www.daikin-sauer-danfoss.com

Danfoss Power Solutions is a global manufacturer and supplier of high-quality hydraulic and electric components. We specialize in providing state-of-the-art technology and solutions that excel in the harsh operating conditions of the mobile off-highway market as well as the marine sector. Building on our extensive applications expertise, we work closely with you to ensure exceptional performance for a broad range of applications. We help you and other customers around the world speed up system development, reduce costs and bring vehicles and vessels to market faster.

Danfoss Power Solutions – your strongest partner in mobile hydraulics and mobile electrification.

Go to www.danfoss.com for further product information.

We offer you expert worldwide support for ensuring the best possible solutions for outstanding performance. And with an extensive network of Global Service Partners, we also provide you with comprehensive global service for all of our components.

Local address:

**Danfoss
Power Solutions (US) Company**
2800 East 13th Street
Ames, IA 50010, USA
Phone: +1 515 239 6000

**Danfoss
Power Solutions GmbH & Co. OHG**
Krokamp 35
D-24539 Neumünster, Germany
Phone: +49 4321 871 0

**Danfoss
Power Solutions ApS**
Nordborgvej 81
DK-6430 Nordborg, Denmark
Phone: +45 7488 2222

**Danfoss
Power Solutions Trading
(Shanghai) Co., Ltd.**
Building #22, No. 1000 Jin Hai Rd
Jin Qiao, Pudong New District
Shanghai, China 201206
Phone: +86 21 2080 6201

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.