




Wet Armature Directional Control Valves

DG4S*-01*A/F-(U)-*-60

COIL S/A	COIL KIT	VOLTAGE		DC VOLT	COIL CODE	DIN COIL-KIT	DIN COIL S/A
		60 HZ	50HZ				
868982	892995	120	110		B	893007	879141
868983	892996	240	220		D	893008	879143
868984	892997	460	440		M	893009	879231
868985	892998		127		EG	893010	879232
879211			240		ED		879142
879212			110		A		879144
879213			220		C		879227
879214			24		NN		879228
879215	893003	100	100		T	893015	879229
879216	893004	380	380		DZ	893016	879230
02-101843		24	24		N		02-101845
02-101976		200	200		OV		02-127060
868987	892999			12	G	893011	879146
868988	893000			24	H	893012	879147
868986	893001			48	J	893013	879148
868990				110	P		879226
868991				100	R		879225
868992	893002			250	X	893014	879224
879233				125	DP		879149
02-119664		48	48		K		02-127061
02-119665			48		KK		02-127062
02-119666		24			NV		02-127063
02-300515		220			DN		02-300519
02-300516		115			EK		02-300520
02-300517		110	100		BX		02-300521
02-300518		320	200		DX		02-300522





MODEL	PART NO.	SPOOL KIT
DG4S2-012A-(RH)	573396	893200
DG4S2-012A -(LH)	573396	893201
DG4S4-010A-(RH)	572287	893202
DG4S4-010A-(LH)	572287	893203
DG4S4-012A-(RH)	463426	893204
DG4S4-012A-(LH)	463426	893205
DG4S4-016A-(RH)	572288	893206
DG4S4-016A-(LH)	572288	893207
DG4S4-017A-(RH/LH)	502121	893208
DG4S4-010F-(RH/LH)	572287	893143
DG4S4-011F-(RH/LH)	868617	893144
DG4S4-012F-(RH/LH)	463426	893145
DG4S4-013F-(RH/LH)	477155	893146
DG4S4-016F-(RH/LH)	572288	893147
DG4S4-017F-(RH/LH)	502121	893148

DIN Coil Mating Receptacle



DIN Coil (See Table)

879209 Plug (2 Req'd)

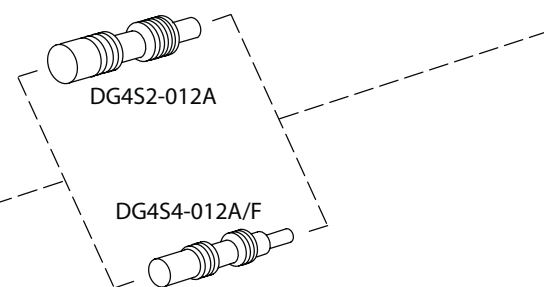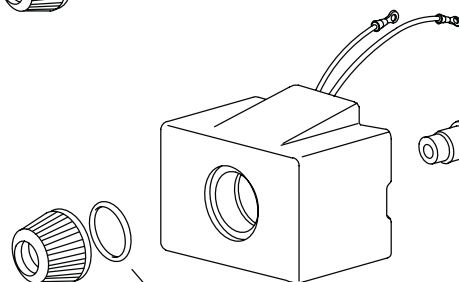

868953 Stop

02-153961 Push Pin (A)

02-140344 Push Pin (F)

262338 "O" Ring

Δ Core Tube S/A

AC -02-153967

DC -879169

◇ Coil (see table)


▲ ◇• 187000 "O" Ring

879172

DC Coils with Surge Suppression Device Encapsulated			
Coil S/A	DC Voltage	DIN Coil S/A	Coil Code
02-154795	12	02-154798	G
02-154767	24	02-154796	H

Refer to model code for ordering with surge suppression.

MODEL	DIAGRAM PLATE
DG4S2-012A	
	290347 (R.H.)
	577488 (L.H.)
DG4S4-01*A	
	290348 (R.H.)
	577490 (L.H.)
TYPE 7 SPOOL	290339 (R.H./L.H.)
DG4S4-01*F	290339

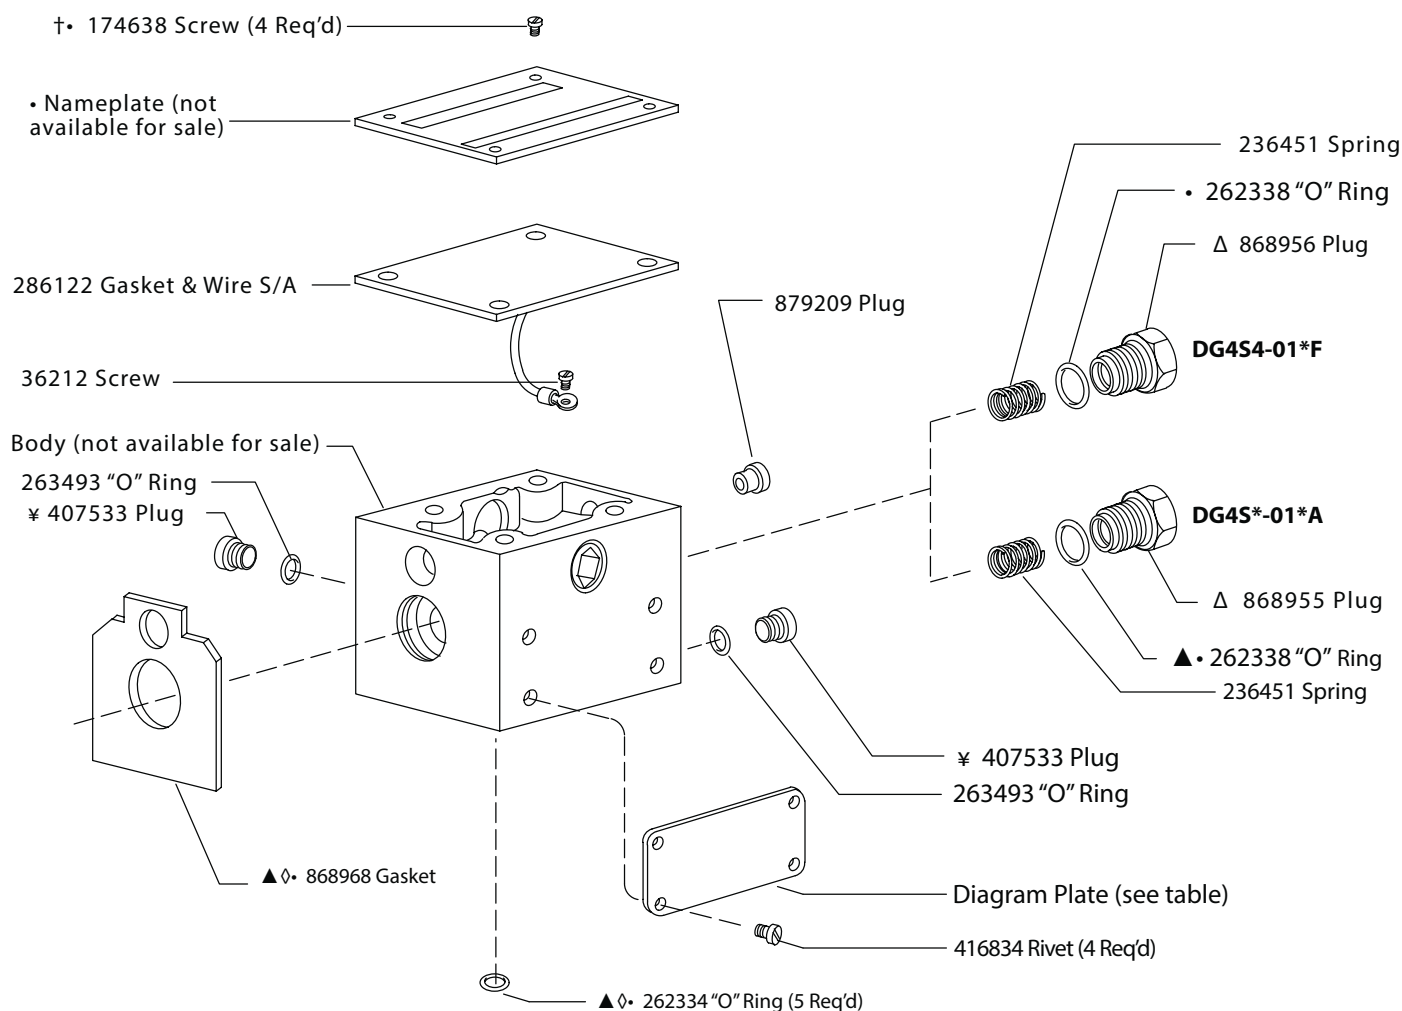

Note

Right hand assembly shown. For left hand assembly (-LH models), all parts of valve except body are reversed. Use left hand diagram plate.

Note

Parts numbers prefixed with symbols available only in kits.


Note

For satisfactory service life of these components in industrial applications, use full flow filtration to provide fluid which meets ISO cleanliness code 18/15 or cleaner.

- ▲ Included in F3 Seal Kit 892976
- ‡ Included in Fastener Kit 893005
- Included in Spool Kit
- ♦ Included in Coil Kit
- Δ Torque 24-29 Nm (18-22 lbf.ft.)
- ¥ Torque 12.1-12.4 Nm (107-110 lbf.ft.)
- † Torque 0.8-1.01 Nm (7-9 lbf.ft.)

Model Code


(F3) D G 4 S 4 ** - 01 * A - (U) * - * - 60 - (LH)



1 Special Seals Blank - Standard seals F3 - Special seals	7 Electrical Accessories L - Solenoid indicator lights W - Wiring housing LW - Wiring housing with indicator lights WT - Wiring housing with terminal strip	11 Wet Armature Solenoid (non-serviceable core tubes) Blank - Flying lead coils U - DIN 43650 coils w/o electrical plug
2 Directional Control Valve	8 Interface 01 - ISO-4401-AC-50-4-A NFPA D05 (1/8 in. nominal size)	12 Coil Type 7 - Coil with surge suppression (DC models only 12 & 24V DC)
3 Manifold or Subplate Mounted	9 Spool Types "A" Models - 0, 2, 6, 7, & 2-way "B" Models - 0, 1, 2, 3, 6 & 7	13 Coil Identification Letters
4 Solenoid Operated	10 Spool/Spring Arrangement A - Spring offset P to A F - Spring offset P to A; shift to center	14 Design
5 Sliding Spool		15 Left-Hand Assembly (omit for right-hand assembly)
6 Flow Direction 2 - Two way 4 - Four way		

Light Kits

Solenoid Indicator Light Kit (Includes all parts identified)	
Voltage Range	Kit
100 thru 127	941615
192 thru 233	941617

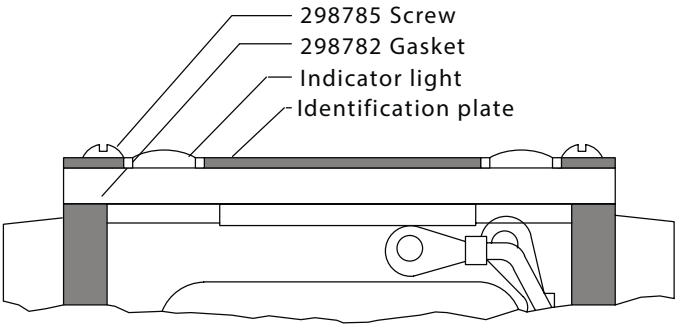

Products we offer:

- Cartridge valves
- DCV directional control valves
- Electric converters
- Electric machines
- Electric motors
- Gear motors
- Gear pumps
- Hydraulic integrated circuits (HICs)
- Hydrostatic motors
- Hydrostatic pumps
- Orbital motors
- PLUS+1® controllers
- PLUS+1® displays
- PLUS+1® joysticks and pedals
- PLUS+1® operator interfaces
- PLUS+1® sensors
- PLUS+1® software
- PLUS+1® software services, support and training
- Position controls and sensors
- PVG proportional valves
- Steering components and systems
- Telematics

Danfoss Power Solutions is a global manufacturer and supplier of high-quality hydraulic and electric components. We specialize in providing state-of-the-art technology and solutions that excel in the harsh operating conditions of the mobile off-highway market as well as the marine sector. Building on our extensive applications expertise, we work closely with you to ensure exceptional performance for a broad range of applications. We help you and other customers around the world speed up system development, reduce costs and bring vehicles and vessels to market faster.

Danfoss Power Solutions – your strongest partner in mobile hydraulics and mobile electrification.

Go to www.danfoss.com for further product information.

We offer you expert worldwide support for ensuring the best possible solutions for outstanding performance. And with an extensive network of Global Service Partners, we also provide you with comprehensive global service for all of our components.

Local address:

Hydro-Gear

www.hydro-gear.com

Daikin-Sauer-Danfoss

www.daikin-sauer-danfoss.com

**Danfoss
Power Solutions (US) Company**
2800 East 13th Street
Ames, IA 50010, USA
Phone: +1 515 239 6000

**Danfoss
Power Solutions GmbH & Co. OHG**
Krokamp 35
D-24539 Neumünster, Germany
Phone: +49 4321 871 0

**Danfoss
Power Solutions ApS**
Nordborgvej 81
DK-6430 Nordborg, Denmark
Phone: +45 7488 2222

**Danfoss
Power Solutions Trading
(Shanghai) Co., Ltd.**
Building #22, No. 1000 Jin Hai Rd
Jin Qiao, Pudong New District
Shanghai, China 201206
Phone: +86 21 2080 6201