




## Modular Pressure Reducing Valves

(F3) DGX-06-\*\*-\*(\*)-60

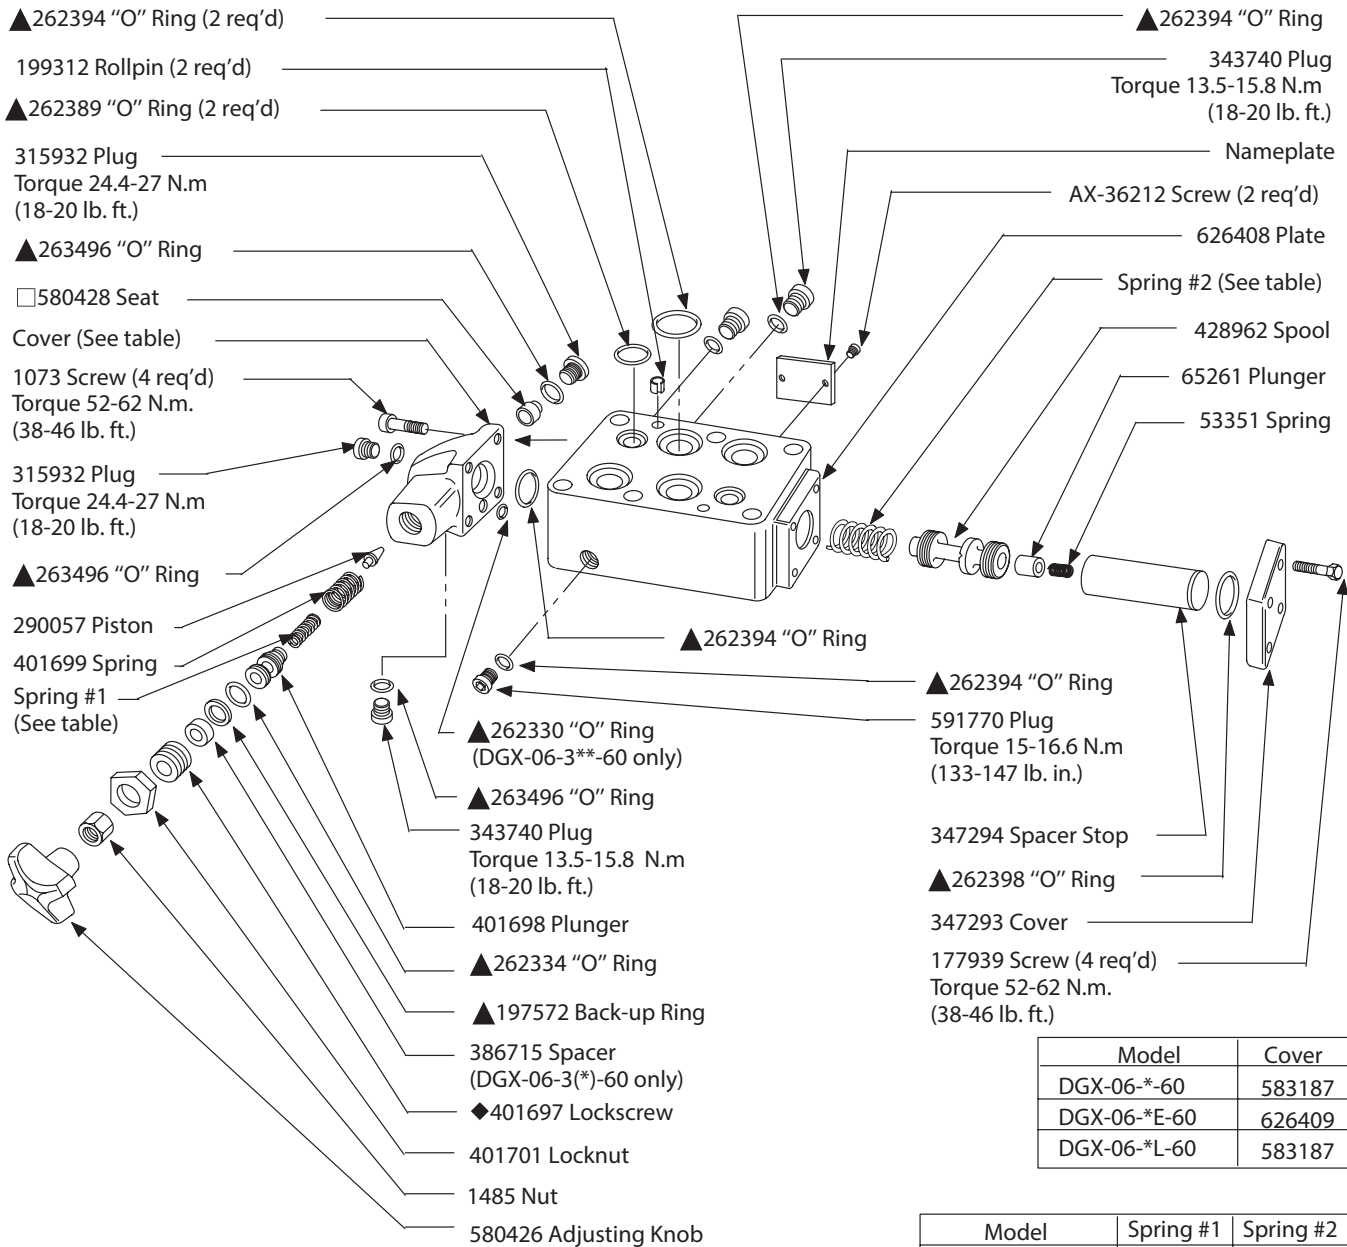

| Model          | Cover  |
|----------------|--------|
| DGX-06-**-60   | 583187 |
| DGX-06-**-E-60 | 626409 |
| DGX-06-**-L-60 | 583187 |

| Model           | Spring #1 | Spring #2 |
|-----------------|-----------|-----------|
| DGX-06-1**-60   | 2280      | —         |
| DGX-06-2**-60   | 583937    |           |
| DGX-06-3**-60   | 401700    |           |
| DGX-06-**-B*-60 | —         | 322653    |
| DGX-06-**-F*-60 |           | 348614    |



### CAUTION

This valve cannot be used with pressure centered valves.

◆ Assemble 401697 Lockscrew with stepped O.D. end toward 386715 Spacer or Plunger.


▲ Service all units with F3 Seal Kit 920126

### Note


Assemble seat in cover with crosshole pointing in direction of arrow. Coin piston to new seat.

# Model Code

(F3) DGX - 06 - \* \* (\*) - 60



|                                                                             |                                                                             |                                                                                                                  |
|-----------------------------------------------------------------------------|-----------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| <b>1</b> Seal Material                                                      | <b>4</b> Maximum Adjustable Pressure                                        | <b>6</b> Flow                                                                                                    |
| F3 - Seals for mineral oil and fire resistant fluids                        | 1 - 1000 PSI<br>2 - 2000 PSI<br>3 - 2850 PSI                                | Omitted - Standard external drain to "Y" port<br>E - External drain thru cover<br>L - Internal drain to "B" port |
| <b>2</b> Model Series                                                       | <b>5</b> USgpm Maximum Flow Capacity                                        | <b>7</b> Design                                                                                                  |
| Directional control, subplate or manifold mounted, pressure reducing module | B - 06-15 80 PSI min. adj. pressure<br>F - 06-30 200 PSI min. adj. pressure |                                                                                                                  |
| <b>3</b> Port Size                                                          |                                                                             |                                                                                                                  |
| 06 - 3/4 inch                                                               |                                                                             |                                                                                                                  |

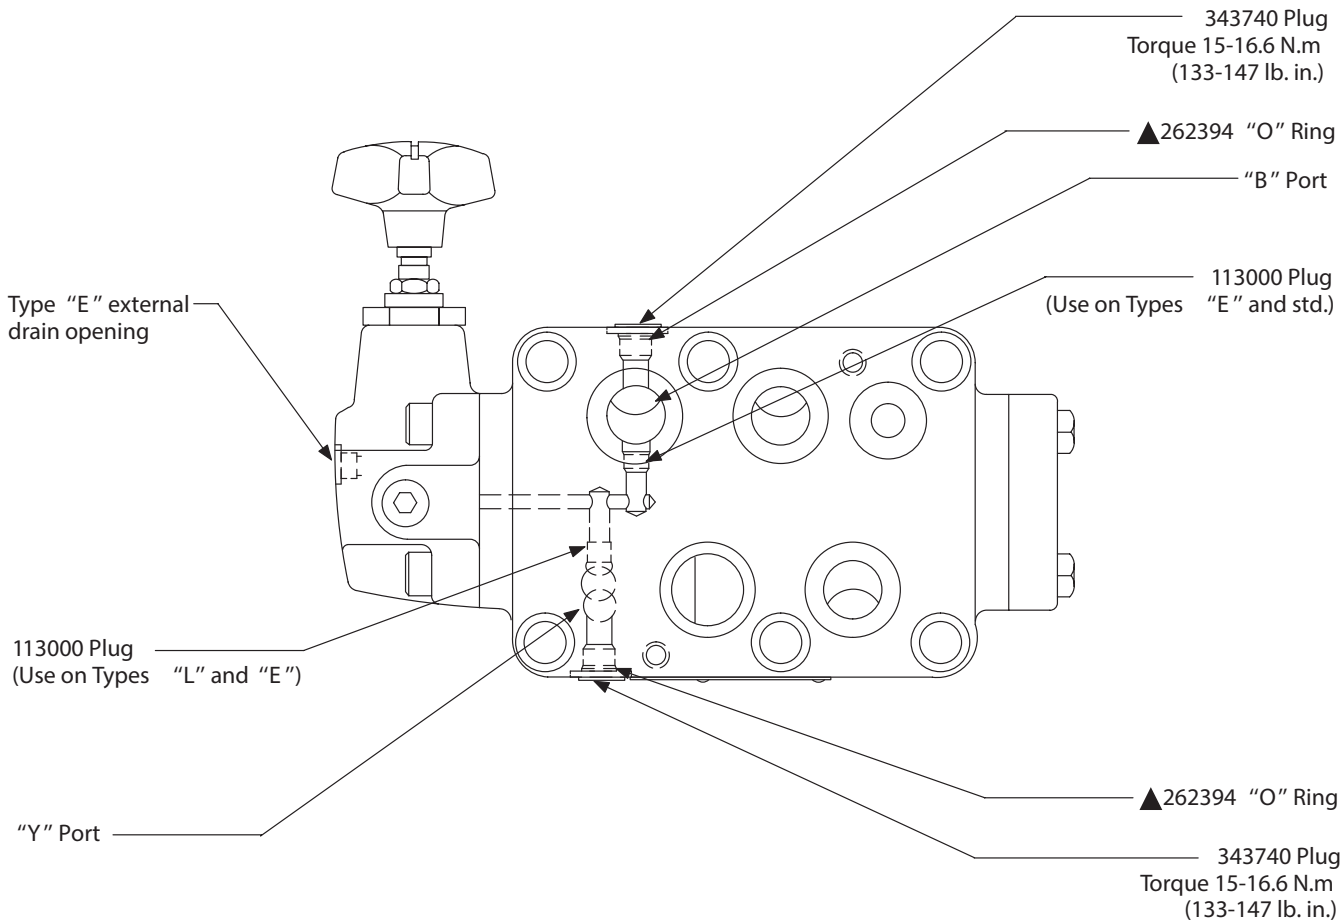

For satisfactory service life of these components, use full flow filtration to provide fluid which meets ISO cleanliness code 18/15 or cleaner. Selections from Danfoss OFF,OFRR and OFRS filter series are recommended.

**Products we offer:**

- Cartridge valves
- DCV directional control valves
- Electric converters
- Electric machines
- Electric motors
- Gear motors
- Gear pumps
- Hydraulic integrated circuits (HICs)
- Hydrostatic motors
- Hydrostatic pumps
- Orbital motors
- PLUS+1® controllers
- PLUS+1® displays
- PLUS+1® joysticks and pedals
- PLUS+1® operator interfaces
- PLUS+1® sensors
- PLUS+1® software
- PLUS+1® software services, support and training
- Position controls and sensors
- PVG proportional valves
- Steering components and systems
- Telematics

**Hydro-Gear**

[www.hydro-gear.com](http://www.hydro-gear.com)

**Daikin-Sauer-Danfoss**

[www.daikin-sauer-danfoss.com](http://www.daikin-sauer-danfoss.com)

**Danfoss Power Solutions** is a global manufacturer and supplier of high-quality hydraulic and electric components. We specialize in providing state-of-the-art technology and solutions that excel in the harsh operating conditions of the mobile off-highway market as well as the marine sector. Building on our extensive applications expertise, we work closely with you to ensure exceptional performance for a broad range of applications. We help you and other customers around the world speed up system development, reduce costs and bring vehicles and vessels to market faster.

Danfoss Power Solutions – your strongest partner in mobile hydraulics and mobile electrification.

**Go to [www.danfoss.com](http://www.danfoss.com) for further product information.**

We offer you expert worldwide support for ensuring the best possible solutions for outstanding performance. And with an extensive network of Global Service Partners, we also provide you with comprehensive global service for all of our components.

Local address:

**Danfoss  
Power Solutions (US) Company**  
2800 East 13th Street  
Ames, IA 50010, USA  
Phone: +1 515 239 6000

**Danfoss  
Power Solutions GmbH & Co. OHG**  
Krokamp 35  
D-24539 Neumünster, Germany  
Phone: +49 4321 871 0

**Danfoss  
Power Solutions ApS**  
Nordborgvej 81  
DK-6430 Nordborg, Denmark  
Phone: +45 7488 2222

**Danfoss  
Power Solutions Trading  
(Shanghai) Co., Ltd.**  
Building #22, No. 1000 Jin Hai Rd  
Jin Qiao, Pudong New District  
Shanghai, China 201206  
Phone: +86 21 2080 6201

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.