

Air Pilot Operated Directional Control Valve

DG18V-3-*A/B/F(L)-(P2)-(V)-*-60/61

DG18V-3-*C/N-(V)-*-60/61

Spool Type	Model	Spool
* O	A	617498
	B, C, F	617121
	N	890189
** 1, 11	B, C, F	458263
* 2	A	617120
	B, C, F	617118
	N	617126
**** 22	A	617122
*** 3, 31	B, C, F	617124
33	B, C, F	617123
* 6	A	890188
6	B, C, F	617119
	N	617341
**** 7	A	458151
7	B, C, F	617125
***** 8	B, C, F	02-111834

Spool Assembly Note

* Assemble type "OA", "2A", and "6A" spool in body with longer end land opposite of operator.

** Assemble type "1" spool in body with narrow center land towards "A" port.


Assemble type "11" spool in body with narrow center land towards "B" port.

*** Assemble type "3" spool in body with narrow center land towards "A" port.

Assemble type "31" spool in body with arrow center land towards "B" port.

**** Assemble type "7A" and "22A" spool in body with reduced longer end Dia. towards operator.

***** "V" Option, operator "A" is at port "A" end of valve and/or operator "B" is at port "B" end of valve, independent of spool type. Type 8 spool valves will always have a "V" present in model code.

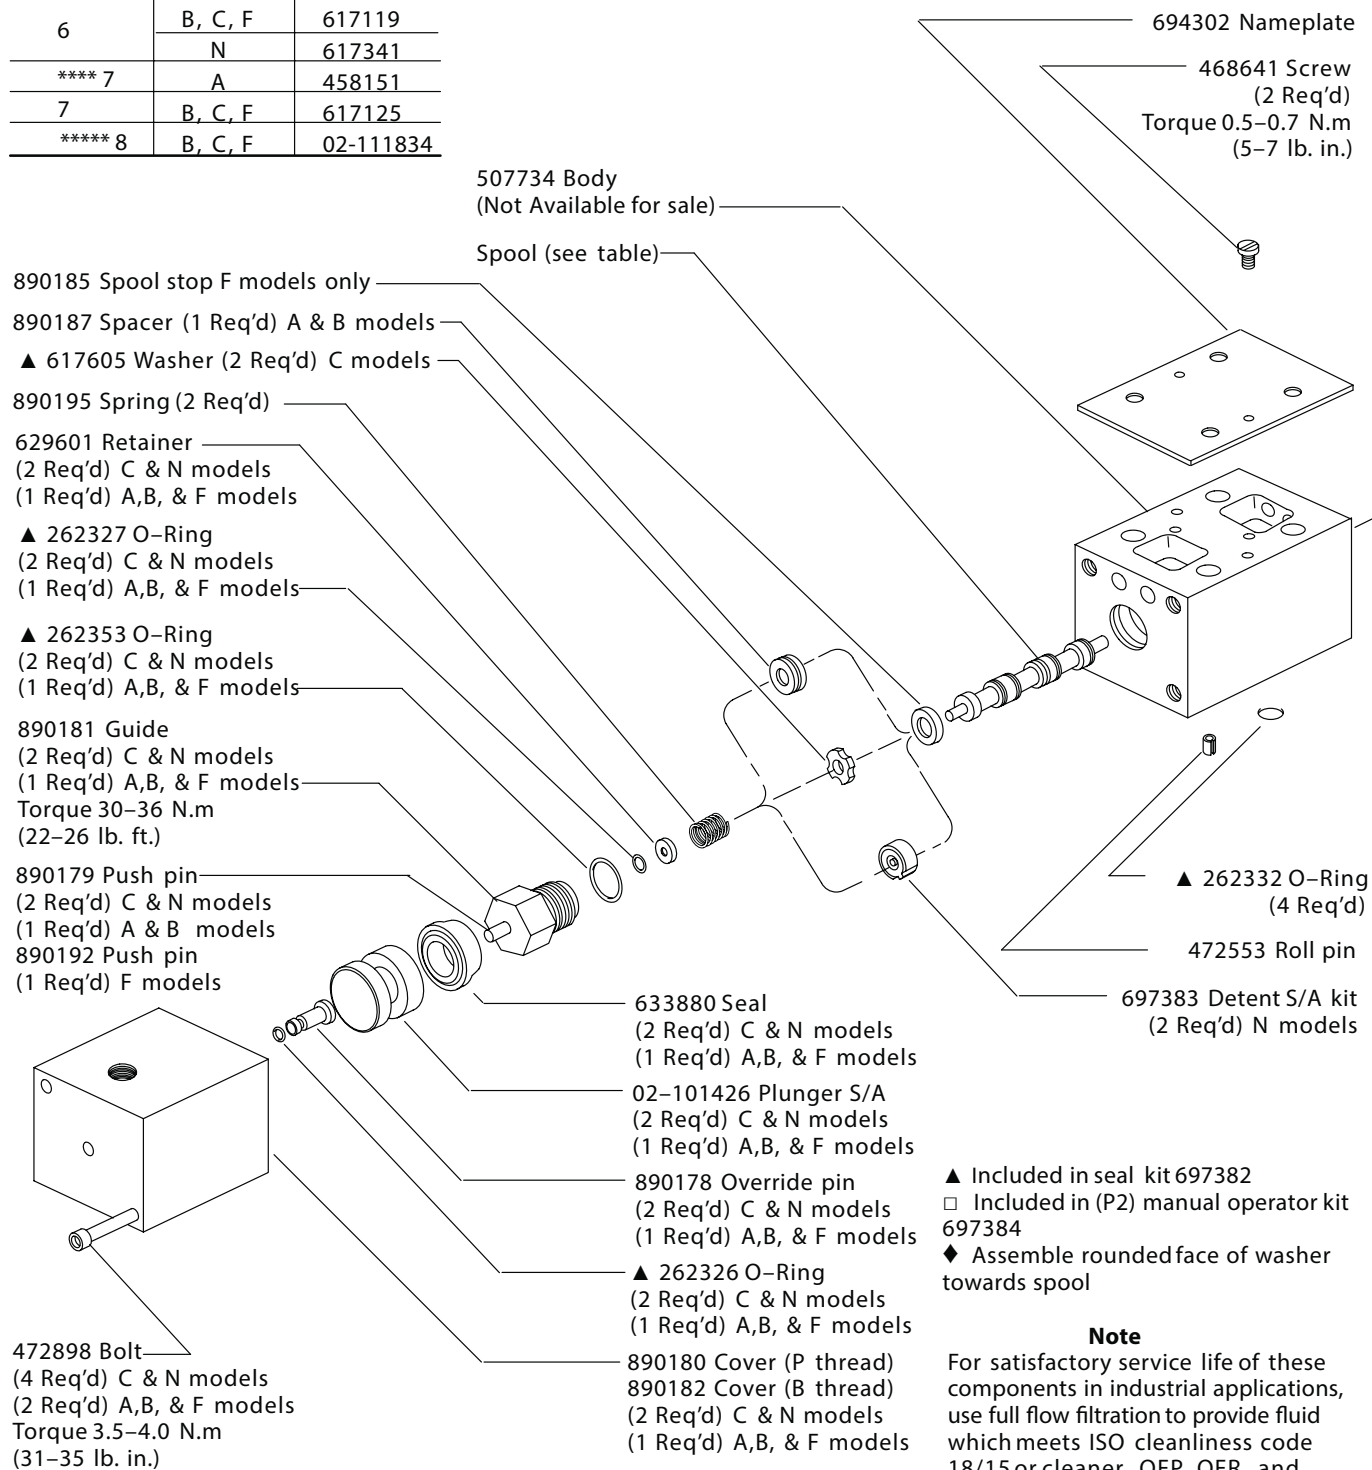

507724 End cap
Torque 30–36 N.m
(22–26 lb. ft.)

▲ 262353 O-Ring

890195 Spring (Ref.)

◆ 617605 Washer

DG18V-3-*A-60
Refer to opposite end for
balance of part numbers.

507724 End cap
Torque 30–36 N.m
(22–26 lb. ft.)

▲ 262353 O-Ring

890195 Spring (Ref.)

◆ 617605 Washer

DG18V-3-*B-60
Refer to opposite end for
balance of part numbers.

DG18V-3-*C-60
Refer to opposite end for
balance of part numbers

DG18V-3-*F-60
Refer to opposite end for
balance of part numbers.

507724 End cap
Torque 30–36 N.m
(22–26 lb. ft.)

▲ 262353 O-Ring

890195 Spring (Ref.)

◆ 617605 Washer

890186 Spacer

DG18V-3-*N-60
Refer to "C" layout
for part numbers

Valve Assembly Note


Right hand assembly shown for all single
operator models.

For left hand assembly, **DG18V3-*A-(P2)**,
all parts are reversed except body.

For left hand assembly, **DG18V3-*B-(P2)**
and **DG18V3-*F-(P2)**, all parts are
reversed except body and spool.

Model Code

DG 18 V - 3 - * * (L) - (P2) - (V) - * - 6*



1 Directional control valve, subplate mounted

2 Air pilot operated

3 Rated pressure

350 bar (5000 psi)

4 Interface

ISO 4401-03 (CETOP 3, NFPA D03)

5 Spool type (Center condition)

- 0 – Open center (All ports)
- 1 – Open center (P & A to T)
- 2 – Closed center (All ports)
- 3 – Closed center (P & B)
- 6 – Closed center (P only)
- 7 – Open center (T blocked)
- 8 – Tandem center (P to T)
- 11 – Open center (P & B to T)
- 22 – Closed center (Two-way)
- 31 – Closed center (P & A)
- 33 – Closed center (Bleed A & B)

6 Spool spring arrangement

- A – Spring offset to CYL. A, (Single operator)
- B – Spring centered, (Single operator)
- C – Spring centered (Dual operator)
- F – Spring offset, to CYL. A, shift to center (Single operator)
- N – No-spring, detented

7 Build type

- L – Left hand build (Single operator only)
- Blank – Standard right hand build (Single operator only)

8 Manual override option

- P2 – Manual operator in end cap, (single operators) (Applicable for A(L), B(L) & F(L) models only)
- Blank – Overrides in operator end only

9 Actuator identity


V – Actuator identifier included for all type 8 spools (Refer to spool assembly note)

10 Thread connection type


- P – 1/8" NPT threads
- B – 1/8 BSP threads

11 Design number

60
61

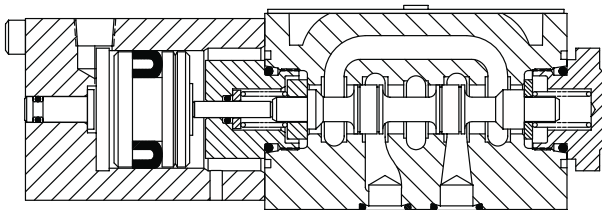


DG18V-3-*A-*-60/61 Typical spring offset valve / single operator

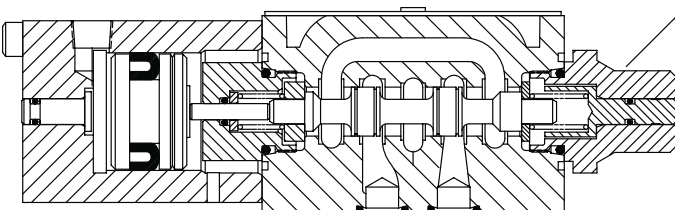

□ 507971 Plug & pin S/A
Torque 30–36 N.m (22–26 lb. ft.)

DG18V-3-*-P2-*-60/61 With manual operator in end cap / single operator

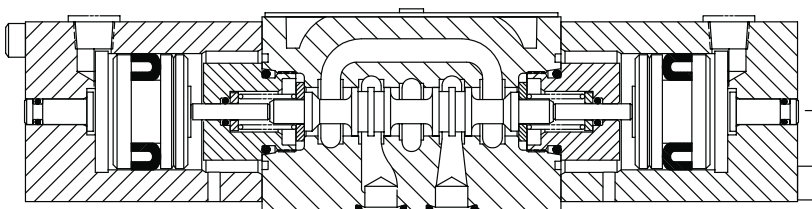

DG18V-3-*C-*-60/61 Typical spring centered valve / dual operator

Products we offer:

- Cartridge valves
- DCV directional control valves
- Electric converters
- Electric machines
- Electric motors
- Gear motors
- Gear pumps
- Hydraulic integrated circuits (HICs)
- Hydrostatic motors
- Hydrostatic pumps
- Orbital motors
- PLUS+1® controllers
- PLUS+1® displays
- PLUS+1® joysticks and pedals
- PLUS+1® operator interfaces
- PLUS+1® sensors
- PLUS+1® software
- PLUS+1® software services, support and training
- Position controls and sensors
- PVG proportional valves
- Steering components and systems
- Telematics

Danfoss Power Solutions is a global manufacturer and supplier of high-quality hydraulic and electric components. We specialize in providing state-of-the-art technology and solutions that excel in the harsh operating conditions of the mobile off-highway market as well as the marine sector. Building on our extensive applications expertise, we work closely with you to ensure exceptional performance for a broad range of applications. We help you and other customers around the world speed up system development, reduce costs and bring vehicles and vessels to market faster.

Danfoss Power Solutions – your strongest partner in mobile hydraulics and mobile electrification.

Go to www.danfoss.com for further product information.

We offer you expert worldwide support for ensuring the best possible solutions for outstanding performance. And with an extensive network of Global Service Partners, we also provide you with comprehensive global service for all of our components.

Local address:

Hydro-Gear

www.hydro-gear.com

Daikin-Sauer-Danfoss

www.daikin-sauer-danfoss.com

**Danfoss
Power Solutions (US) Company**
2800 East 13th Street
Ames, IA 50010, USA
Phone: +1 515 239 6000

**Danfoss
Power Solutions GmbH & Co. OHG**
Krokamp 35
D-24539 Neumünster, Germany
Phone: +49 4321 871 0

**Danfoss
Power Solutions ApS**
Nordborgvej 81
DK-6430 Nordborg, Denmark
Phone: +45 7488 2222

**Danfoss
Power Solutions Trading
(Shanghai) Co., Ltd.**
Building #22, No. 1000 Jin Hai Rd
Jin Qiao, Pudong New District
Shanghai, China 201206
Phone: +86 21 2080 6201