

Check Valves




Flange Mounted Unloading Valves

UPF2S/V-06/08/10/12-*-*-20

UPF2S-C-06/08/10/12-*-*-20 with Integral Check

UPF2S-(C)-06/08

CODE	■ SPRING	MAX. PRESSURE bar (psi)
A	849639	70 (1000)
B	762928	125 (1800)
F	762929	207 (3000)
G	762930	275 (4000)

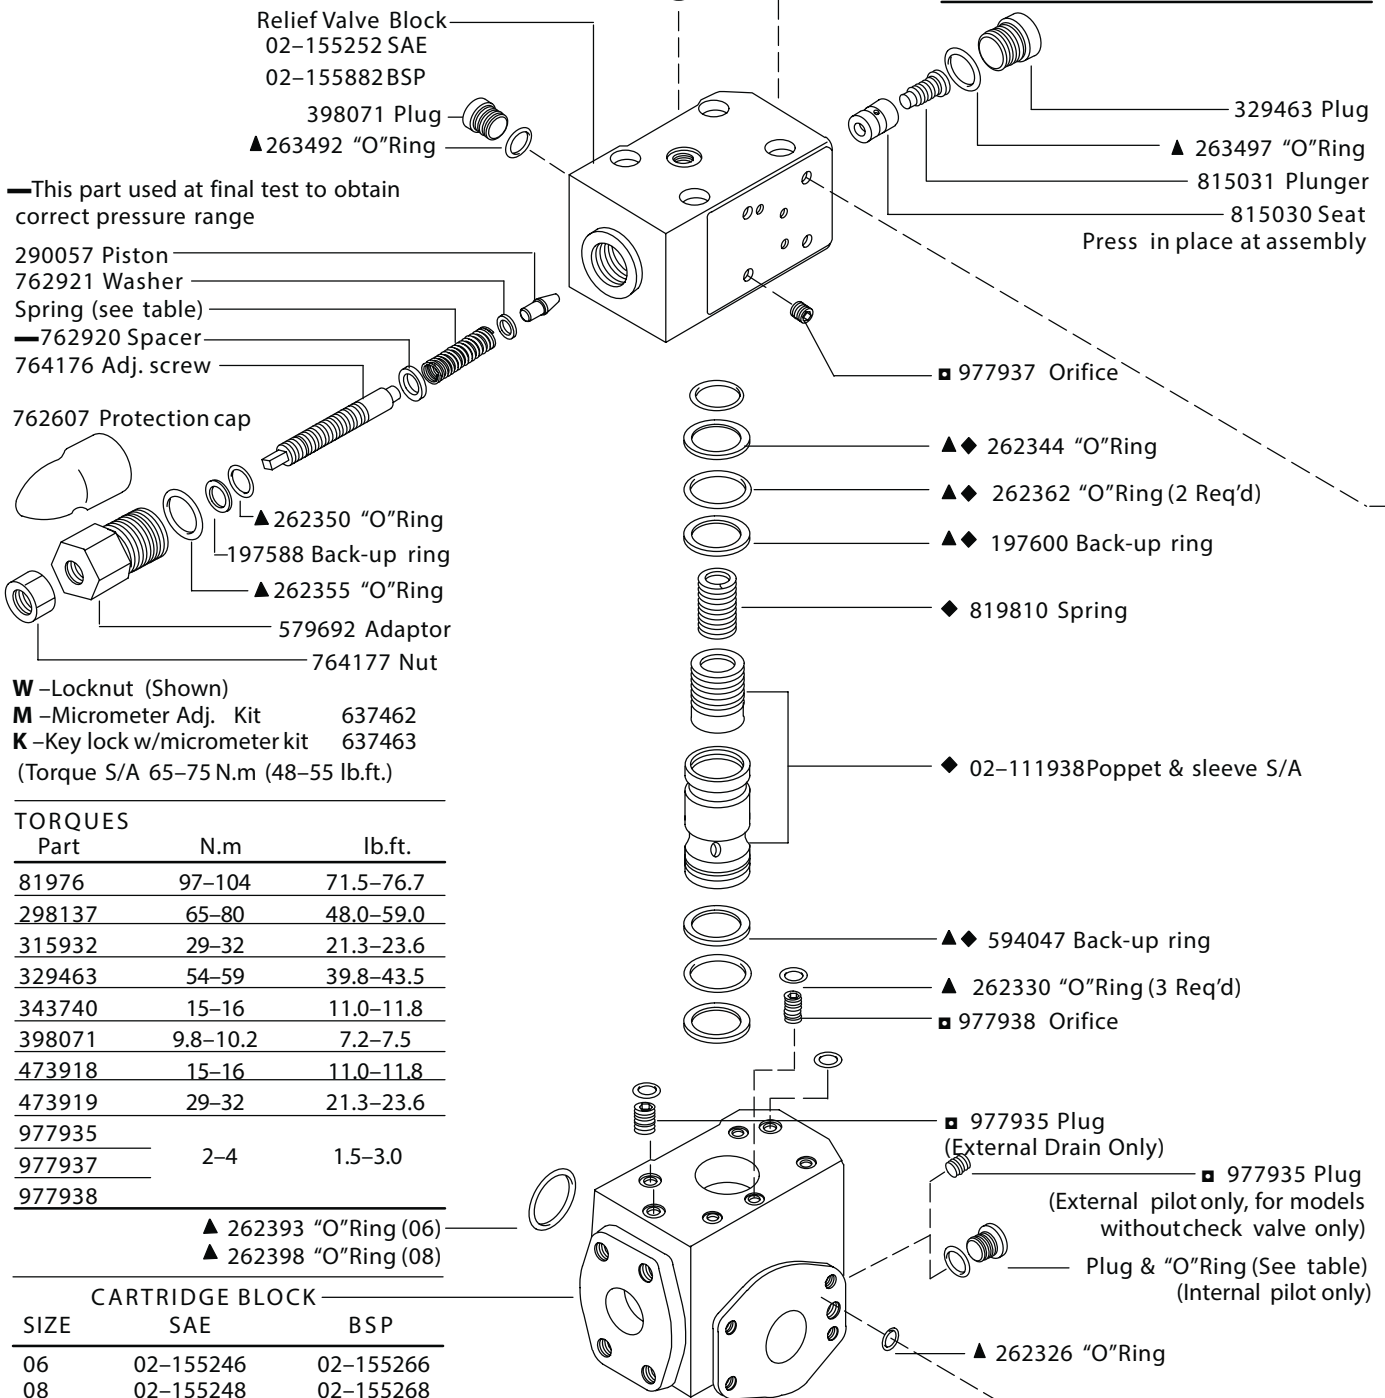

— This part used at final test to obtain correct pressure range

290057 Piston
762921 Washer
Spring (see table)
— 762920 Spacer
764176 Adj. screw
762607 Protection cap
▲ 262350 "O"Ring
▲ 197588 Back-up ring
▲ 262355 "O"Ring
579692 Adaptor
764177 Nut

W – Locknut (Shown)
M – Micrometer Adj. Kit 637462
K – Key lock w/micrometer kit 637463
(Torque S/A 65–75 N.m (48–55 lb.ft.))

TORQUES		
Part	N.m	lb.ft.
81976	97–104	71.5–76.7
298137	65–80	48.0–59.0
315932	29–32	21.3–23.6
329463	54–59	39.8–43.5
343740	15–16	11.0–11.8
398071	9.8–10.2	7.2–7.5
473918	15–16	11.0–11.8
473919	29–32	21.3–23.6
977935		
977937	2–4	1.5–3.0
977938		

▲ 262393 "O"Ring (06)
▲ 262398 "O"Ring (08)

CARTRIDGE BLOCK		
SIZE	SAE	BSP
06	02-155246	02-155266
08	02-155248	02-155268


▲ Included In Seal Kit 02-301170 (SAE)
● Included In Seal Kit 02-301171 (BSP)
◆ Included In Cartridge S/A
■ Included In Press. Adj. S/A

■ Bond in place with Loctite 222 or equivalent

Parts prefixed with symbols available only in kits.

Relief Valve Block Plug & "O"Ring (Internal Drain Only)		
	SAE	BSP
Plug	343740	473918
"O"Ring	▲ 263494	● 781938

	SAE	BSP
PLUG	315932	473919
"O"RING	▲ 263496	● 704766

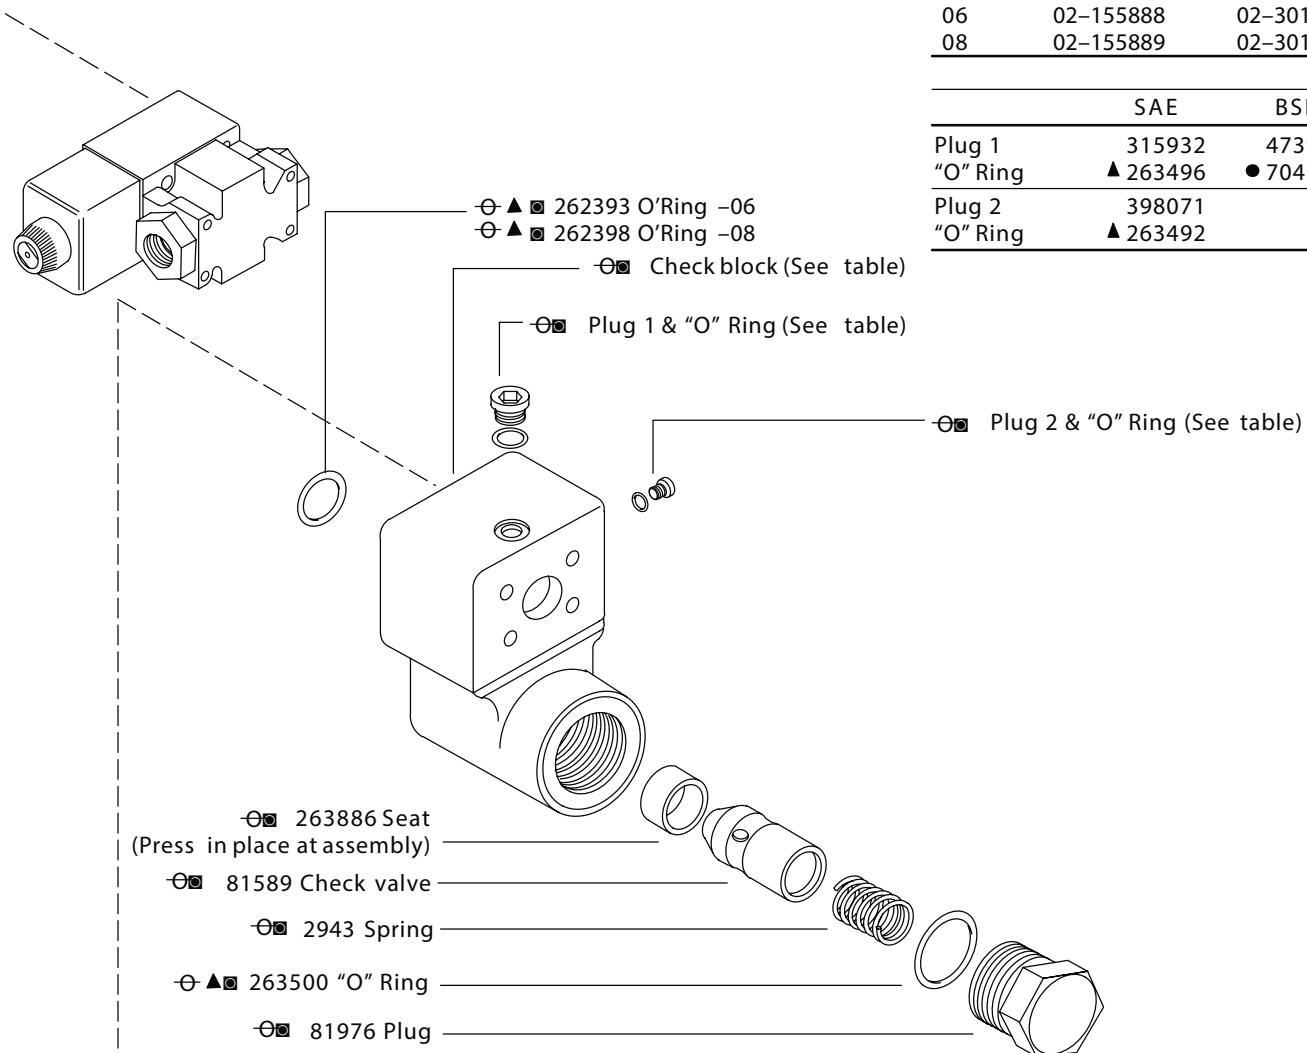

SIZE	CHECK BLOCK	
	SAE	BSP
06	02-155888	02-301071
08	02-155889	02-301072

	SAE	BSP
Plug 1	315932	473919
"O" Ring	▲ 263496	● 704766
Plug 2	398071	
"O" Ring	▲ 263492	


■ These parts omitted for models without
 "C" check valves.

- CHECK BLOCK S/A
 (Includes all parts shown
 plus shipping parts)

SIZE	SAE	BSP
06	02-304025	02-304026
08	02-304027	02-304028

UPF2S-(C)-10/12

CODE	■ SPRING	MAX. PRESSURE bar (psi)
A	849639	70 (1000)
B	762928	125 (1800)
F	762929	207 (3000)
G	762930	275 (4000)

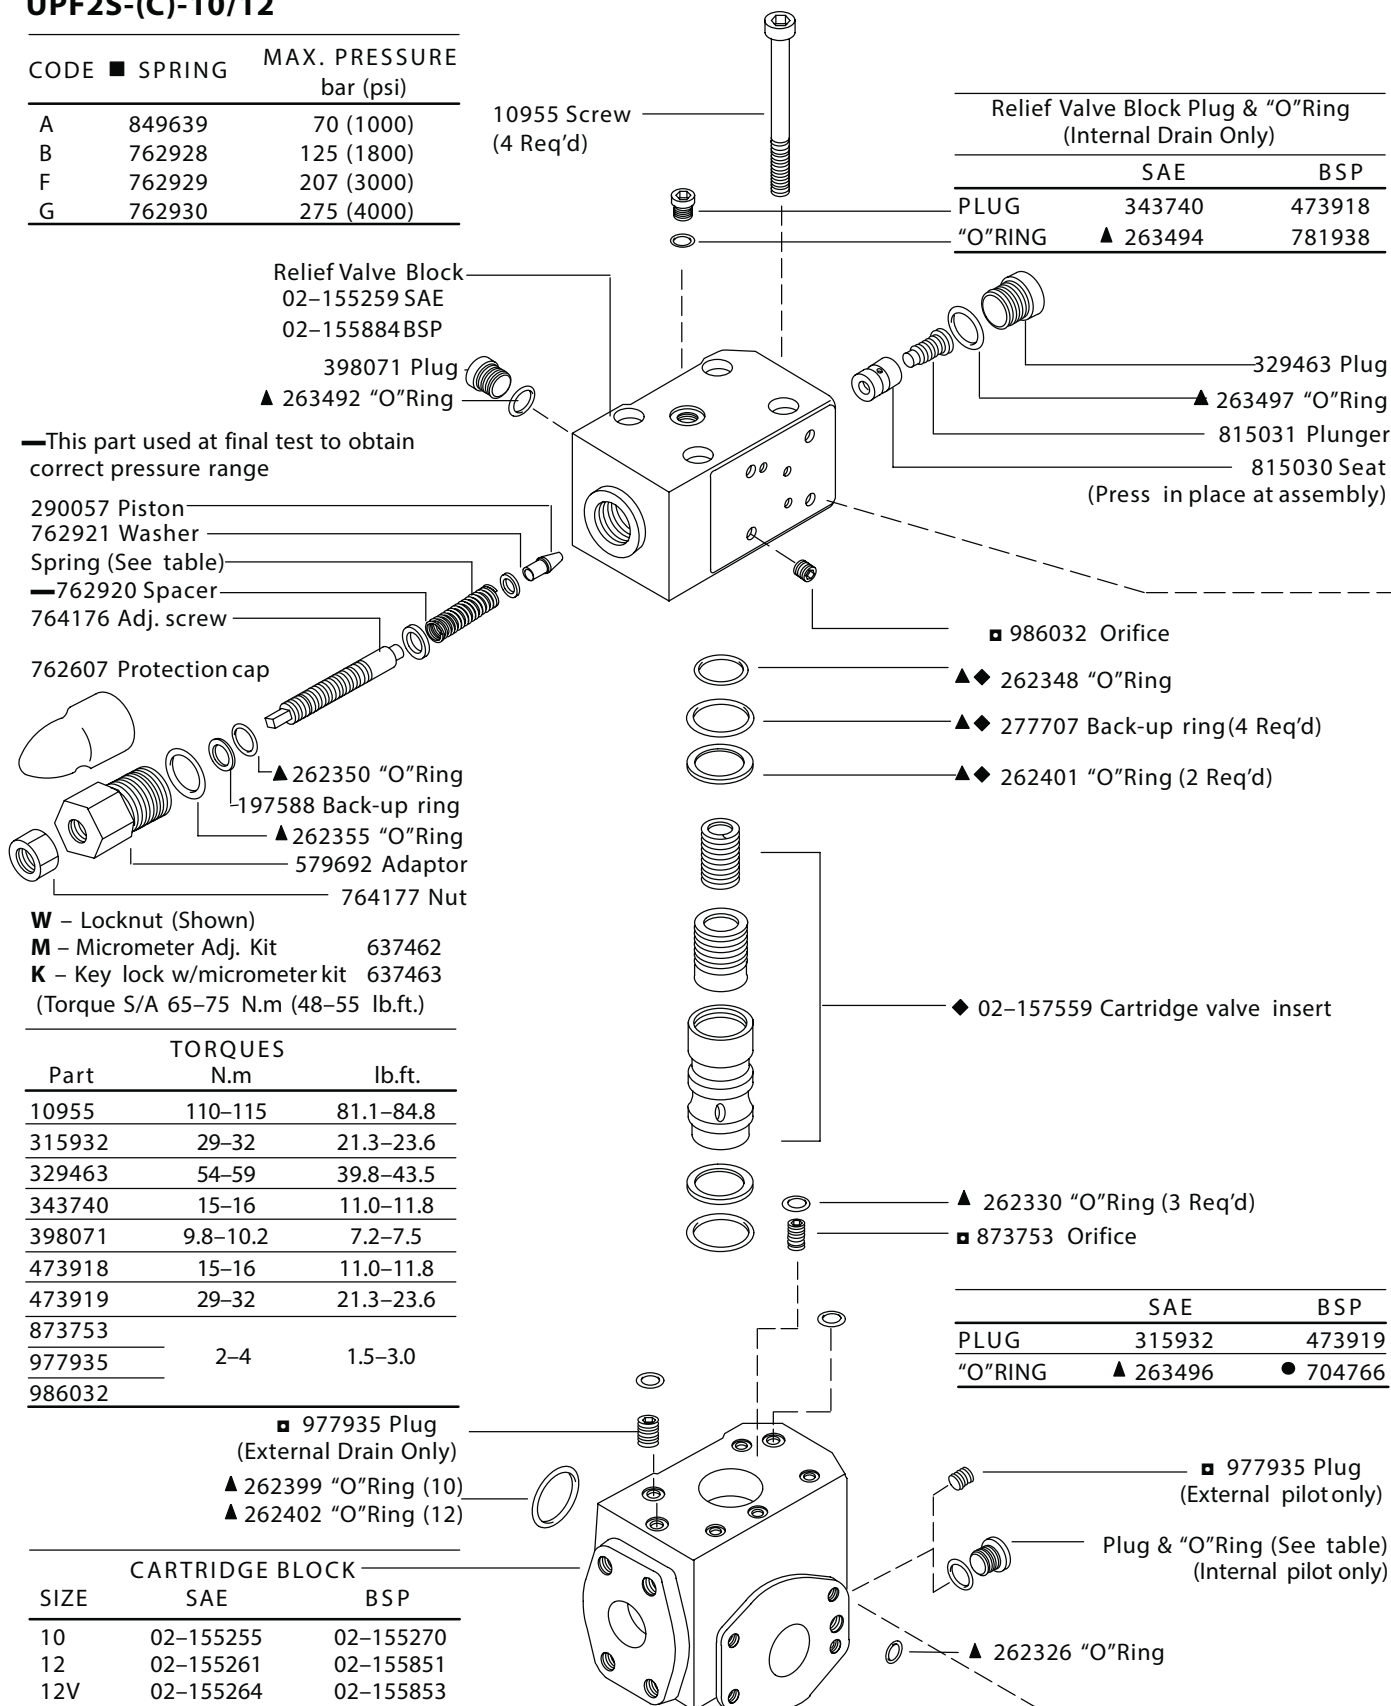

Relief Valve Block Plug & "O"Ring (Internal Drain Only)		
	SAE	BSP
PLUG	343740	473918
"O"RING	▲ 263494	781938

— This part used at final test to obtain correct pressure range

290057 Piston
762921 Washer
Spring (See table)
— 762920 Spacer
764176 Adj. screw

762607 Protection cap

W – Locknut (Shown)
M – Micrometer Adj. Kit 637462
K – Key lock w/micrometer kit 637463
(Torque S/A 65–75 N.m (48–55 lb.ft.))


TORQUES		
Part	N.m	lb.ft.
10955	110–115	81.1–84.8
315932	29–32	21.3–23.6
329463	54–59	39.8–43.5
343740	15–16	11.0–11.8
398071	9.8–10.2	7.2–7.5
473918	15–16	11.0–11.8
473919	29–32	21.3–23.6
873753		
977935	2–4	1.5–3.0
986032		

	SAE	BSP
PLUG	315932	473919
"O"RING	▲ 263496	● 704766

CARTRIDGE BLOCK		
SIZE	SAE	BSP
10	02-155255	02-155270
12	02-155261	02-155851
12V	02-155264	02-155853


▲ Included In Sear Kit 02-301172 (SAE)
● Included In Sear Kit 02-301173 (BSP)
◆ Included In Cartridge S/A
■ Included In Press. Adj. S/A
■ Bond in place with Loctite 222 or equivalent
Parts prefixed with symbols
available only in kits.

■ These parts omitted for models without "C" check valves.



SIZE	CHECK BLOCK	
	SAE	BSP
10	02-155890	02-301073
12	02-155891	02-301074

	SAE	BSP
Plug 1	315932	473919
"O"Ring	▲ 263496	● 704766
Plug 2	398071	—
"O"Ring	▲ 262492	—

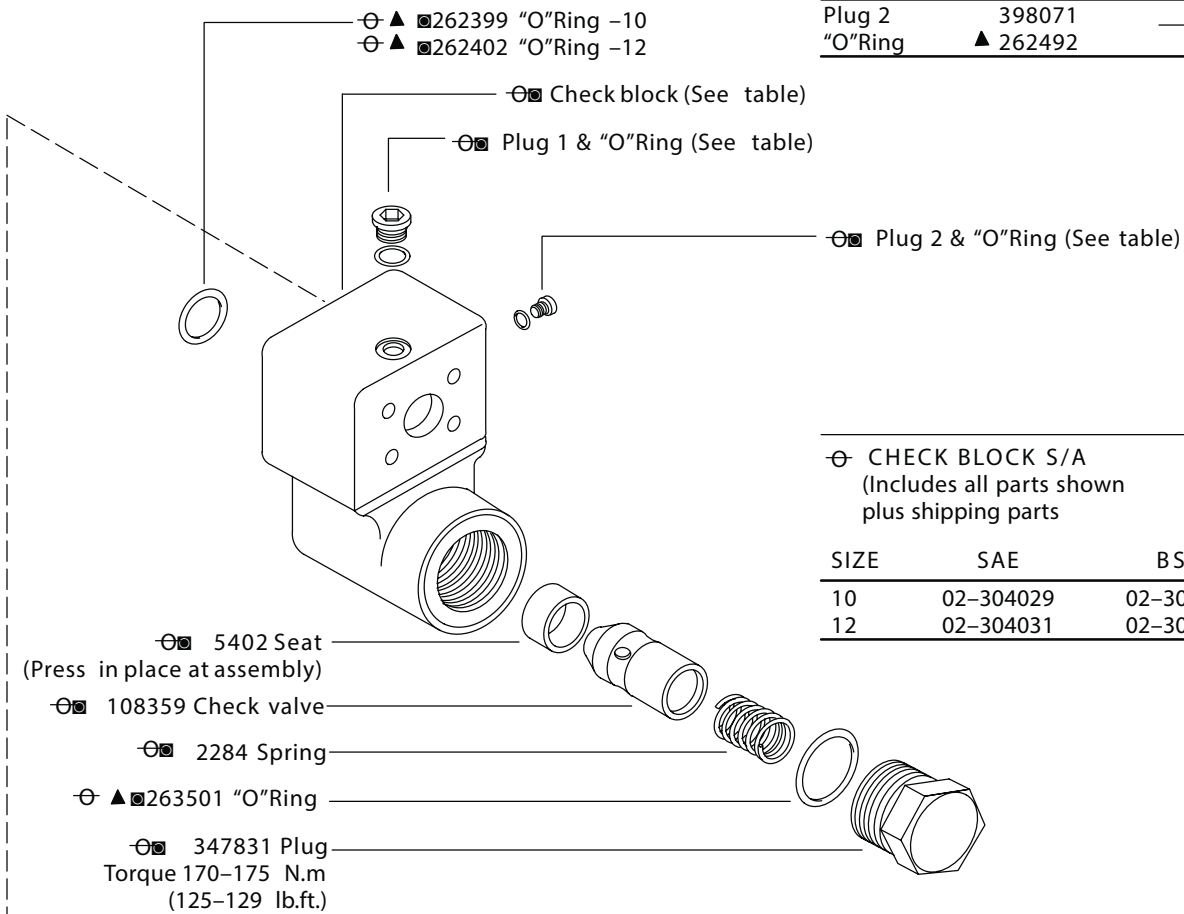

⊖ CHECK BLOCK S/A
(Includes all parts shown
plus shipping parts)

SIZE	SAE	BSP
10	02-304029	02-304030
12	02-304031	02-304032

UPF2 *- (C) - 06 - * - * - (B) - (P) - (1) - 3(S) - (*) - (V) M - (S*) - *** (L) - * * - 20

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----

1 Valve Function

U - Unloading valve

2 Mounting Type

PF - Pump flange mounting

3 Unit type

2 - Single pressure with vent

4 Flange Type

S - SAE J518C 4-bolt flange standard series code 61 (All sizes)

V - SAE J518C 4-bolt high pressure code 62 (12 size only)

5 Integral Check Valve

(5 psi cracking pressure only)

Blank - Without integral check

C - With integral check. Not available with UPF2V-12.

6 Valve Size

06 - 3/4 inch

08 - 1 inch

10 - 1 1/4 inch

12 - 1 1/2 inch

7 Maximum Pressure Adjustment

A - 69 bar (1000 psi)

B - 124 bar (1800 psi)

F - 245 bar (3550 psi)

G - 275 bar (4000 psi)

350 bar (5000 psi) - (UPF2V-12 models only)

8 Control Type

W - Screw adjust with locknut

K - Micrometer adjust with keylock

M - Micrometer adjust w/o keylock

9 Thread Type (remote control/vent connection)

Blank - SAE-6 O-ring boss port (.5625-18 UNF-2B thd.)

B - BSP-G 1/4 (1/4" BSPF)

10 Remote Pilot

Blank - Internal pilot

P - External pilot (For models with check valve only)

11 Remote Drain

Blank - Internal drain

1 - External drain

12 Vent Valve

3 - Standard performance

3S - High performance

Uses 22A type spool/spring arrangement. Other features are optional. Refer to I-3886-S for parts breakdown.

13 Manual Override Options

14 Solenoid Energization Identification

15 Electrical Options Flag

16 Spool Position Monitoring Switch

17 Solenoid Type/Electrical Connections

18 Indicator Lights

19 Coil Identification

20 Tank Rating Pressure

2 - 10 bar (145 psi) for spool position indicator models.

5 - 100 bar (1450 psi) for standard performance models, DG4V-3(S), with AC or DC solenoids.

6 - 210 bar (3045 psi) for high performance models, DG4V-3, with AC solenoids.

7 - 210 bar (3045 psi) for high performance models, DG4V-3 with DC solenoids.

21 Design Number, 20 series

Products we offer:

- Cartridge valves
- DCV directional control valves
- Electric converters
- Electric machines
- Electric motors
- Gear motors
- Gear pumps
- Hydraulic integrated circuits (HICs)
- Hydrostatic motors
- Hydrostatic pumps
- Orbital motors
- PLUS+1® controllers
- PLUS+1® displays
- PLUS+1® joysticks and pedals
- PLUS+1® operator interfaces
- PLUS+1® sensors
- PLUS+1® software
- PLUS+1® software services, support and training
- Position controls and sensors
- PVG proportional valves
- Steering components and systems
- Telematics

Danfoss Power Solutions is a global manufacturer and supplier of high-quality hydraulic and electric components. We specialize in providing state-of-the-art technology and solutions that excel in the harsh operating conditions of the mobile off-highway market as well as the marine sector. Building on our extensive applications expertise, we work closely with you to ensure exceptional performance for a broad range of applications. We help you and other customers around the world speed up system development, reduce costs and bring vehicles and vessels to market faster.

Danfoss Power Solutions – your strongest partner in mobile hydraulics and mobile electrification.

Go to www.danfoss.com for further product information.

We offer you expert worldwide support for ensuring the best possible solutions for outstanding performance. And with an extensive network of Global Service Partners, we also provide you with comprehensive global service for all of our components.

Local address:

Hydro-Gear

www.hydro-gear.com

Daikin-Sauer-Danfoss

www.daikin-sauer-danfoss.com

**Danfoss
Power Solutions (US) Company**
2800 East 13th Street
Ames, IA 50010, USA
Phone: +1 515 239 6000

**Danfoss
Power Solutions GmbH & Co. OHG**
Krokamp 35
D-24539 Neumünster, Germany
Phone: +49 4321 871 0

**Danfoss
Power Solutions ApS**
Nordborgvej 81
DK-6430 Nordborg, Denmark
Phone: +45 7488 2222

**Danfoss
Power Solutions Trading
(Shanghai) Co., Ltd.**
Building #22, No. 1000 Jin Hai Rd
Jin Qiao, Pudong New District
Shanghai, China 201206
Phone: +86 21 2080 6201