


Pressure Centered Pilot Operated Directional Control Valves

DG3S-8-*D*-*-10

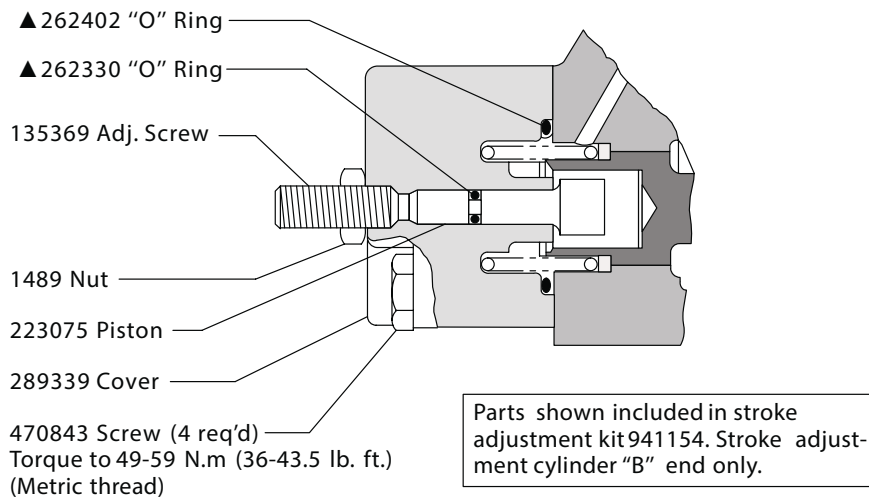



Cover Attaching Bolts	
Model	Bolt Kit
W/out Pilot Choke	466834
W/Pilot Choke	466836
Torque to 4.5-5.7 N.m (39.8-50.4 lb. in.)	
Bolt Kit includes 4 screws	

Model	Spool	I.D. Plate with Circuit Diagram
DG3S-8-0D*-*-10	363495	400967
DG3S-8-1D*-*-10	*276623	400968
DG3S-8-2D*-*-10	363496	400969
DG3S-8-3D*-*-10	*276625	400970
DG3S-8-4D*-*-10	276626	400971
DG3S-8-6D*-*-10	363498	400972
DG3S-8-8D*-*-10	363499	400971
DG3S-8-9D*-*-10	363500	400967
DG3S-8-33D*-*-10	363501	400972

■ Plug Torques		
Plug	Torque (N.m)	Torque (lb. in.)
343740	10.0-11.8	90-105
398071	3.4-4.0	30-35
407533		


***Note**
Assemble Type 1 and 3 spools with narrow center land toward "A" end of valve. "A" end of valve is defined as being closest to cylinder port "A".

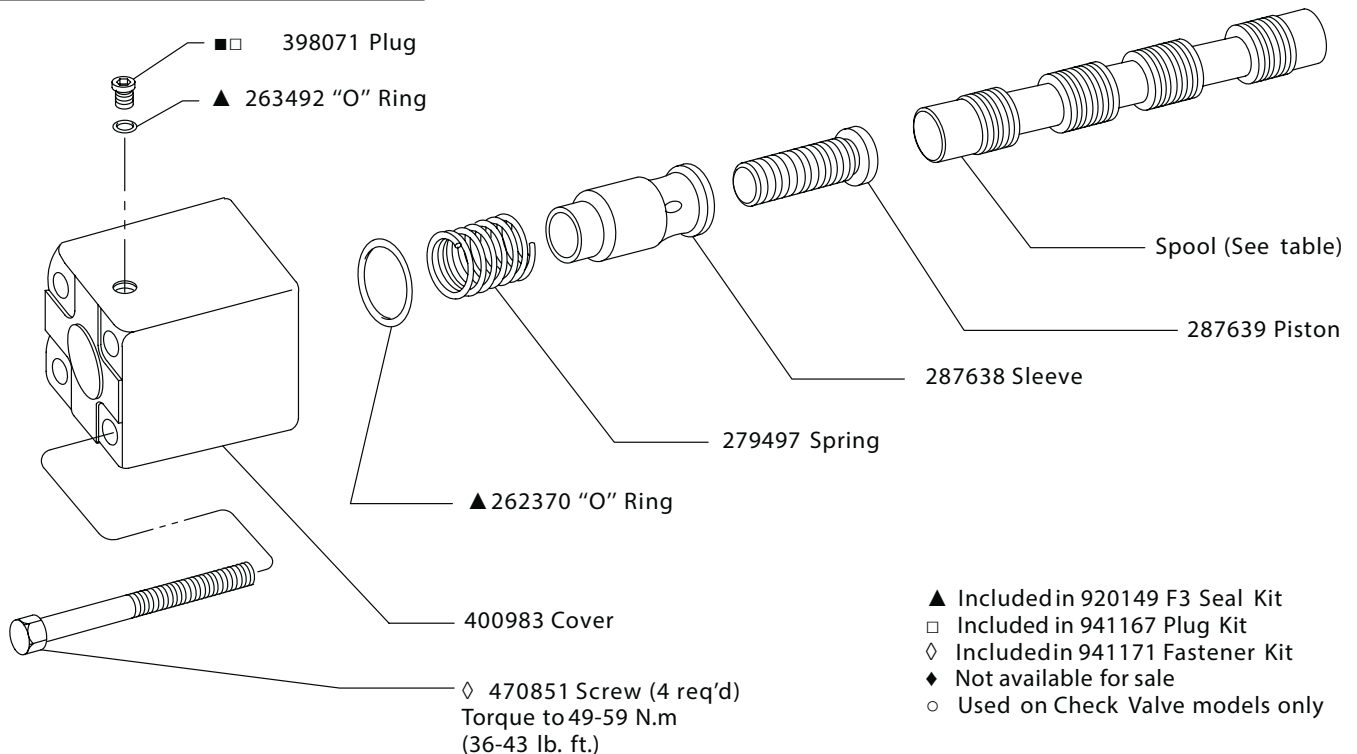

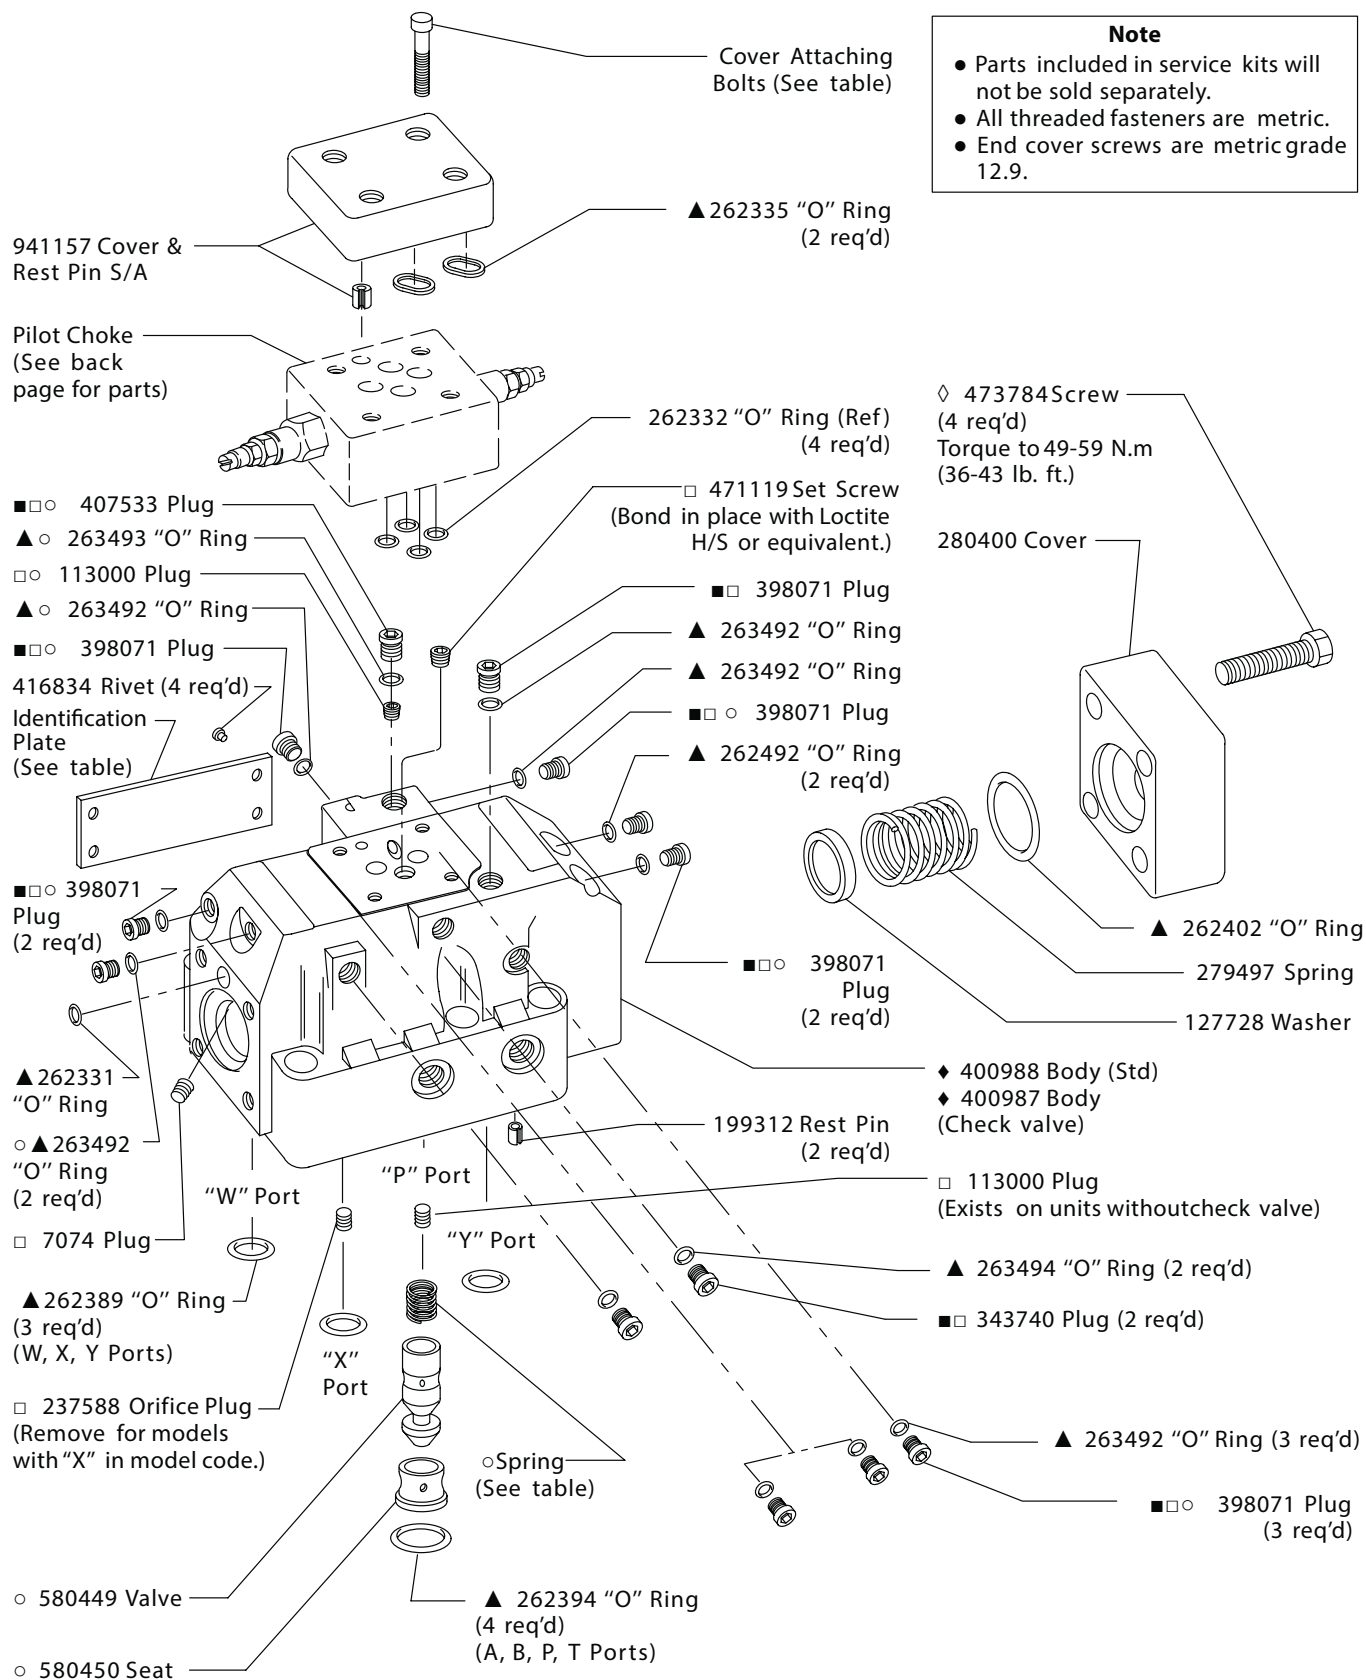


Model	Spring	Color
DG3S-8-*D*-*-K-10	398130	—
DG3S-8-*D*-*-R-10	398131	Yellow
DG3S-8-*D*-*-S-10	398132	Red

Pilot Choke DGMFN - 3 - Y - A2W - B2W - 21

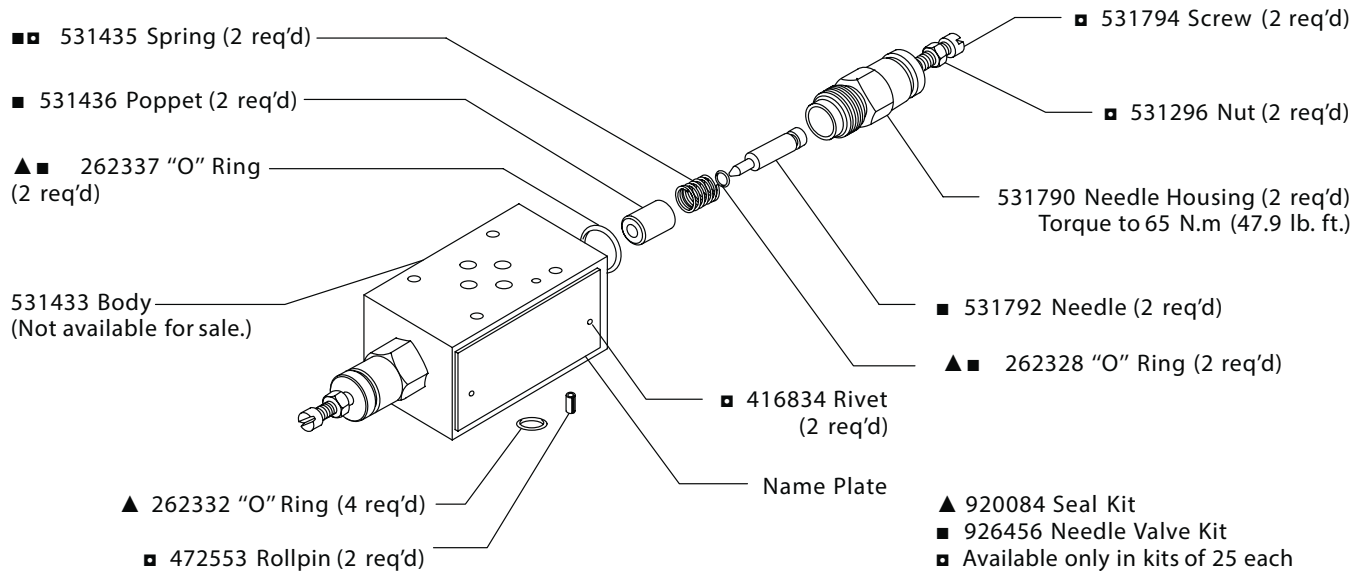

Model Code

(F3) DG3S - 8- * D *- * - * -10



1 Special Seals

F3 - Seals for mineral oil or fire resistant fluid

2 Directional Control Valve

DG3S - Subplate mounting, pilot operated. Pressure rating 210 bar (3000 PSI)

3 Valve Size

8 - Valve size CETOP 8

4 Spool Type

5 Valve Type

D - Pressure Centered

6 Fast Response

X -Fast response (Omit for standard models.)

7 Spool Control Modification

(Omit if not required.)

2 - Pilot Choke

8 - Stroke adjustment - Cylinder 'B' end only

2-8 - If both are required

8 Check Valve in Pressure Port

K - 0,35 bar (5 psi)

R - 3,45 bar (50 psi)

S - 5,2 bar (75 psi)

9 Design

For satisfactory service life of these components, use full flow filtration to provide fluid which meets ISO cleanliness code 18/15 or cleaner. Selections from pressure, return, and in-line filter series are recommended.

Products we offer:

- Cartridge valves
- DCV directional control valves
- Electric converters
- Electric machines
- Electric motors
- Gear motors
- Gear pumps
- Hydraulic integrated circuits (HICs)
- Hydrostatic motors
- Hydrostatic pumps
- Orbital motors
- PLUS+1® controllers
- PLUS+1® displays
- PLUS+1® joysticks and pedals
- PLUS+1® operator interfaces
- PLUS+1® sensors
- PLUS+1® software
- PLUS+1® software services, support and training
- Position controls and sensors
- PVG proportional valves
- Steering components and systems
- Telematics

Danfoss Power Solutions is a global manufacturer and supplier of high-quality hydraulic and electric components. We specialize in providing state-of-the-art technology and solutions that excel in the harsh operating conditions of the mobile off-highway market as well as the marine sector. Building on our extensive applications expertise, we work closely with you to ensure exceptional performance for a broad range of applications. We help you and other customers around the world speed up system development, reduce costs and bring vehicles and vessels to market faster.

Danfoss Power Solutions – your strongest partner in mobile hydraulics and mobile electrification.

Go to www.danfoss.com for further product information.

We offer you expert worldwide support for ensuring the best possible solutions for outstanding performance. And with an extensive network of Global Service Partners, we also provide you with comprehensive global service for all of our components.

Local address:

Hydro-Gear

www.hydro-gear.com

Daikin-Sauer-Danfoss

www.daikin-sauer-danfoss.com

**Danfoss
Power Solutions (US) Company**
2800 East 13th Street
Ames, IA 50010, USA
Phone: +1 515 239 6000

**Danfoss
Power Solutions GmbH & Co. OHG**
Krokamp 35
D-24539 Neumünster, Germany
Phone: +49 4321 871 0

**Danfoss
Power Solutions ApS**
Nordborgvej 81
DK-6430 Nordborg, Denmark
Phone: +45 7488 2222

**Danfoss
Power Solutions Trading
(Shanghai) Co., Ltd.**
Building #22, No. 1000 Jin Hai Rd
Jin Qiao, Pudong New District
Shanghai, China 201206
Phone: +86 21 2080 6201