

Wet Armature Pilot Operated Directional Valves

DG5S4—10*D—*—*—*—*—*—*—80

MODEL	SPOOL	ID PLATE
DG5S4-100D-	364037	400967
DG5S4-101D-	*331404	400968
DG5S4-102D-	364038	400969
DG5S4-103D-	*277479	400970
DG5S4-104D-	281193	400971
DG5S4-106D-	364039	400972
DG5S4-108D-	364041	400971
DG5S4-109D-	277563	400967
DG5S4-1033D	364042	400972

* Assemble type 1 & 3 spools with narrow center land towards "A" end of valve. "A" end is defined as being closest to cylinder port "A".

PLUG INSTALLATION TABLE		
MODEL	PLUG "A"	PLUG "B"
-10*D	226987	OUT
-10*D-E	7074	226987
-10*DA	30560	OUT
-10*DA-E	7074	30560
-10*DAX	OUT	OUT
-10*DAX-E	7074	
-10*DB	224026	
-10*DB-E	7074	224026

PLUG TORQUES (OILED)		
PLUG	N.M	lb. in.
7074	8.5-9.6	75-85
30560	8.5-9.6	75-85
224026	8.5-9.6	75-85
226987	8.5-9.6	75-85
343740	10.0-11.8	90-105
363889	16.9-18.0	150-160
407533	3.4-4.0	30-35

NOTE

Parts included in service kits are not sold separately.


- ▲ Included in F3 Seal Kit 920213
- ◇ Included in Fastener Kit 941262
- Included in Pilot Bolt Kit 255633
- Included in Pilot Bolt Kit 255654
- Included in Plug Kit 941263
- ◆ Not Available For Sale

Seal Kit Note

The -80 design valves are manufactured as shown with F3 seals used internally. Interface seals are standard Nitrile material and are converted to F3 in the seal kit. All seals in the seal kit are F3.

NOTE

For satisfactory service life of these components in industrial applications, use full flow filtration to provide fluid which meets ISO cleanliness code 18/15 or cleaner.

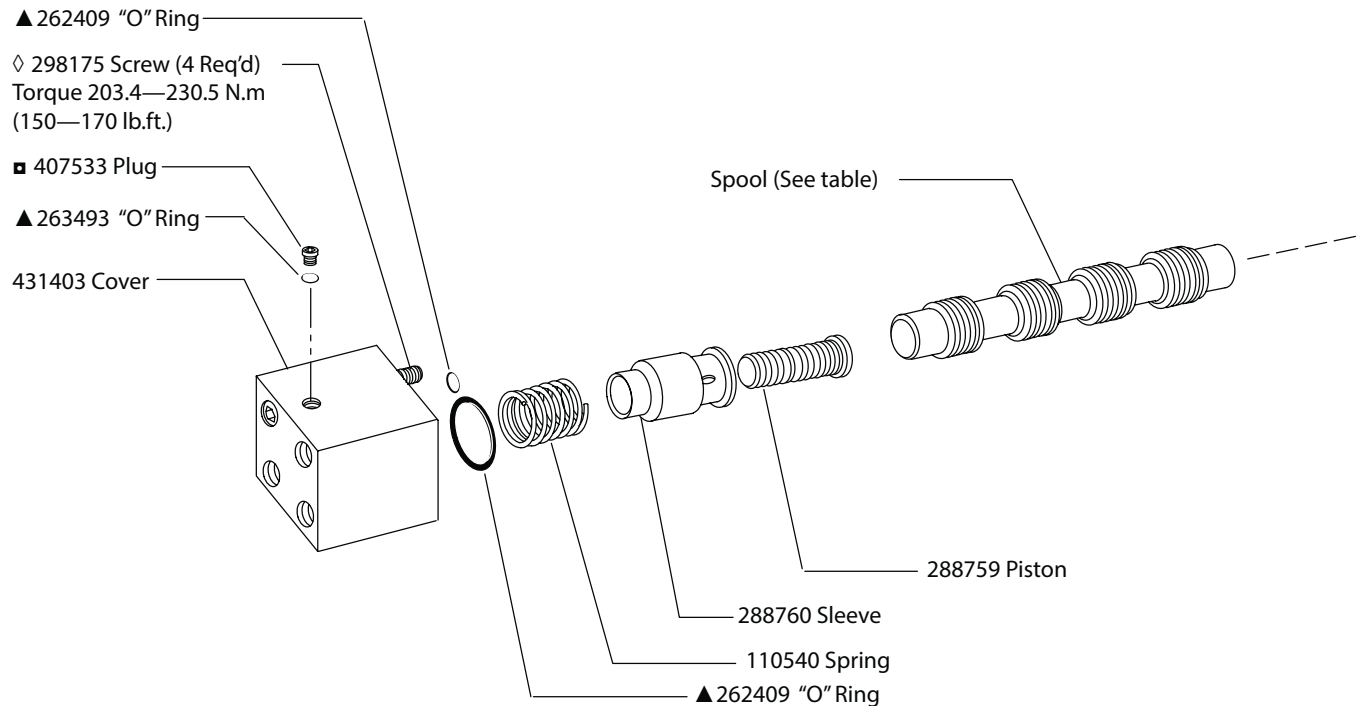

Model Code

(F3) P* D G 5 S 4 * - 10 * D * - * - * - * - * - 80 - (LH)

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

1

Special Seals

2

Electrical Options

(Omit if not required)

PA - Insta plug valve with plug only

PB - Insta plug valve with plug & receptacle

3

Directional Control Valve

4

Manifold or Subplate Mounted

5

Solenoid Controlled Pilot Operated

6

Sliding Spool

7

Flow Direction

4 - 4 Way

8

Electrical Accessories

L - Solenoid indicator lights

Omitted - None

9

Valve Size

10 series - 1 ¼ inch

10

Main Stage Spool Types

0,1,2,3,4,6,8,9 & 33

11

Valve Type

D - Pressure centered

12

Pilot Pressure Range

A - 300 to 1000 psi

(20 - 70 bar)

B - 1000 to 2000 psi

(70 - 138 bar)

Omitted - 2000 to 3000 psi

(138 to 207 bar)

13

Response

X 0 Fast response models (Available only for
"A" pilot pressure range)

Omitted - Standard low shock models

14

Spool Control Modifications

(Omit if not required)

2 - Pilot choke adjustment

8 - Stroke adjustment "B" end only

2-2 - Pilot choke with stroke adjustment

15

Pilot Pressure

E - External pilot pressure

Omitted - Internal pilot pressure

16

Pilot valve type

W - Wet armature

17

Coil identification letter

18

Design

19

Left Hand Assembly

(Omit for right hand assembly)

Products we offer:

- Cartridge valves
- DCV directional control valves
- Electric converters
- Electric machines
- Electric motors
- Gear motors
- Gear pumps
- Hydraulic integrated circuits (HICs)
- Hydrostatic motors
- Hydrostatic pumps
- Orbital motors
- PLUS+1® controllers
- PLUS+1® displays
- PLUS+1® joysticks and pedals
- PLUS+1® operator interfaces
- PLUS+1® sensors
- PLUS+1® software
- PLUS+1® software services, support and training
- Position controls and sensors
- PVG proportional valves
- Steering components and systems
- Telematics

Danfoss Power Solutions is a global manufacturer and supplier of high-quality hydraulic and electric components. We specialize in providing state-of-the-art technology and solutions that excel in the harsh operating conditions of the mobile off-highway market as well as the marine sector. Building on our extensive applications expertise, we work closely with you to ensure exceptional performance for a broad range of applications. We help you and other customers around the world speed up system development, reduce costs and bring vehicles and vessels to market faster.

Danfoss Power Solutions – your strongest partner in mobile hydraulics and mobile electrification.

Go to www.danfoss.com for further product information.

We offer you expert worldwide support for ensuring the best possible solutions for outstanding performance. And with an extensive network of Global Service Partners, we also provide you with comprehensive global service for all of our components.

Local address:

Hydro-Gear

www.hydro-gear.com

Daikin-Sauer-Danfoss

www.daikin-sauer-danfoss.com

**Danfoss
Power Solutions (US) Company**
2800 East 13th Street
Ames, IA 50010, USA
Phone: +1 515 239 6000

**Danfoss
Power Solutions GmbH & Co. OHG**
Krokamp 35
D-24539 Neumünster, Germany
Phone: +49 4321 871 0

**Danfoss
Power Solutions ApS**
Nordborgvej 81
DK-6430 Nordborg, Denmark
Phone: +45 7488 2222

**Danfoss
Power Solutions Trading
(Shanghai) Co., Ltd.**
Building #22, No. 1000 Jin Hai Rd
Jin Qiao, Pudong New District
Shanghai, China 201206
Phone: +86 21 2080 6201