



Hydraulically Operated Directional Control Valve

DG3V3-3-**-*(l)-(t)-(P1)-7-*-60

SPOOL/SPRING ARRANGEMENT	DRAIN TYPE	
	INTERNAL	EXTERNAL
	SPOOL NO.	SPOOL NO.
□ 0A	694537	694492
0B	694540	694435
0C	—	694435
0F	694540	—
0N	—	694494
□ 2A	694538	698839
2B	694541	698841
2C	—	698841
2F	694541	—
2N	—	698842
◆ 3B	694542	694436
◆ 3C	—	694436
◆ 3F	694542	—
□ 6A	694539	694493
6B	694543	694437
6C	—	694437
6F	694543	—
6N	—	694495
◇ 0	—	694492
◇ 2	—	698839
◇ 6	—	694493
33B	694544	694438
33C	—	694438
33F	694544	—

Spool Assembly Notes

- Assemble spools with narrow end land towards A port end of body (Reverse for left hand builds)
- ◆ Assemble type 3 spool with narrow center land toward "A" port
- ◇ Blank – no spring required (refer to model code breakdown)


697386 Detent S/A
(2 Req'd N models)

■ 694545 Spacer
(2 Req'd C models)

507889 Spring
(2 Req'd) A, B, C, & F models
Omit for N models

▲ 262353 O-Ring
(2 Req'd all models)

● Plug (see table)
Torque 30–36 N.m
(22–27 lb.ft.)

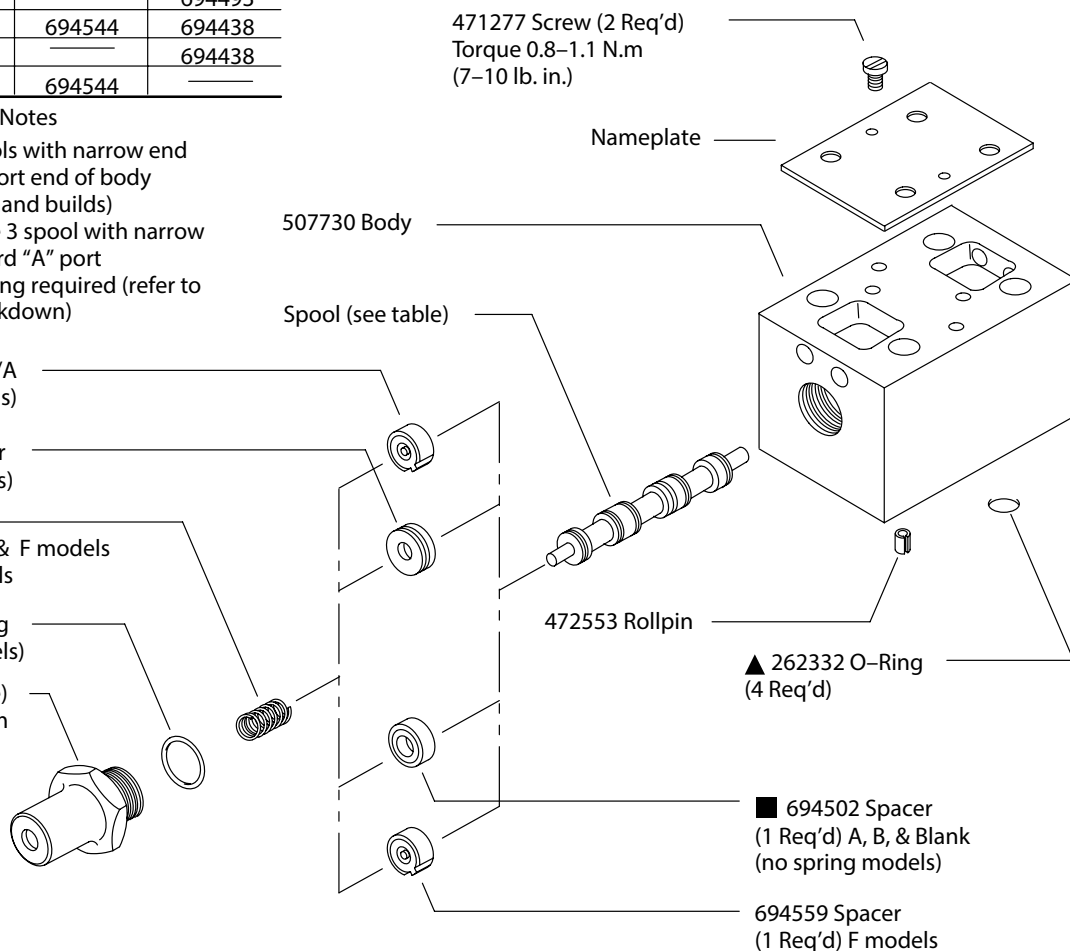

MODEL	D PLUG (qty.)
DG3V-3-**-7- B-60	694535 (2)
DG3V-3-**-7- S-60	694536 (2)
DG3V-3-**A-7- B-60	694535 (2)
DG3V-3-**A-7- S-60	694536 (2)
DG3V-3-**A-T-7- B-60	694535 (1)
DG3V-3-**A-T-7- S-60	694536 (1)
DG3V-3-**A-T-P1-7- B-60	694535 (1)
DG3V-3-**A-T-P1-7- S-60	694536 (1)
DG3V-3-**B-7- B-60	694536 (2)
DG3V-3-**B-7- S-60	694536 (2)
DG3V-3-**B-T-7- B-60	694535 (2)
DG3V-3-**B-T-7- S-60	694536 (2)
DG3V-3-**B-T-P1-7- B-60	694535 (1)
DG3V-3-**B-T-P1-7- S-60	694536 (1)
DG3V-3-**C-7- B-60	694535 (2)
DG3V-3-**C-7- S-60	694536 (2)
DG3V-3-**F-T-7- B-60	694535 (1)
DG3V-3-**F-T-7- S-60	694536 (1)
DG3V-3-**F-T-P1-7- B-60	694535 (1)
DG3V-3-**F-T-P1-7- S-60	694536 (1)
DG3V-3-**N-7- B-60	694505 (2)
DG3V-3-**N-7- S-60	694557 (2)

▲ Available in seal kit 02-110959

■ Recessed side of spacer to mate
with spool end land

507724 End cap (Internal drain models)
Torque 30 –36 N.m (22 –26 lb. ft.)

■ 694545 Spacer
(A & B models)

694558 Spacer
(F models)

694500 End cap
Torque 30 –36 N.m
(22–26 lb. ft.)

▲ 262326 O –Ring

■ 694545 Spacer
(A, B, & C models)

694558 Spacer
(F models)

Internal drain models
DG3V-3-**-A-T-7-*-60
DG3V-3-**-B-T-7-*-60
DG3V-3-**-F-T-7-*-60

Refer to other end of valve for balance of
part numbers, except as noted

External drain models
DG3V-3-**-A-7-*-60
DG3V-3-**-B-7-*-60

Refer to other end of valve for balance of
part numbers, except as noted

External drain model
DG3V-3-**-C-7-*-60
Refer to other end of valve for balance of
part numbers

External drain model
DG3V-3-**-N-7-*-60
Refer to other end of valve for balance of
part numbers

External drain model (Blank no spring)
DG3V-3-**-7-*-60
Refer to other end of valve for balance of
part numbers, except as noted

694559 Spacer (Use on Blank models
only. Assaemble next to spring with
rounded face towards spool.

Manual override option (A, B, & F
models only, in non-operator end
DG3V-3-**-A-T-P1-7-*-60
DG3V-3-**-B-T-P1-7-*-60
DG3V-3-**-F-T-P1-7-*-60

Refer to other end of valve for balance of
part numbers, except as noted

694501 Plunger

Valve Assembly Note


Right hand assembly shown for all single
operator models.

For left hand assembly all parts are
reversed except body.

For left hand assembly, external drain B
models all parts are reversed except body
and spool.

Model Code

D G 3 V - 3 - * * * (L) - (T) - (P1) - 7 - * - 60



1 Directional control valve

2 Subplate/Manifold mounted

3 Hydraulically operated

4 Rated pressure

V - 350 bar (5000 psi) on P, A & B Ports

5 Interface ISO 4401-AB-03-4-B

3 - NFPA D01, ISO 4401-03, Cetop 3
(with location pin)

6 Spool type

0 - Open center (all ports) (all models)
2 - Closed center (all ports) (all models)
3 - Closed center (P&B ports) (B, C, F models only)
6 - Closed center (P port only) (all models)
33 - Closed center (bleed A & B ports) (B, C, F models only)

7 Spool/Spring arrangement

Blank - No spring

A - Spring offset (single operator)
B - Spring centered (Single operator)
C - Spring centered
F - Spring offset, shift to center
N - N-spring detented

8 Left hand build

(Omit if not required)
L - Left hand build A, B & F models only

9 Internal drain

(Omit if not required)
T - Internal drain, (required on F models available on A & B models)

10 Manual override

(Omit if not required)
P1 - Manual override (A, B, & F models only in non-operator end) Internal drain only


11 Tank pressure limit

7 - 7 - 210 bar

12 Thread for pilot/drain connection

B - G 1/8" threads
S - SAE internal straight thread

13 Design

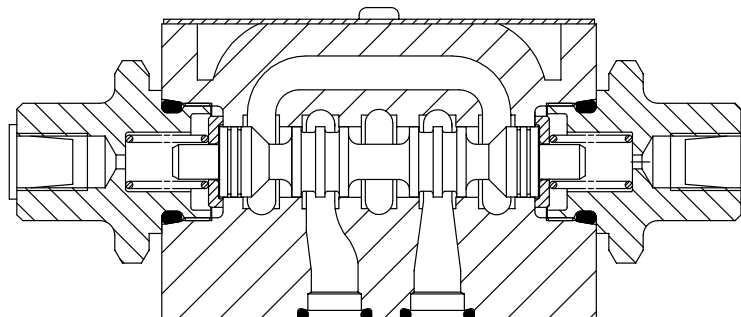

Sectional view, spring centered valve

Products we offer:

- Cartridge valves
- DCV directional control valves
- Electric converters
- Electric machines
- Electric motors
- Gear motors
- Gear pumps
- Hydraulic integrated circuits (HICs)
- Hydrostatic motors
- Hydrostatic pumps
- Orbital motors
- PLUS+1® controllers
- PLUS+1® displays
- PLUS+1® joysticks and pedals
- PLUS+1® operator interfaces
- PLUS+1® sensors
- PLUS+1® software
- PLUS+1® software services, support and training
- Position controls and sensors
- PVG proportional valves
- Steering components and systems
- Telematics

Hydro-Gear

www.hydro-gear.com

Daikin-Sauer-Danfoss

www.daikin-sauer-danfoss.com

Danfoss Power Solutions is a global manufacturer and supplier of high-quality hydraulic and electric components. We specialize in providing state-of-the-art technology and solutions that excel in the harsh operating conditions of the mobile off-highway market as well as the marine sector. Building on our extensive applications expertise, we work closely with you to ensure exceptional performance for a broad range of applications. We help you and other customers around the world speed up system development, reduce costs and bring vehicles and vessels to market faster.

Danfoss Power Solutions – your strongest partner in mobile hydraulics and mobile electrification.

Go to www.danfoss.com for further product information.

We offer you expert worldwide support for ensuring the best possible solutions for outstanding performance. And with an extensive network of Global Service Partners, we also provide you with comprehensive global service for all of our components.

Local address:

**Danfoss
Power Solutions (US) Company**
2800 East 13th Street
Ames, IA 50010, USA
Phone: +1 515 239 6000

**Danfoss
Power Solutions GmbH & Co. OHG**
Krokamp 35
D-24539 Neumünster, Germany
Phone: +49 4321 871 0

**Danfoss
Power Solutions ApS**
Nordborgvej 81
DK-6430 Nordborg, Denmark
Phone: +45 7488 2222

**Danfoss
Power Solutions Trading
(Shanghai) Co., Ltd.**
Building #22, No. 1000 Jin Hai Rd
Jin Qiao, Pudong New District
Shanghai, China 201206
Phone: +86 21 2080 6201

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed.
All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.