



Solenoid Controlled Pilot Operated Directional Valves

(F3)DG5S4-04-**(L)(**)(X)(*)(E)(T)(*)-(V)M-(S*)*(**)**(L)**5-***-60/70

MAIN STAGE SPOOL TYPE	AVAILABLE VALVE TYPE	SPOOL	MAINSTAGE ID PLATE	
			"A" ONLY	B/C/N
0	A/B/C/N	399891	433851	433852
1		*431972		433851
2		399892		433853
3		*399893		433854
4		413481		433855
6		399894		433856
8		399896		433855
9		413483		433852
11		*431972		433851
31		*399893		433851
33		399897		433856

■ PLUG TORQUES (OILED)

PLUG	N.M	lb. in.
7074	8.5-9.6	75-85
113000	5.0-5.9	45-52
367427	5.0-5.9	45-52

* Spool Assembly Note

Assemble type 1 & 3 spools with narrow center land toward "A" end of valve. "A" end is defined as being closest to CYL. port "A". Type 11 & 31 spools are installed in reverse of type 1 & 3 with narrow center lands toward "B" end of valve.

■ PLUG INSTALLATION TABLE


MODEL	"A" PLUG	"B" PLUG	"C" PLUG	
DG5S4-04*	DOES NOT EXIST	367427	OUT	
DG5S4-04*-E		113000	367427	
DG5S4-04*-X		OUT	OUT	
DG5S4-04*-X-E		113000		
DG5S4-04*-K/R/S			367427	326427
DG5S4-04*-E-K/R/S			113000	
DG5S4-04*-X-K/R/S			OUT	OUT
DG5S4-04*-X-E-K/R/S		113000		

□ 113000 SOLID PLUG

□ 367427 ORIFICE PLUG

Note

Parts included in service kits are not sold separately.

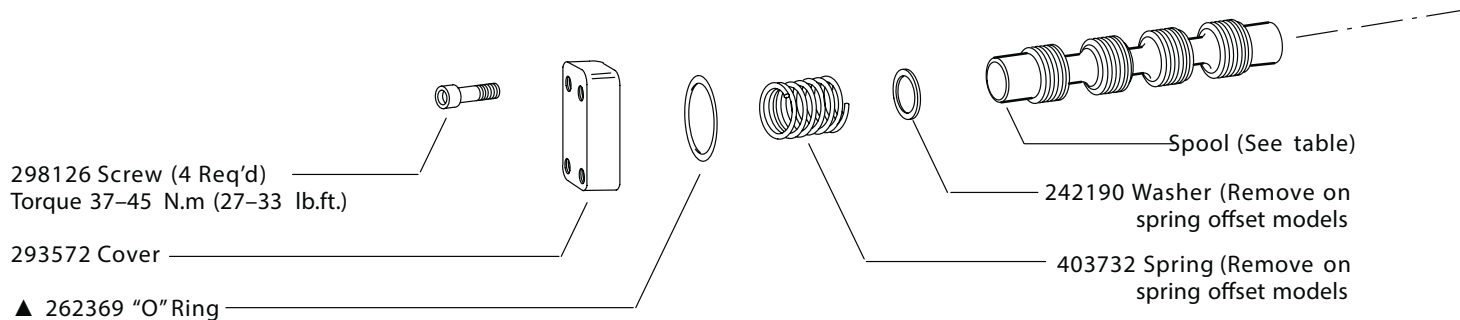

VALVE MODEL CODE	MAIN STAGE SPOOL TYPE	PILOT VALVE MODEL CODE
DG5S4-04*A	O, 1, 2, 3, 6, 9, 11, 31, 33	DG4V-3(S)-2A-60
	4 & 8	DG4V-3(S)-28A-60
DG5S4-04*B	O, 1, 2, 3, 6, 9, 11, 31, 33	DG4V-3(S)-6B-60
	4 & 8	DG4V-3(S)-68B-60
DG5S4-04*C	O, 1, 2, 3, 6, 9, 11, 31, 33, 52, 521	DG4V-3(S)-6C-60
	4 & 8	DG4V-3(S)-68C-60
DG5S4-04*N	O, 1, 2, 3, 6, 9, 11, 31, 33	DG4V-3(S)-6N-60
	4 & 8	DG4V-3(S)-68N-60

See pilot valve service drawing for parts breakdown

▲ Included In F3 Seal Kit 696897

□ Included In Plug Kit 926545

○ Used On Check Valve Models Only

■ Plug Torques (See Table)


● Available Only In Kit Of 25 Each

MODEL	○ SPRING
DG5S4-04-K	426859
DG5S4-04-R	418675
DG5S4-04-S	432350


This solenoid removed on righthand A, & B, models. Refer to service drawings for more detailed information on left hand valves.

PILOT STAGE BOLT KIT (INCLUDES 4 ATTACHING BOLTS)

MODEL	BOLT KIT
W/O Pilot choke	696899
W/ Pilot choke	696900
Torque 4.5–5.7 N. m. (39.8–50.4 lb. in.)	
See pilotchoke service drawing for parts breakdown	

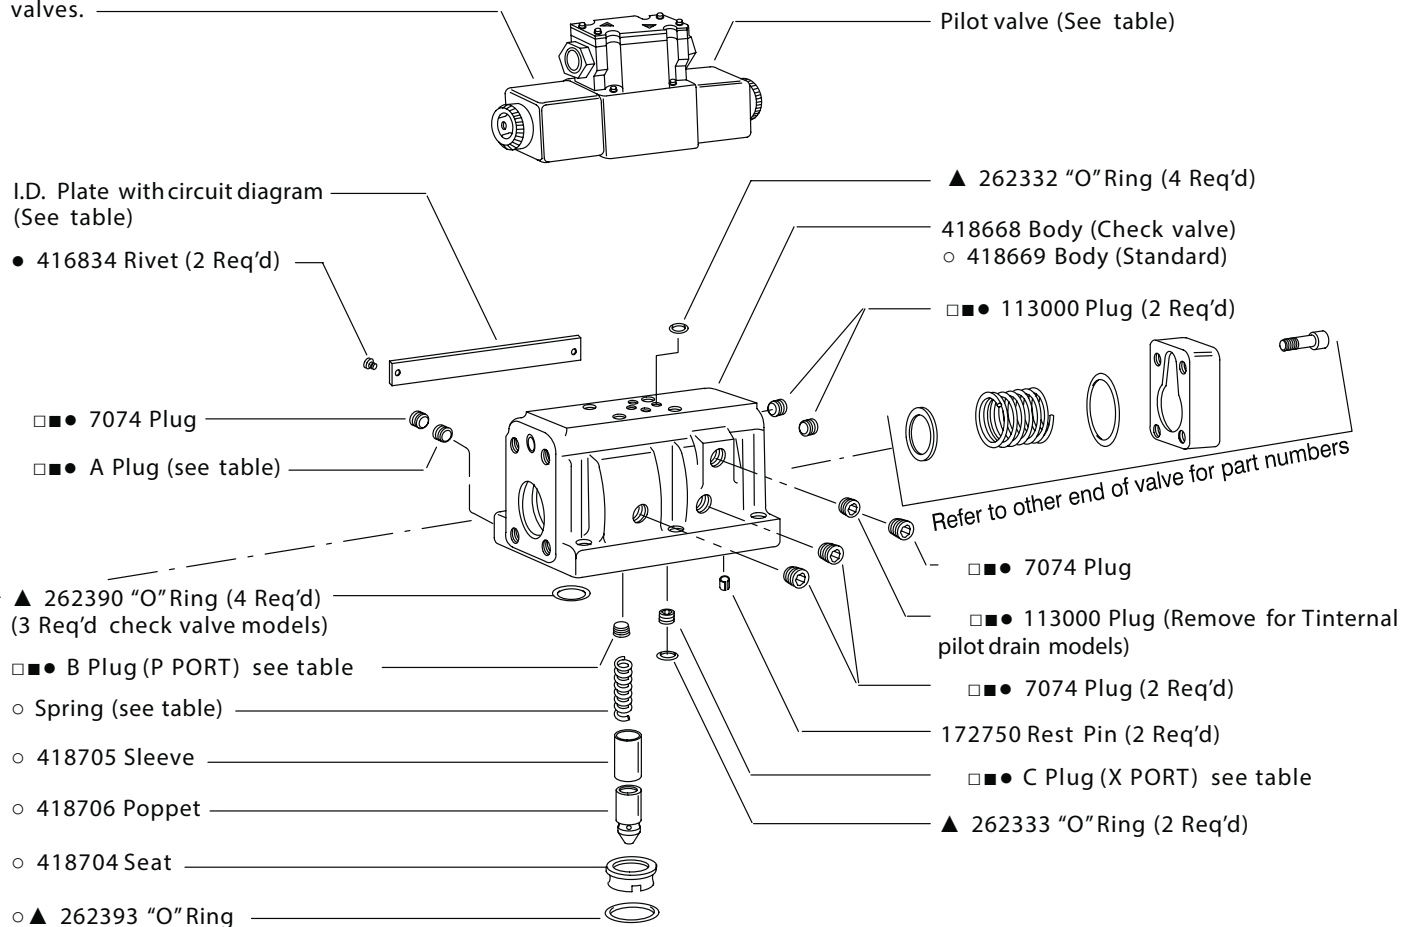

Parts shown included in 941029 stroke adjustment kit. Order two kits if stroke adjustment is required for both ends.

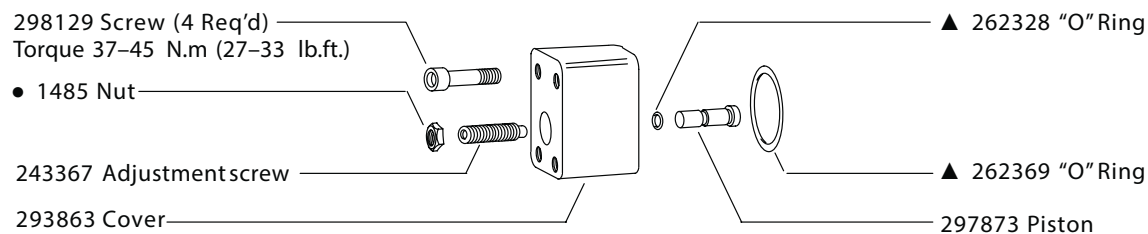

Stroke adjustment parts either end or both

Note

For satisfactory service life of these components in industrial applications, use full flow filtration to provide fluid which meets ISO cleanliness code 18/15 or better.

Model Code

(F3) DG5S4 - 04 - * * (L) (**) (X) (*) (E) (T) (*) - (V) M - (S*) * (**) * * (L) ** * - *** - 60/70

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24

1 Seals for mineral oil & fire resistant fluids

2 Directional control valve Manifold or subplate mounted Solenoid controlled Pilot operated Rated pressure 210 bar (3000psi)

3 Interface

04 – NFPA-D04
(ISO-4401-07)

4 Spool type (see table)

5 Spool/Spring arrangement

A – Spring offset, to CYL. A
B – Spring centered, sol. A removed
C – Spring centered
F – Spring offset, to CYL. A shift to center
N – No spring detented

6 Left hand

L – Left hand (single solenoid only)
Blank – Omit when not required

7 Manual override option

Blank – Plain override solenoid ends only
H – Waterproof override solenoid ends only
H2 – Waterproof override both ends of single solenoid
P2 – Plain override both ends of single solenoid
Y – Lockable manual overrides solenoid ends only/DC only
Z – No overrides in either end

8 Response type

X – Fast response
Blank – Standard low shock models

9 Spool control modifications

1 – Stroke adjustment
2 – Pilot choke adjustment
3 – Pilot choke & stroke adjustment
7 – Stroke adjustment CYL. A only
8 – Stroke adjustment CYL. B only
2-7 – Dual pilot choke & stroke ADJ. A port end only
2-8 – Dual pilot choke & stroke ADJ. B port end only
Blank – Omit when not required

10 Pilot pressure

E – External pilot pressure
Omit – Internal pilot pressure

11 Pilot drain

T – Internal pilot Drain
Omit – External pilot drain

12 Pressure port check valve

K – 0.35 bar (5 psi) cracking pressure
R – 3.45 bar (50 psi) cracking pressure
S – 5.20 bar (75 psi) cracking pressure
Blank – Omit when not required

13 Solenoid energization identity

Blank – Standard arrangement for ANSI B93.9 (energise solenoid A for flow P to A port)
V – Solenoid identification determined by position of solenoid. (Solenoid A at port A end and/or solenoid B at port B end.
(All 4 & 8 spools are always V code)

14 Flag symbol heading electrical options & features

15 Spool indicator switch

Available on high performance models, DG4V-3, only.
Omit when not required.

S1 – Options available on U only
S2 – Options available on U only
S3 – Options available on P* only
S4 – Options available on P* only
S5 – Options available on FW/FJ only

16 Coil type

U – ISO 4400
F – Flying lead
SP1 – Single 6,3 MM spade to IEC 760
SP2 – Dual 6,3 MM spade to IEC 760

17 Electrical connections (F type coil only) omit if not required

T – Wired terminal block
PA – Instaplug male receptacle only
PB – Instaplug male & female receptacle
PA3 – Three pin connector
PA5 – Five pin connector

18 Housing (F type coils only)

W – 1/2 NPT thread wiring housing
J – 20 mm thread wiring housing

19 Electrical options

1 – ISO with fitted plug, U type coils only
6 – ISO with fitted plug, & lights
U type coils only

20 Solenoid indicator lights (F build only) used with T terminal block models. (Omit if not required)

21 Coil identification

22 Pilot valve code (tank pressure rating)

2 – 10 bar (145 psi) DG4V3-60
5 – 100 bar (1450 psi) DG4V3S-60
6 – 160 bar (2285 psi) DG4V3-60
7 – 210 bar (3000 psi) DG4V3-60

23 Pilot valve port orifices

24 Design

60 – DG4V3S-60 pilot valve
70 – DG4V3-60 pilot valve

6 Thru 23 included in pilot valve model code

Products we offer:

- Cartridge valves
- DCV directional control valves
- Electric converters
- Electric machines
- Electric motors
- Gear motors
- Gear pumps
- Hydraulic integrated circuits (HICs)
- Hydrostatic motors
- Hydrostatic pumps
- Orbital motors
- PLUS+1® controllers
- PLUS+1® displays
- PLUS+1® joysticks and pedals
- PLUS+1® operator interfaces
- PLUS+1® sensors
- PLUS+1® software
- PLUS+1® software services, support and training
- Position controls and sensors
- PVG proportional valves
- Steering components and systems
- Telematics

Danfoss Power Solutions is a global manufacturer and supplier of high-quality hydraulic and electric components. We specialize in providing state-of-the-art technology and solutions that excel in the harsh operating conditions of the mobile off-highway market as well as the marine sector. Building on our extensive applications expertise, we work closely with you to ensure exceptional performance for a broad range of applications. We help you and other customers around the world speed up system development, reduce costs and bring vehicles and vessels to market faster.

Danfoss Power Solutions – your strongest partner in mobile hydraulics and mobile electrification.

Go to www.danfoss.com for further product information.

We offer you expert worldwide support for ensuring the best possible solutions for outstanding performance. And with an extensive network of Global Service Partners, we also provide you with comprehensive global service for all of our components.

Local address:

Hydro-Gear

www.hydro-gear.com

Daikin-Sauer-Danfoss

www.daikin-sauer-danfoss.com

**Danfoss
Power Solutions (US) Company**
2800 East 13th Street
Ames, IA 50010, USA
Phone: +1 515 239 6000

**Danfoss
Power Solutions GmbH & Co. OHG**
Krokamp 35
D-24539 Neumünster, Germany
Phone: +49 4321 871 0

**Danfoss
Power Solutions ApS**
Nordborgvej 81
DK-6430 Nordborg, Denmark
Phone: +45 7488 2222

**Danfoss
Power Solutions Trading
(Shanghai) Co., Ltd.**
Building #22, No. 1000 Jin Hai Rd
Jin Qiao, Pudong New District
Shanghai, China 201206
Phone: +86 21 2080 6201