



Fan Drive HIC Technical Information

Quick Reference

Fan Drive HICs	Model No.	Description	Flow	Pressure	Page
	RFDE-40-000	Fan Drive HIC with Reversing Control	10 - 40 l/min [2.6 - 10.5 US gal/min]	210 bar [3000 psi]	FD - 5
	RFDE-80-000		20 - 80 l/min [5.3 - 21.1 US gal/min]	210 bar [3000 psi]	FD - 5

Fan Drive HICs	Model No.	Description	Flow	Pressure	Page
	RFD-120-000	Fan Drive HIC with Reversing Control	Up to 120 l/min [31.7 US gal/min] See performance chart	210 bar [3000 psi]	FD - 7

Fan Drive HICs	Model No.	Description	Flow	Pressure	Page
	RFDE-40-PRV	Fan Drive HIC with Proportional and Reversing Control	10 - 40 l/min [2.6 - 10.5 US gal/min]	210 bar [3000 psi]	FD - 9
	RFDE-80-PRV		20 - 80 l/min [5.3 - 21.1 US gal/min]	210 bar [3000 psi]	FD - 9

Fan Drive HICs	Model No.	Description	Flow	Pressure	Page
	RFD-120-PRV	Fan Drive HIC with Proportional and Reversing Control	Up to 120 l/min [31.7 US gal/min] See performance chart	210 bar [3000 psi]	FD - 11



Fan Drive HIC Technical Information

Application notes

OVERVIEW


Off-highway mobile machinery OEMs and distributors can choose from six pre-engineered Hydraulic Integrated Circuits (HICs) designed to provide speed control and reversing for hydraulic modulating fan drive motors in open circuit hydraulic fan drive systems. The program includes:

- 40, 80, and 120 LPM Frame Sizes
- Variable piston pump or fixed pump circuits
- Over-Pressure Protection / Anti-Cavitation is standard
- Viton O-rings are standard

40 & 80 LPM	120 LPM
RFDE-40-000 & RFDE-80-000	RFD-120-000

Variable pump fan drive circuits:

- Provide reversing control and over-pressure protection/anti-cavitation



Fixed pump fan drive circuits:

- Provide modulating and reversing control with over-pressure protection/anti-cavitation





RFDE-40-PRV & RFDE-80-PRV	RFD-120-PRV
---------------------------	-------------

Functions

- Proportional relief valve:
 - Regulates fan speed by controlling pressure drop across fan motor
 - Normally closed to ensure full fan speed in the absence of electrical signal
 - PLUS+1® compliant
- Piloted directional control valve:
 - Reverses flow to the fan motor to reverse fan direction
 - Open transition spool reduces pressure spikes during reversals
 - Sized to minimize parasitic losses due to pressure drop
- Dual shock valve with anti-cavitation checks:
 - Trims the maximum motor torque by absorbing pressure spikes (shock effects) at the work ports
 - Anti-cavitation feature allows additional flow to the motor through the tank port when motor overruns the pump
 - PVLP shock valves (from PVG) allow for a compact design
- Custom designs available upon request

Circuits - Variable Pump or Fixed Pump

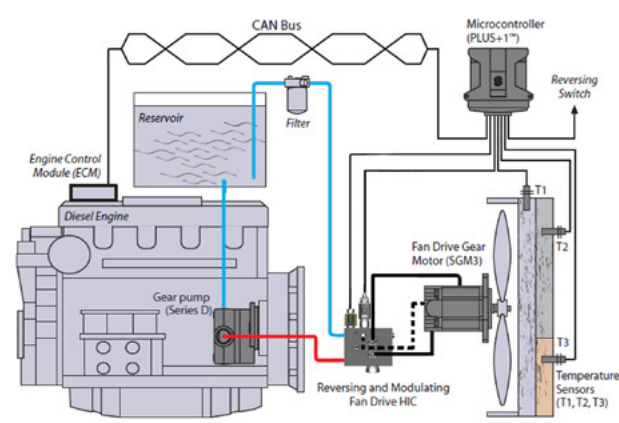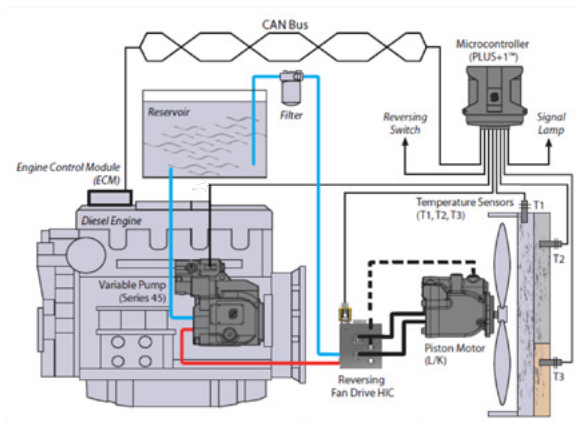

RFDE-40-000, RFDE-80-000 & RFD-120-000

- Variable Pump fan drive circuits
- HIC provides reversing control and over-pressure protection/anti-cavitation
- Variable pump provides modulation (speed control)

RFDE-40-PRV, RFDE-80-PRV & RFD-120-PRV

- Fixed Pump fan drive circuits
- HIC provides modulating and reversing control with over-pressure protection/anti-cavitation


Features

- Proportional Fan Speed Control:
 - Electronically match fan speed with cooling demand
 - Conserve engine power and fuel for the majority of operating conditions - as compared to non-proportional systems
- Increased design flexibility:
 - The compact HIC valve can be placed in the most suitable location on the machine
 - Minimize fan system pressure losses when choosing the optimal fan drive HIC size for the application
 - Internal and external reversing pilot options available (40 LPM & 80 LPM)
 - Drain port included on all models for motor case drain
 - Robust IP69K Deutsch coil standard for all three sizes
- Increased productivity:
 - Fan is reversible to purge (de-clog) coolers and radiators
 - Prevents overheating with purged cooler
 - More power available for useful work when radiator is not clogged

Features (continued)

- Automatic cleaning sequence programmed using PLUS+1™:
 - Manual or automatic activation
 - Reference Danfoss Power Solutions 'Fan Drive Application Block' information
- Custom designs available upon request

Service screen below illustrates an example reversing fan drive software setup

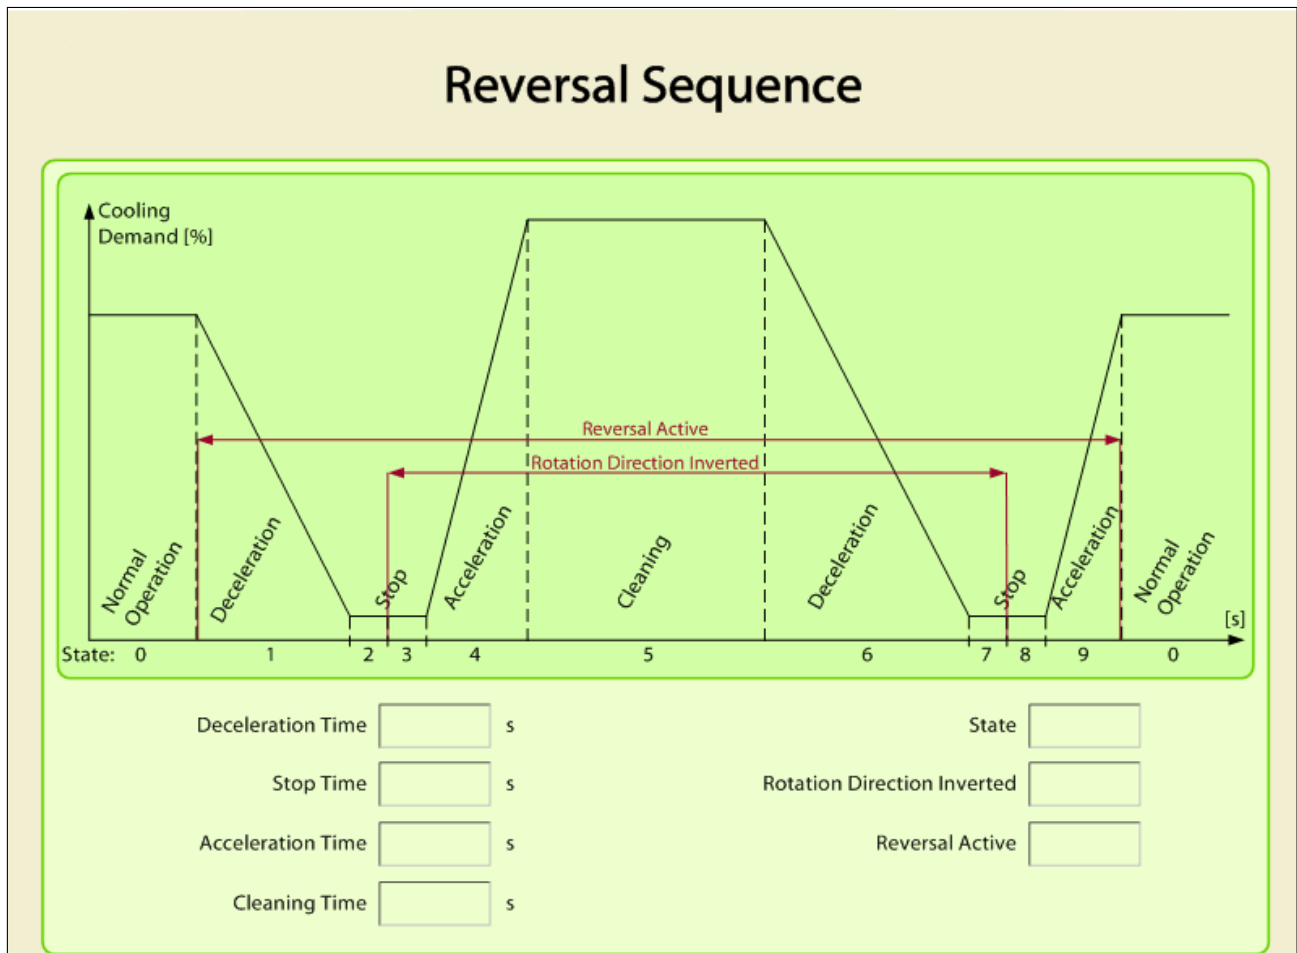



Fan Drive HIC Technical Information

Reversing Control

RFDE-40-000 & RFDE-80-000



OPERATION

This HIC reverses flow to the fan motor to reverse fan direction. It includes a DV15-P5-FD open transition spool valve to reduce pressure spikes during reversals. Internal and external piloting options are available. The HIC trims the maximum motor torque by absorbing pressure spikes at the work ports. An anti-cavitation feature allows additional flow to the motor when the motor over-runs the pump.

APPLICATIONS


This HIC can be used for fan reversal in circuits using a variable pump. Use this HIC for mobile equipment such as wheel loaders for purging (de-clogging) coolers and radiators to prevent overheating and increase cooling system efficiency. A drain port is included for motor case drain.





SPECIFICATIONS

Rated pressure	210 bar [3045 psi]
Flow range - RFDE-40-000	10 - 40 l/min [2.6 - 10.5 US gal/min]
Flow range - RFDE-80-000	20 - 80 l/min [5.3 - 21.1 US gal/min]
Weight	3.8 kg [8.37 lb]
Valves	DV15-P5-24-FD, SVP08-NC, PVLP
Minimum shift pressure	2 bar [29 psi]
Robust Coil (Standard)	R13 16 Watt (IP69K)
Diode (Optional)	Bi-directional

PERFORMANCE CURVE

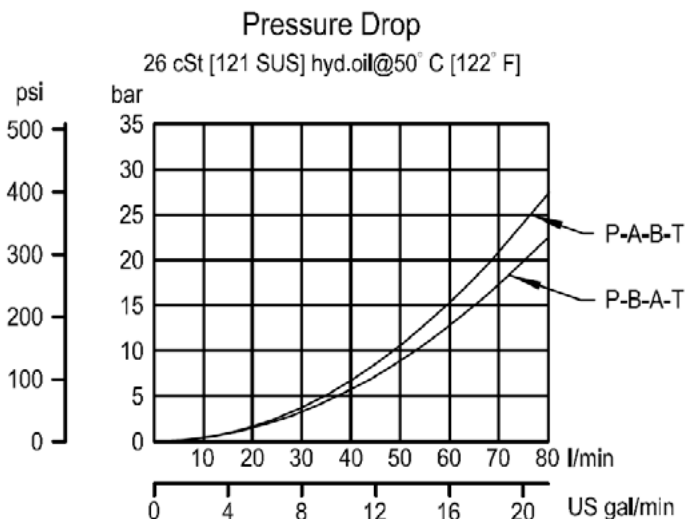

SCHEMATICS

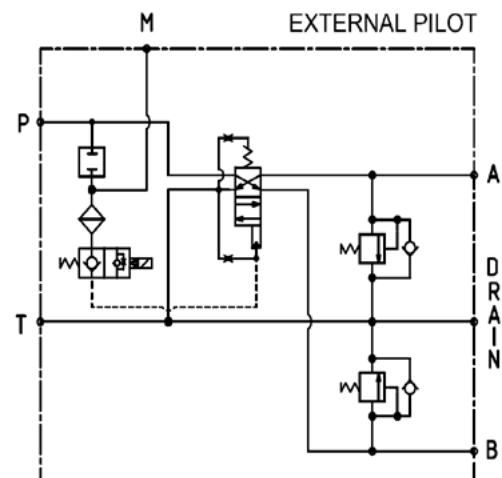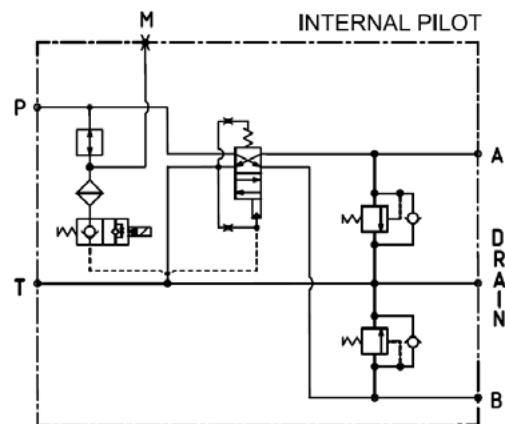




Fan Drive HIC Technical Information

Reversing Control


RFDE-40-000 & RFDE-80-000

DIMENSION DRAWING

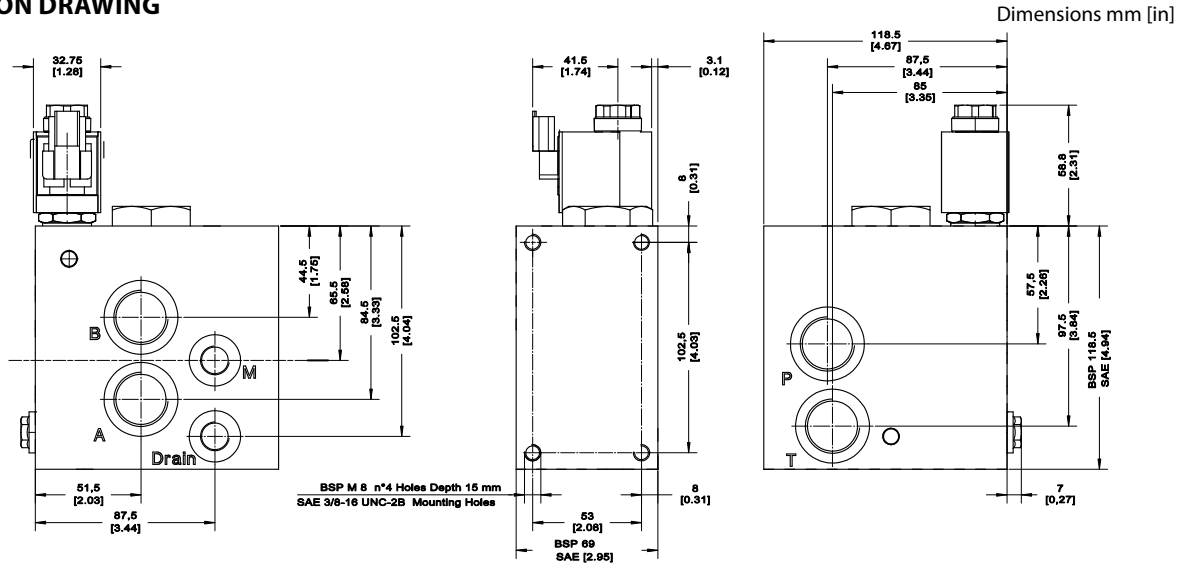


EXAMPLE CIRCUITS

Internal Pilot (00)

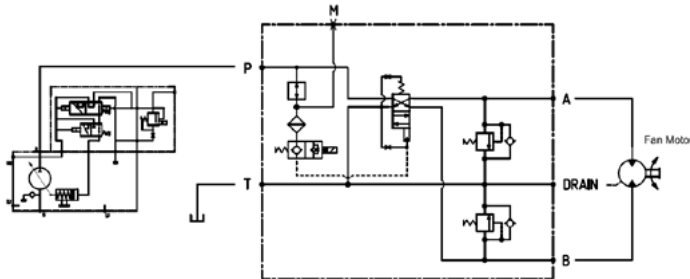

External Pilot (E)

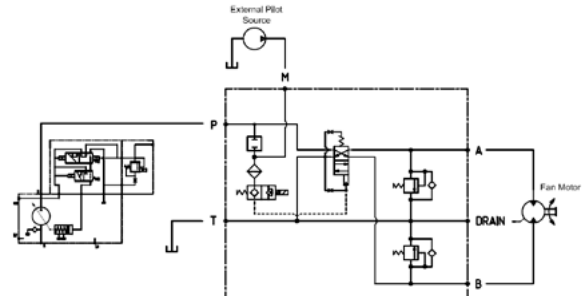

ORDERING INFORMATION

RFDE - 80 - 000 - R12D - DE - NP - 250 - E - 12S

Reversing Fan Drive,
Extended Program

Flow Capacity
40: 40 LPM [10.5 GPM]
80: 80 LPM [21.7 GPM]

000:
No Proportional Relief Valve;
Variable Pump Circuit

Coil Voltage & Termination

Voltage Description	Termination Description (Solenoid Valve)	Solenoid Valve: Robust Coil (R13) Code	IP Rating
12 VDC	Deutsch	R12D - DE	IP69K
	Deutsch with Diode	R12D-DEDB	IP69K
24 VDC	Deutsch	R24D - DE	IP69K
	Deutsch with Diode	R24D - DEDB	IP69K

NP:
No PRV Valve

Pilot to Shift:
00: Internal Pilot
E: External Pilot

Order Code	Ports
6B	3/4 BSP, AL
12S	#12 SAE, AL

Shock valve setting (Keep at least 25 bar higher than maximum control pressure)


80 bar [1160 psi]	180 bar [2755]
100 bar [1450 psi]	210 bar [3045 psi]
125 bar [1813 psi]	230 bar [3335 psi]
150 bar [2175 psi]	240 bar [3480 psi]
175 bar [2538 psi]	250 bar [3335 psi]

OPERATION

The RFD-120-000 reverses flow to the fan motor to reverse fan direction. It includes open transition spools in the directional valves to reduce pressure spikes during reversals. This HIC trims the maximum motor torque by absorbing pressure spikes at the work ports. An anti-cavitation feature allows additional flow to the motor when the motor over-runs the pump.

APPLICATIONS


The RFD-120-000 can be used for fan reversal in circuits using a variable pump. Use this HIC for applications requiring up to 120 LPM (31.6 GPM) including mobile equipment such as wheel loaders for purging (de-clogging) coolers and radiators to prevent overheating and increase cooling system efficiency.

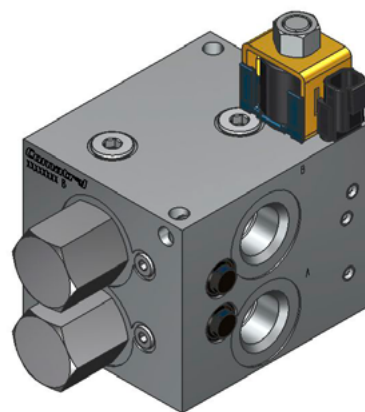


SPECIFICATIONS

Rated pressure	210 bar [3045 psi]
Flow	Up to 120 l/min [31.7 US gal/min] See performance chart
Weight	4.26 kg [9.40 lb]
Valves	CP722-5, SV08-24-01, PVLP
Robust Coil	R13 16 Watt (IP69K)
Diode (Optional)	Bi-directional

SCHEMATIC

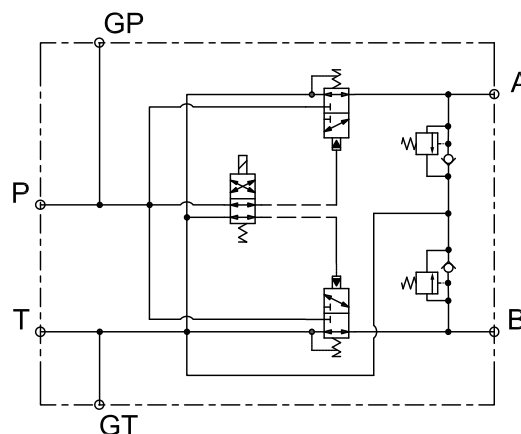

PERFORMANCE CURVE

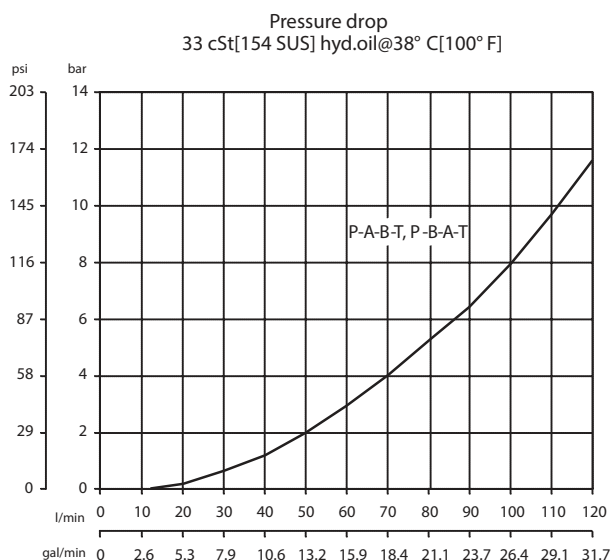




Fan Drive HIC Technical Information

Reversing Control


RFD-120-000

DIMENSION DRAWING

Dimensions mm [in]

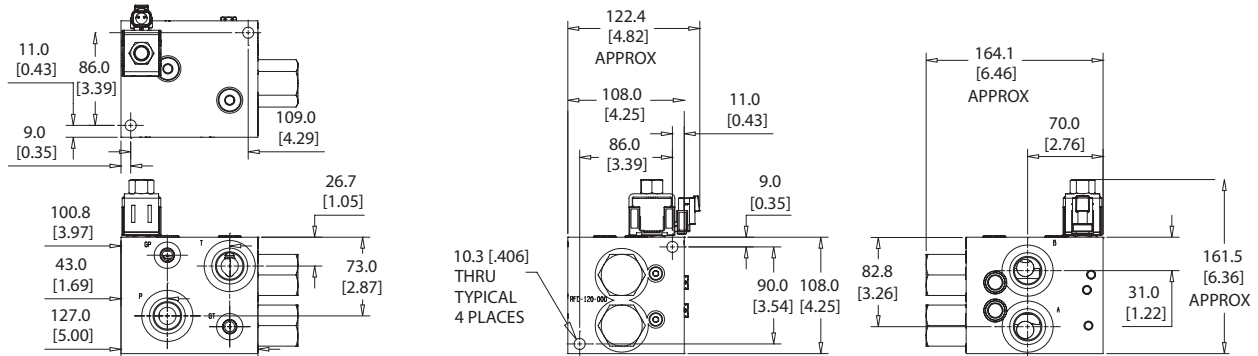

EXAMPLE CIRCUITS

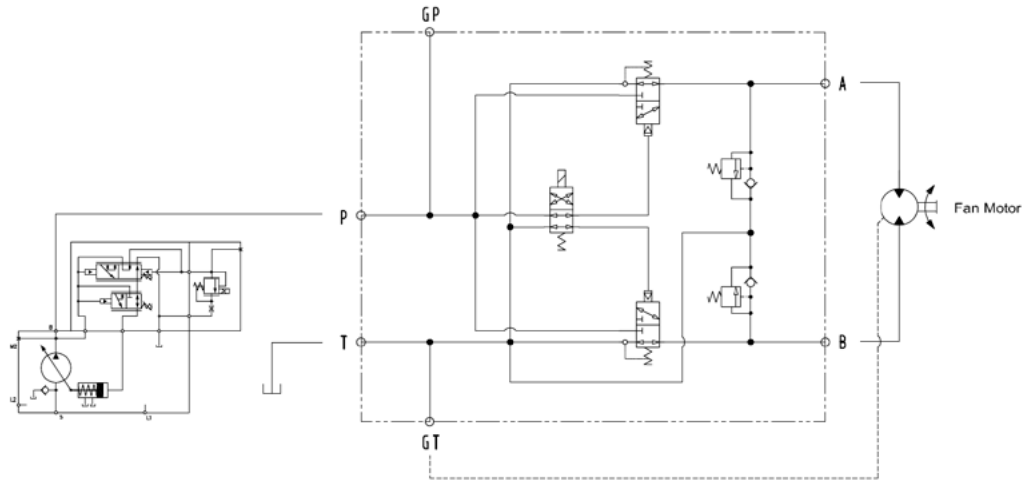

ORDERING INFORMATION

RFD - 120 - 000 - 12L - DE - NP - 250 - 12S

Reversing Fan Drive

Flow Capacity
120: 120 LPM [31.6 GPM]

000:
No Proportional Relief Valve;
Variable Pump Circuit

Coil Voltage & Termination

NP:
No PRV Valve

Order Code	Ports
6B	3/4 BSP, AL
12S	#12 SAE, AL

Shock valve setting (Keep at least 25 bar higher than maximum control pressure)

80 bar [1160 psi]	180 bar [2755]
100 bar [1450 psi]	210 bar [3045 psi]
125 bar [1813 psi]	230 bar [3335 psi]
150 bar [2175 psi]	240 bar [3480 psi]
175 bar [2538 psi]	250 bar [3625 psi]

Voltage Description	Termination Description (Solenoid Valve)	Solenoid Valve: Robust Coil (R13) Code	IP Rating
12 VDC	Deutsch	12L - DE	IP69K
	Deutsch with Diode	12L - DEDB	IP69K
24 VDC	Deutsch	24L - DE	IP69K
	Deutsch with Diode	24L - DEDB	IP69K



Fan Drive HIC Technical Information

Proportional and Reversing Control

RFDE-40-PRV & RFDE-80-PRV



OPERATION

This HIC regulates fan speed by controlling pressure drop across the fan motor. It operates in a normally closed configuration in the absence of an electrical signal. The HIC reverses flow to the fan motor to reverse fan direction. It includes a DV15-P5-FD open transition spool valve to reduce pressure spikes during reversals. Internal and external piloting options are available. This HICs trims the maximum motor torque by absorbing pressure spikes at the work ports. An anti-cavitation feature allows additional flow to the motor when the motor over-runs the pump.





APPLICATIONS

This HIC includes an integrated proportional relief valve to modulate fan speed in circuits using a fixed pump. It can also be used for fan reversal. Use this HIC for mobile equipment such as wheel loaders for purging (de-clogging) coolers and radiators to prevent overheating and increase cooling system efficiency. A drain port is included for motor case drain.




SPECIFICATIONS

Rated pressure	210 bar [3045 psi]
Flow range - RFDE-40-PRV	10 - 40 l/min [2.6 - 10.5 US gal/min]
Flow range - RFDE-80-PRV	20 - 80 l/min [5.3 - 21.1 US gal/min]
Weight	4.0 kg [9.0 lb]
Valves	DV15-P5-24-FD, SVP08-NC, PRV10-IS2, PVLP
Minimum pilot pressure	2 bar [29 psi]
Robust Coil (Standard)	R13 16 Watt (IP69K)
Diode (Optional)	Bi-directional (Not available with PRV10-IS2) M19P 22 Watt [IS2] (IP69K)

SCHEMATICS

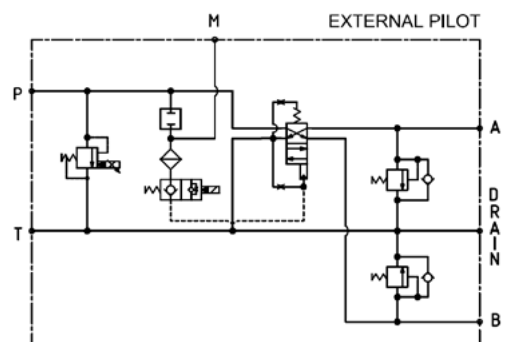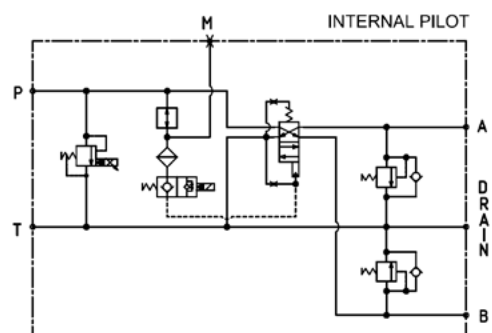

PERFORMANCE CURVES

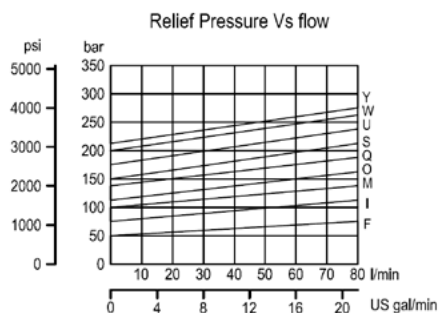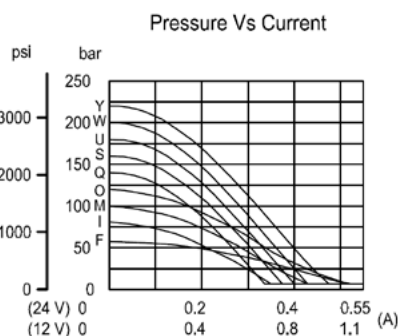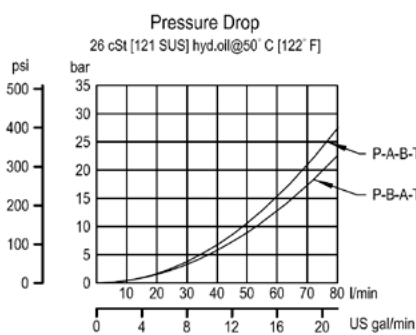


Fan Drive HIC Technical Information

Proportional and Reversing Control

RFDE-40-PRV & RFDE-80-PRV


DIMENSION DRAWING

Dimensions mm [in]

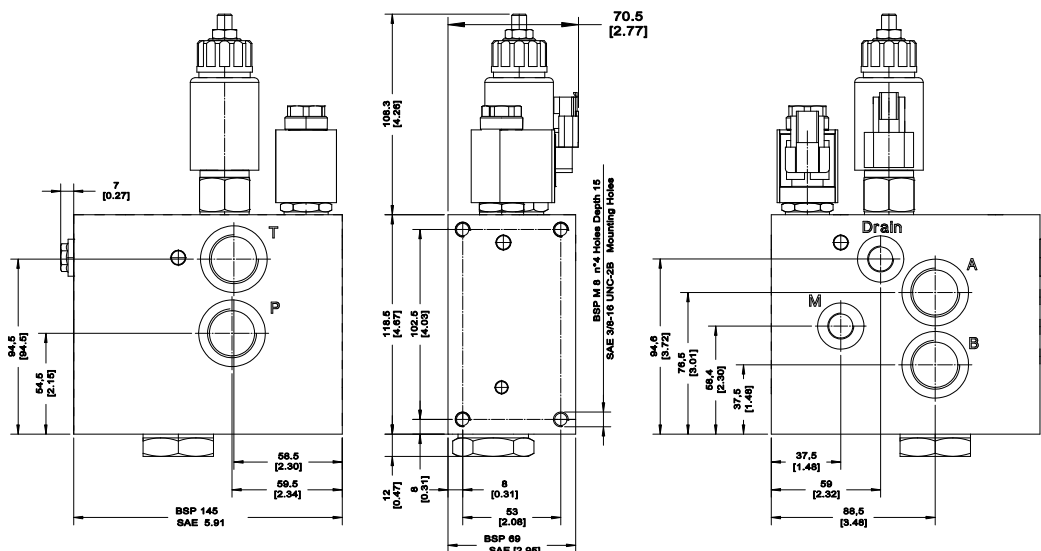


EXAMPLE CIRCUITS

Internal Pilot (00)

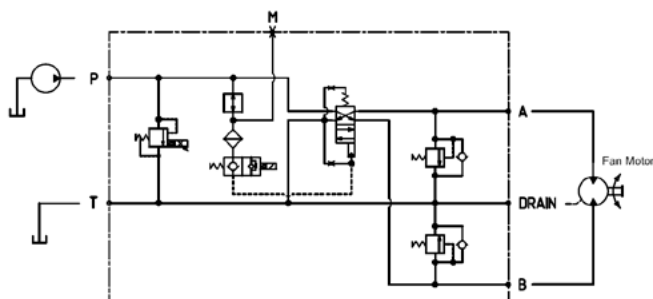

External Pilot (E)

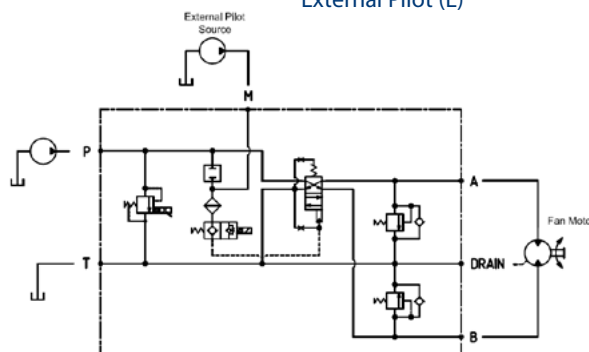

ORDERING INFORMATION

RFDE - 80 - PRV - R12D - DE - W - 250 - E - 12S

Reversing Fan Drive, Extended Program

Flow Capacity
40: 40 LPM [10.5 GPM]
80: 80 LPM [21.1 GPM]

PRV:
Proportional Relief Valve;
Fixed Pump Circuit

Coil Voltage & Termination	
Voltage	Term
120V	120V
240V	240V
360V	360V
480V	480V
600V	600V
720V	720V
840V	840V
960V	960V
1080V	1080V
1200V	1200V
1320V	1320V
1440V	1440V
1560V	1560V
1680V	1680V
1800V	1800V
1920V	1920V
2040V	2040V
2160V	2160V
2280V	2280V
2400V	2400V
2520V	2520V
2640V	2640V
2760V	2760V
2880V	2880V
3000V	3000V
3120V	3120V
3240V	3240V
3360V	3360V
3480V	3480V
3600V	3600V
3720V	3720V
3840V	3840V
3960V	3960V
4080V	4080V
4200V	4200V
4320V	4320V
4440V	4440V
4560V	4560V
4680V	4680V
4800V	4800V
4920V	4920V
5040V	5040V
5160V	5160V
5280V	5280V
5400V	5400V
5520V	5520V
5640V	5640V
5760V	5760V
5880V	5880V
6000V	6000V
6120V	6120V
6240V	6240V
6360V	6360V
6480V	6480V
6600V	6600V
6720V	6720V
6840V	6840V
6960V	6960V
7080V	7080V
7200V	7200V
7320V	7320V
7440V	7440V
7560V	7560V
7680V	7680V
7800V	7800V
7920V	7920V
8040V	8040V
8160V	8160V
8280V	8280V
8400V	8400V
8520V	8520V
8640V	8640V
8760V	8760V
8880V	8880V
9000V	9000V
9120V	9120V
9240V	9240V
9360V	9360V
9480V	9480V
9600V	9600V
9720V	9720V
9840V	9840V
9960V	9960V
10080V	10080V
10200V	10200V
10320V	10320V
10440V	10440V
10560V	10560V
10680V	10680V
10800V	10800V
10920V	10920V
11040V	11040V
11160V	11160V
11280V	11280V
11400V	11400V
11520V	11520V
11640V	11640V
11760V	11760V
11880V	11880V
12000V	12000V
12120V	12120V
12240V	12240V
12360V	12360V
12480V	12480V
12600V	12600V
12720V	12720V
12840V	12840V
12960V	12960V
13080V	13080V
13200V	13200V
13320V	13320V
13440V	13440V
13560V	13560V
13680V	13680V
13800V	13800V
13920V	13920V
14040V	14040V
14160V	14160V
14280V	14280V
14400V	14400V
14520V	14520V
14640V	14640V
14760V	14760V
14880V	14880V
15000V	15000V
15120V	15120V
15240V	15240V
15360V	15360V
15480V	15480V
15600V	15600V
15720V	15720V
15840V	15840V
15960V	15960V
16080V	16080V
16200V	16200V
16320V	16320V

Voltage Description	Termination Description (Solenoid Valve / Proportional Valve)	Solenoid Valve: Robust Coil (R13) Code	IP Rating
12 VDC	Deutsch / Deutsch*	R12D - DE	IP69K
	Deutsch with Diode / Deutsch*	R12D - DEDB	IP69K
24 VDC	Deutsch / Deutsch*	R24D - DE	IP69K
	Deutsch with Diode / Deutsch*	R24D - DEDB	IP69K

* Proportional Relief Valve (PRV) coil M19P only available with Deutsch termination

Pilot to Shift:
00: Internal Pilot
E: External Pilot

Order Code	Ports
6B	3/4 BSP, AL
12S	#12 SAE, AL

- Shock valve setting (Keep at least 25 bar higher than maximum control pressure)

80 bar [1160 psi]	180 bar [2755]
100 bar [1450 psi]	210 bar [3045 psi]
125 bar [1813 psi]	230 bar [3335 psi]
150 bar [2175 psi]	240 bar [3480 psi]
175 bar [2538 psi]	250 bar [3635 psi]

Proportional Relief Setting

F 55 bar [709 psi]	S 155 bar [2248 psi]
I 85 bar [1233 psi]	U 185 bar [2683 psi]
M 105 bar [1523 psi]	W 205 bar [2973 psi]
O 125 bar [1813 psi]	Y 225 bar [3263 psi]
Q 135 bar [1958]	NP No Setting (CAV option only)




Fan Drive HIC Technical Information

Proportional and Reversing Control

RFD-120-PRV

OPERATION

The RFD-120-PRV regulates fan speed by controlling pressure drop across the fan motor. It operates in a normally closed configuration in the absence of an electrical signal. This HIC reverses flow to the fan motor to reverse fan direction. It includes open transition spools in the directional valves to reduce pressure spikes during reversals. The RFD-120-PRV trims the maximum motor torque by absorbing pressure spikes at the work ports. An anti-cavitation feature allows additional flow to the motor when the motor over-runs the pump.




APPLICATIONS

The RFD-120-PRV includes an integrated proportional relief valve to modulate fan speed in circuits using a fixed pump. It can also be used for fan reversal. Use this HIC for mobile equipment for applications requiring up to 120 LPM (31.6 GPM) such as wheel loaders for purging (de-clogging) coolers and radiators to prevent overheating and increase cooling system efficiency.



SPECIFICATIONS

Rated pressure	210 bar [3045 psi]
Flow	Up to 120 l/min [31.7 US gal/min] See performance chart
Weight	15.7 kg [6.93 lb]
Valves	CP722-5, SV08-24-01, PRV12-IS2, PVLP
Robust Coil (Standard)	R13 16 Watt (IP69K)
Diode (Optional)	Bi-directional (Not available with PRV12-IS2) M19P 22 Watt [IS2] (IP69K)

SCHEMATIC

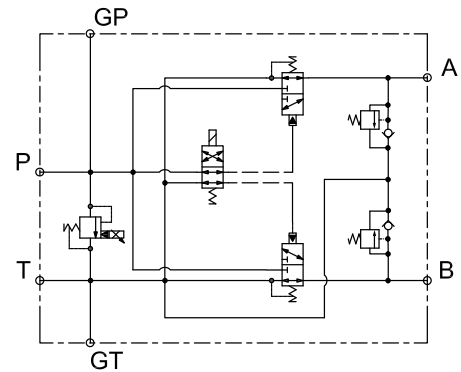

PERFORMANCE CURVES

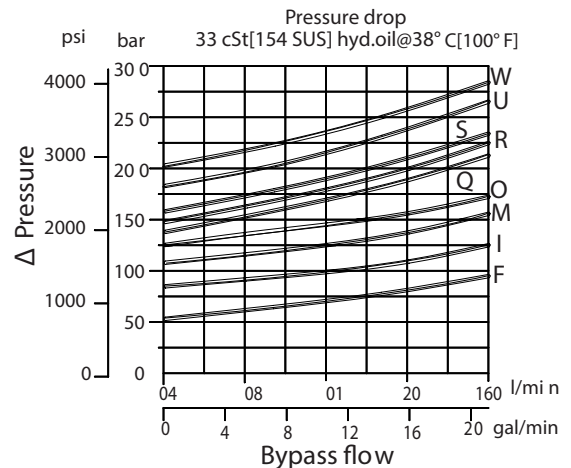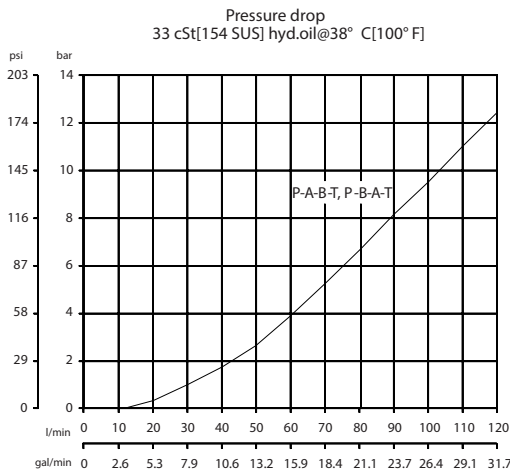




Fan Drive HIC Technical Information

Proportional and Reversing Control


RFD-120-PRV

DIMENSION DRAWING

Dimensions mm [in]

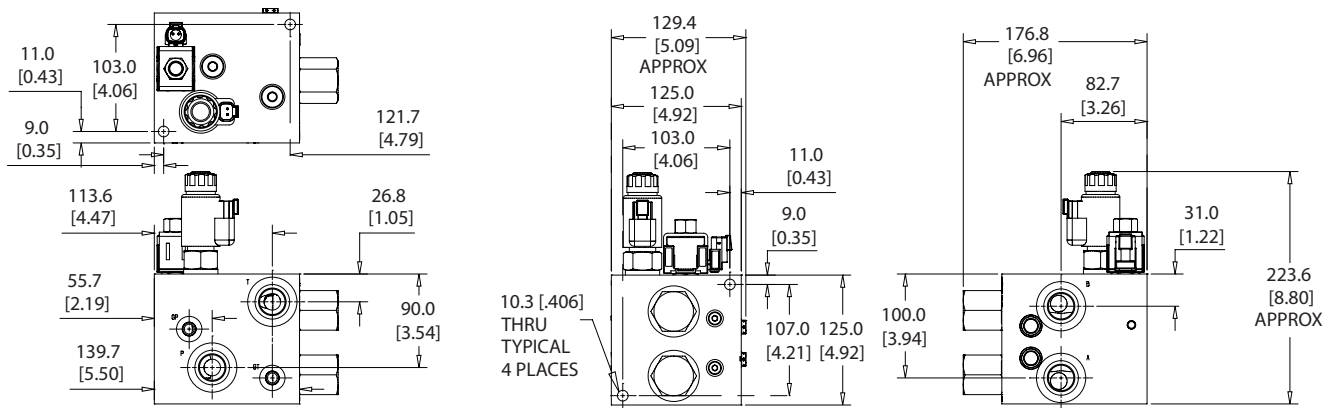

EXAMPLE CIRCUITS

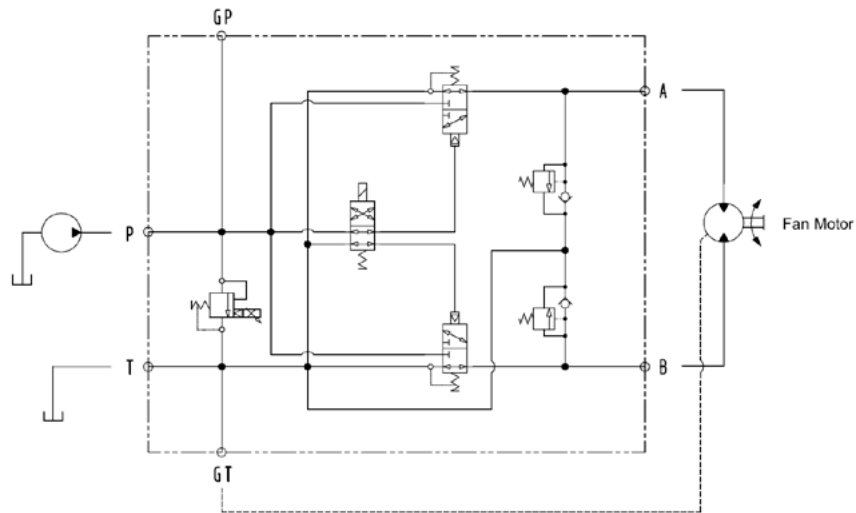

ORDERING INFORMATION

RFD - 120 - PRV - 12L - DE - W - 250 - 12S

Reversing Fan Drive

Flow Capacity
120: 120 LPM [31.6 GPM]

PRV:
Proportional Relief Valve;
Fixed Pump Circuit

Coil Voltage & Termination

Voltage Description	Termination Description (Solenoid Valve/ Proportional Valve)	Solenoid Valve: Robust Coil (R13) Code	IP Rating
12 VDC	Deutsch / Deutsch*	12L - DE	IP69K
	Deutsch with Diode / Deutsch*	12L - DEDB	IP69K
24 VDC	Deutsch / Deutsch*	24L - DE	IP69K
	Deutsch with Diode / Deutsch*	24L - DEDB	IP69K

* Proportional Relief Valve (PRV) coil M19P only available with Deutsch termination

Order Code	Ports
6B	3/4 BSP, AL
12S	#12 SAE, AL

Shock valve setting (Keep at least 25 bar higher than maximum control pressure)

80 bar [1160 psi]	180 bar [2755]
100 bar [1450 psi]	210 bar [3045 psi]
125 bar [1813 psi]	230 bar [3335 psi]
150 bar [2175 psi]	240 bar [3480 psi]
175 bar [2538 psi]	250 bar [3625 psi]

Proportional Relief Setting

F 50 bar [725 psi]	Q 145 bar [2103]
I 80 bar [1160 psi]	S 165 bar [2393 psi]
M 105 bar [1523 psi]	U 190 bar [2756 psi]
O 125 bar [1813 psi]	W 210 bar [2973 psi]