

Shuttle Valves

VS 10




Load Shuttle Valve, Line Mounted, 3/8 BSP
210 bar [3000 psi] • 45 l/min [12 US gpm]

DESCRIPTION AND OPERATION


This valve senses the higher of two input pressures and routes it to the output port.

SCHEMATIC



DIMENSIONS


mm [in]

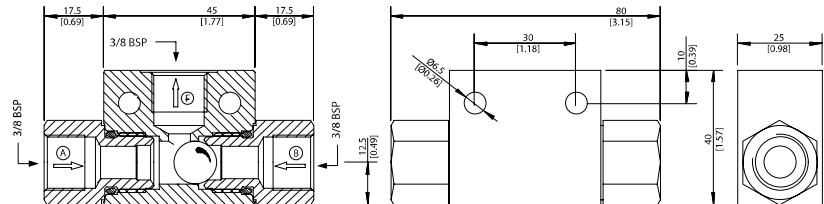

PERFORMANCE DATA

Rated pressure	210 bar [3000 psi]
Rated flow at 7 bar [100psi]	45 l/min [12 US gpm]
Leakage	6 drops/min @ Rated pressure
Weight	0.19 kg [0.42 lb]

PERFORMANCE CURVES

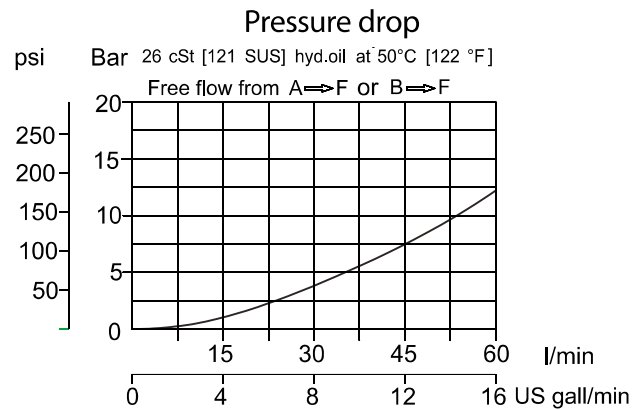

MODEL CODE

VS 10 - G - V

Seal Option

Omit-Buna-N

V-Viton