

OPERATION

The PC12-PS is a 12-size, load sense, priority, static, pressure compensator. The valve will provide on-demand priority flow to port 2 in the required amount (dependent on the load sense pressure on port 1), allowing the excess flow to go to auxiliary functions through port 4.


APPLICATION

Common applications include steering circuits that require pre-compensated, priority flow to go to the steering system, and the excess flow will go to an auxiliary function, like a fan motor. To obtain dynamic load sensing (priority type pre-comp) add in orifice between ports 2 and 1 in the manifold. This provides faster response and is commonly used in steering to flush out LS line. See Circuit Example.

SPECIFICATION


Rated pressure	210 bar [3045 psi]
Rated flow at 7 bar [100 psi]	75 l/min [20 US gal/min]
Weight	0.31 kg [0.68 lb]
Cavity	CP12-4

SCHEMATIC



Theoretical performance

PERFORMANCE CURVE

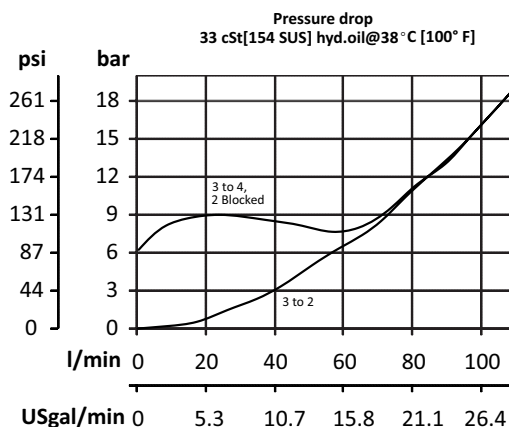


Logic Elements Technical Information

Pressure Compensator PC12-LPS


DIMENSION

mm [in]

Cross-sectional view

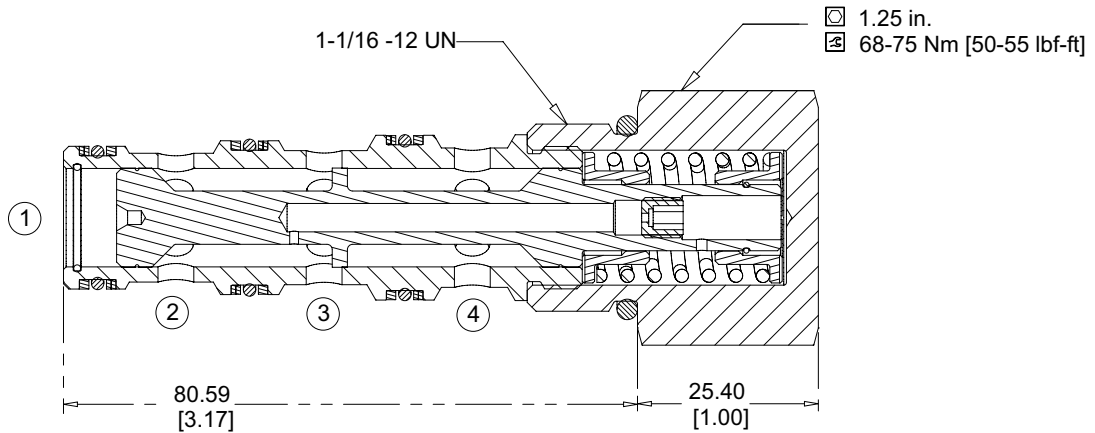

EXAMPLE CIRCUITS

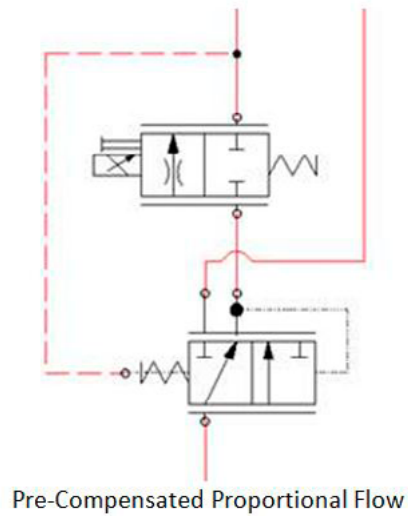

ORDERING INFORMATION

PC12-LPS-5.5-B-00

Differential Control Pressure
5.5 = 5.5 bar [80 psi]
7.0 = 7 bar [100 psi]
10.0 = 10.0 bar [150 psi]

Housing and ports
00 = No Housing
3B = Al, 1/2 BSP
4B = Al, 3/4 BSP
10S = Al, #10 SAE
12S = Al, #12 SAE

Housing Part #
No Housing
CP12-4-3B
CP12-4-4B
CP12-4-10S
CP12-4-12S

Seals
B = Buna-N
V = Viton

Seal Kit
120262
120263