



Flow Control Valves Technical Information


Velocity Fuse BC 13

OPERATION

This is an in-line flow limiter that closes and then provides non-compensated restricted flow when the specified flow setting is exceeded. The valve provides free reverse flow when operated in the opposite direction.


SPECIFICATIONS

Schematic

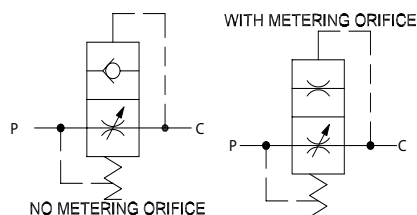


Theoretical performance

Pressure drop from P $\Rightarrow$ C according to Adjustment H
26 cSt [121 SUS] hyd.oil at 50°C [122 °F]

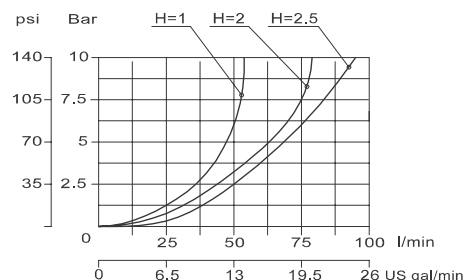

Values for adjustment H are guideline only, being conditioned by a variety of factors (oil temperature and viscosity, volume and flexibility of circuits).

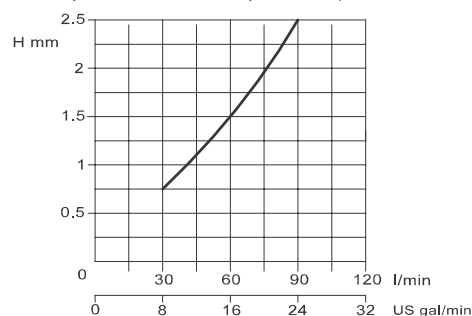


Specifications

Pressure rating	210 bar [3000 psi]
Rated Free Flow at 7 bar [100 psi]	85 l/min [30 US gal/min]
Cavity	Consult factory

DIMENSIONS

mm in

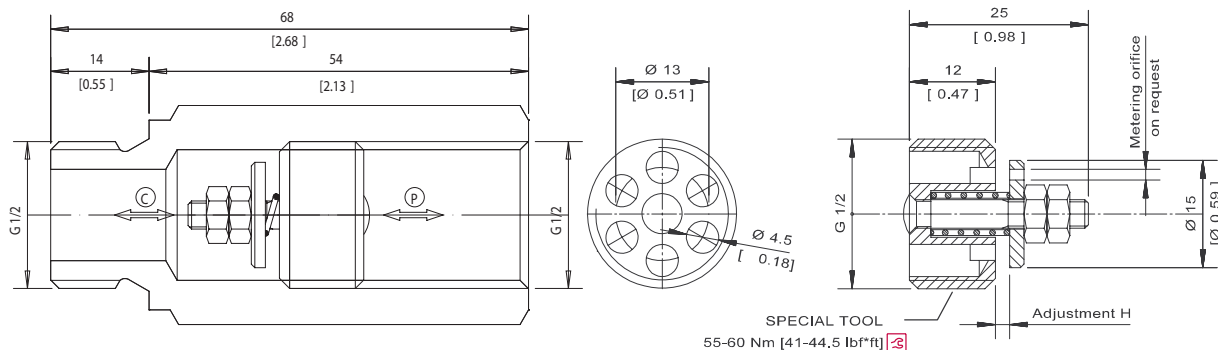

ORDERING INFORMATION

BC 13 - 1.0 - G - 00 - S1.5

Adjustment H

00 = No factory adjustment
0.25 = 0.25 mm [in]
0.5 = 0.5 mm [in]
1.0 = 1.0 mm [in]
1.5 = 1.5 mm
2.0 = 2.0 mm

Metering orifice

Omit = No orifice
S0.5 = 0.5 mm [in]
S0.7 = 0.7 mm [in]
S1.0 = 1.0 mm [in]
S1.5 = 1.5 mm [in]
S2.0 = 2.0 mm [in]

Coupling

00 = Cartridge only
L = 3/8 BSP