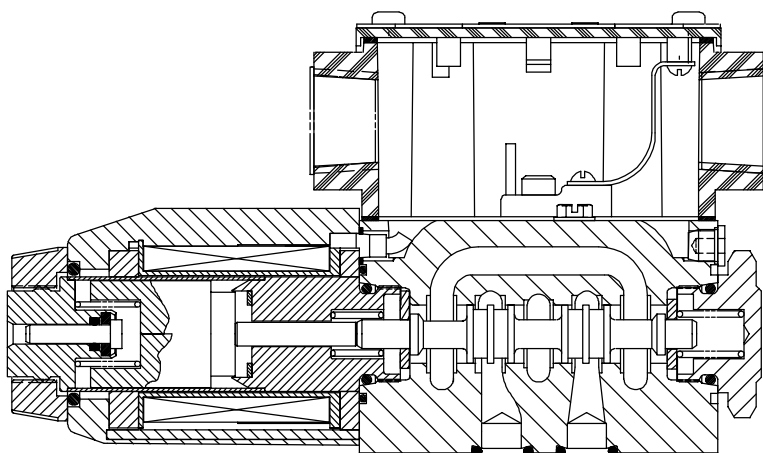






DG4V-3(S)-***(L)-*-(V)-M-(S*)***** (L)-* 60
Directional Control Valve
350 Bar (5075psi) P, A, & B Ports



DG4V-3(S)-*A(L)/B(L)-FJ/FW-60
Spring offset/Spring centered



Single solenoid valves, solenoid at "A" port end. Transient condition only.




Single solenoid valves, solenoid at "B" port end. Transient condition only.

MODEL	†KNOB	☐ CORE TUBE S/A
DG4V-3-AC	508113	508111
DG4V-3-DC	508113	508124
DG4V-3S-AC	694274	890246
DG4V-3S-DC	694272	694323


NOTE

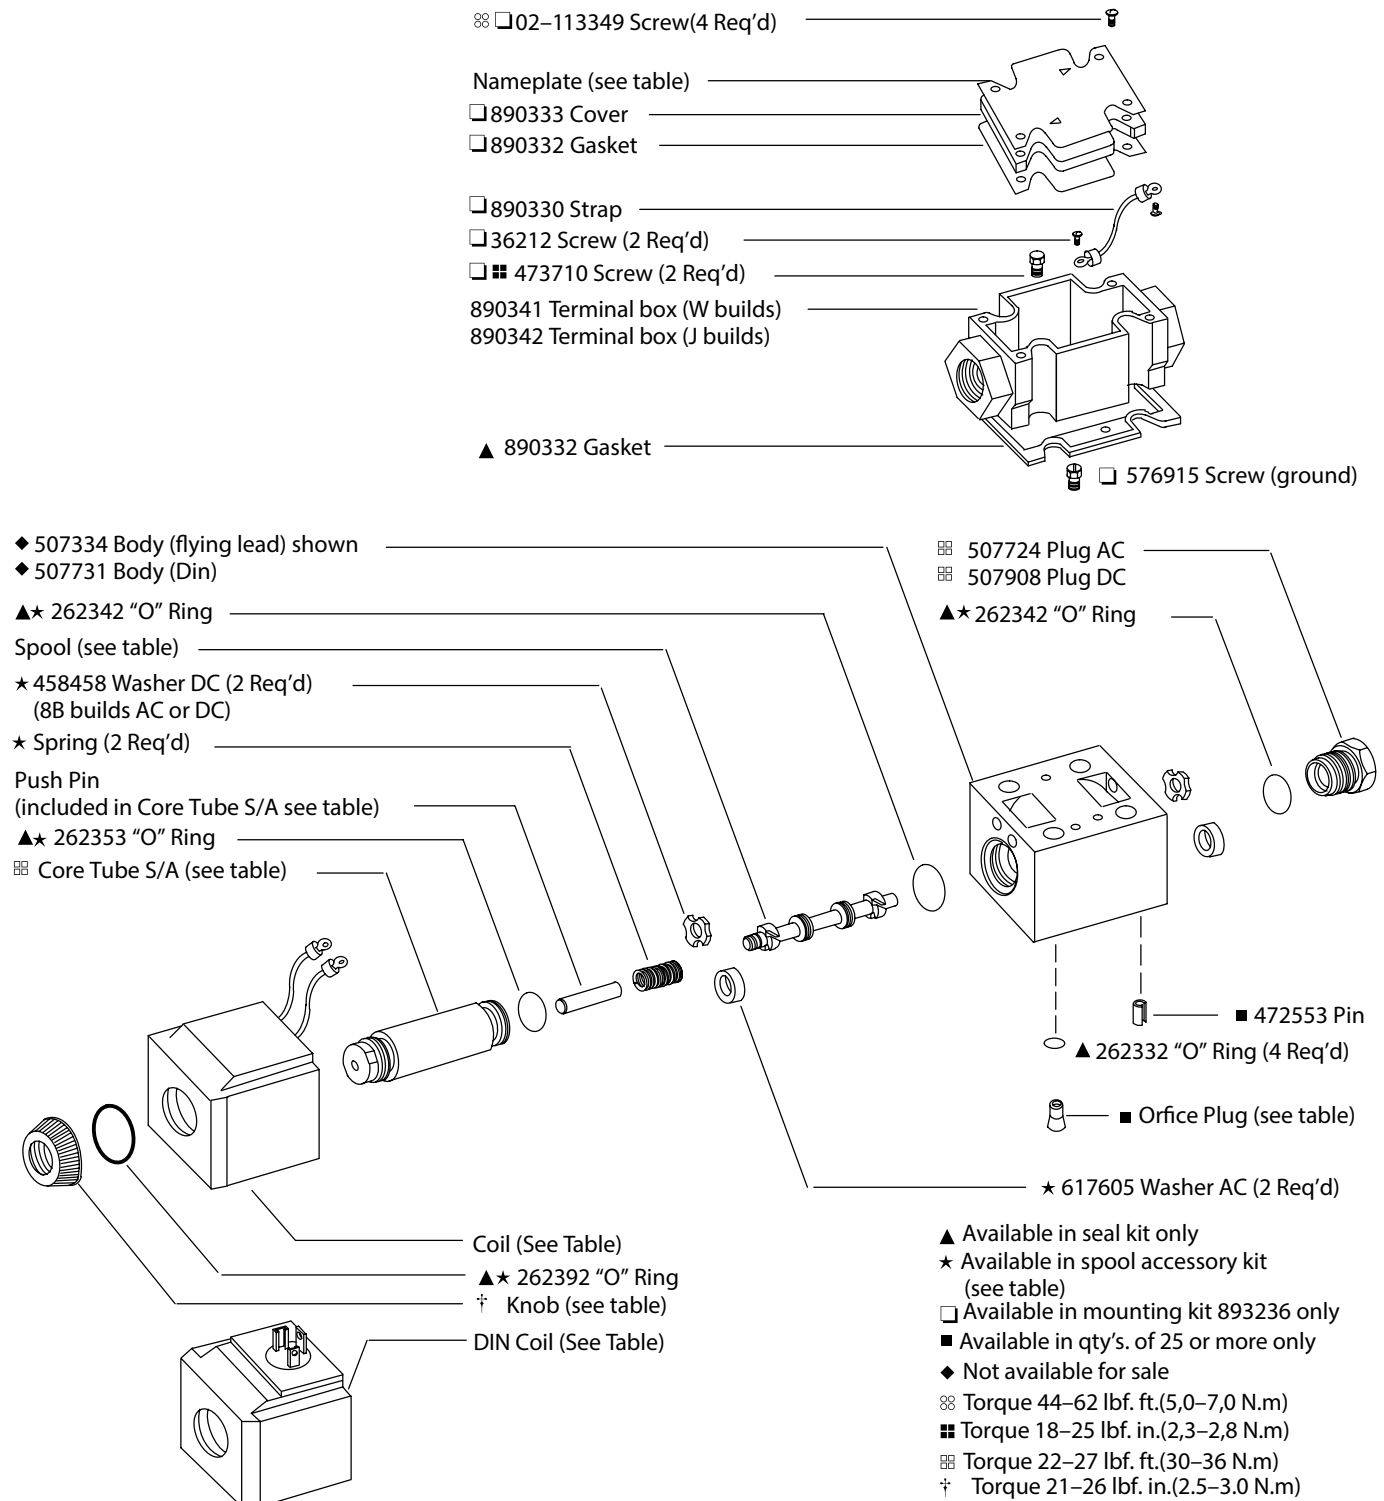Right hand assembly shown, for left hand assembly all parts reversed except body (& spool on "B" builds) and electrical connectors (where applicable).



MODEL	KNOB	CORE TUBE S/A
DG4V -3-AC	508113	508111
DG4V -3-DC	508113	508124
DG4V -3S-AC	694274	890246
DG4V -3S-DC	694272	694323

DG4V -3(S) -*C-FJ/FW -60 Spring centered



Double solenoid valves, spring centered
Transient condition only.

Nameplate
(see table)

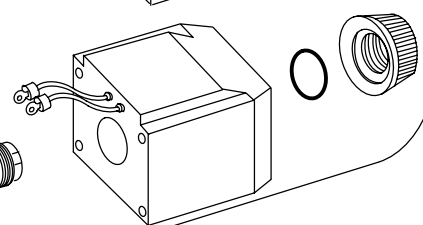
890333 Cover
890332 Gasket

890330 Strap
36212 Screw (2 Req 'd)

473710 Screw
(2 Req 'd)
890341 Terminal box (W builds)
890342 Terminal box (J builds)

890332 Gasket

DIN Coil (See Table)



507334 Body (flying lead) shown
507731 Body (Din)

576915 Screw (ground)

NOTE
Refer to other end of valve for common
part numbers.

472553 Roll Pin
262332 "O" Ring (4 Req 'd)
Orifice Plug (see table)


DIN Coil (See Table)
458458 Washer DC
(8C builds AC or DC)

262342 "O" Ring
Spool (see table)
617605 Washer AC
Spring
262353 "O" Ring
Push Pin (included in CoreTube S/A)
Core Tube S/A (see table)

Coil (See Table)
262392 "O" Ring
Knob (see table)


- ▲ Available in seal kit only
- ★ Available in spool accessory kit
(see table)
- Available in mounting kit 893236 only
- Available in qty 's. of 25 or more only
- ◆ Not available for sale
- ⊗ Torque 44 -62 lbf. ft.(5,0 -7,0 N.m)
- ⊞ Torque 18 -25 lbf. in.(2,3 -2,8 N.m)
- ⊠ Torque 22 -27 lbf. ft.(30 -36 N.m)
- † Torque 21 -26 lbf. in.(2.5 -3.0 N.m)

DG4V -3(S) -*N-FJ/FW -60
No spring detented



Double solenoid valves, two position, detented. Transient condition only.

MODEL	†KNOB	☒ CORE TUBE S/A
DG4V -3-AC	508113	508111
DG4V -3-DC	508113	508124
DG4V -3S-AC	694274	890246
DG4V -3S-DC	694272	694323

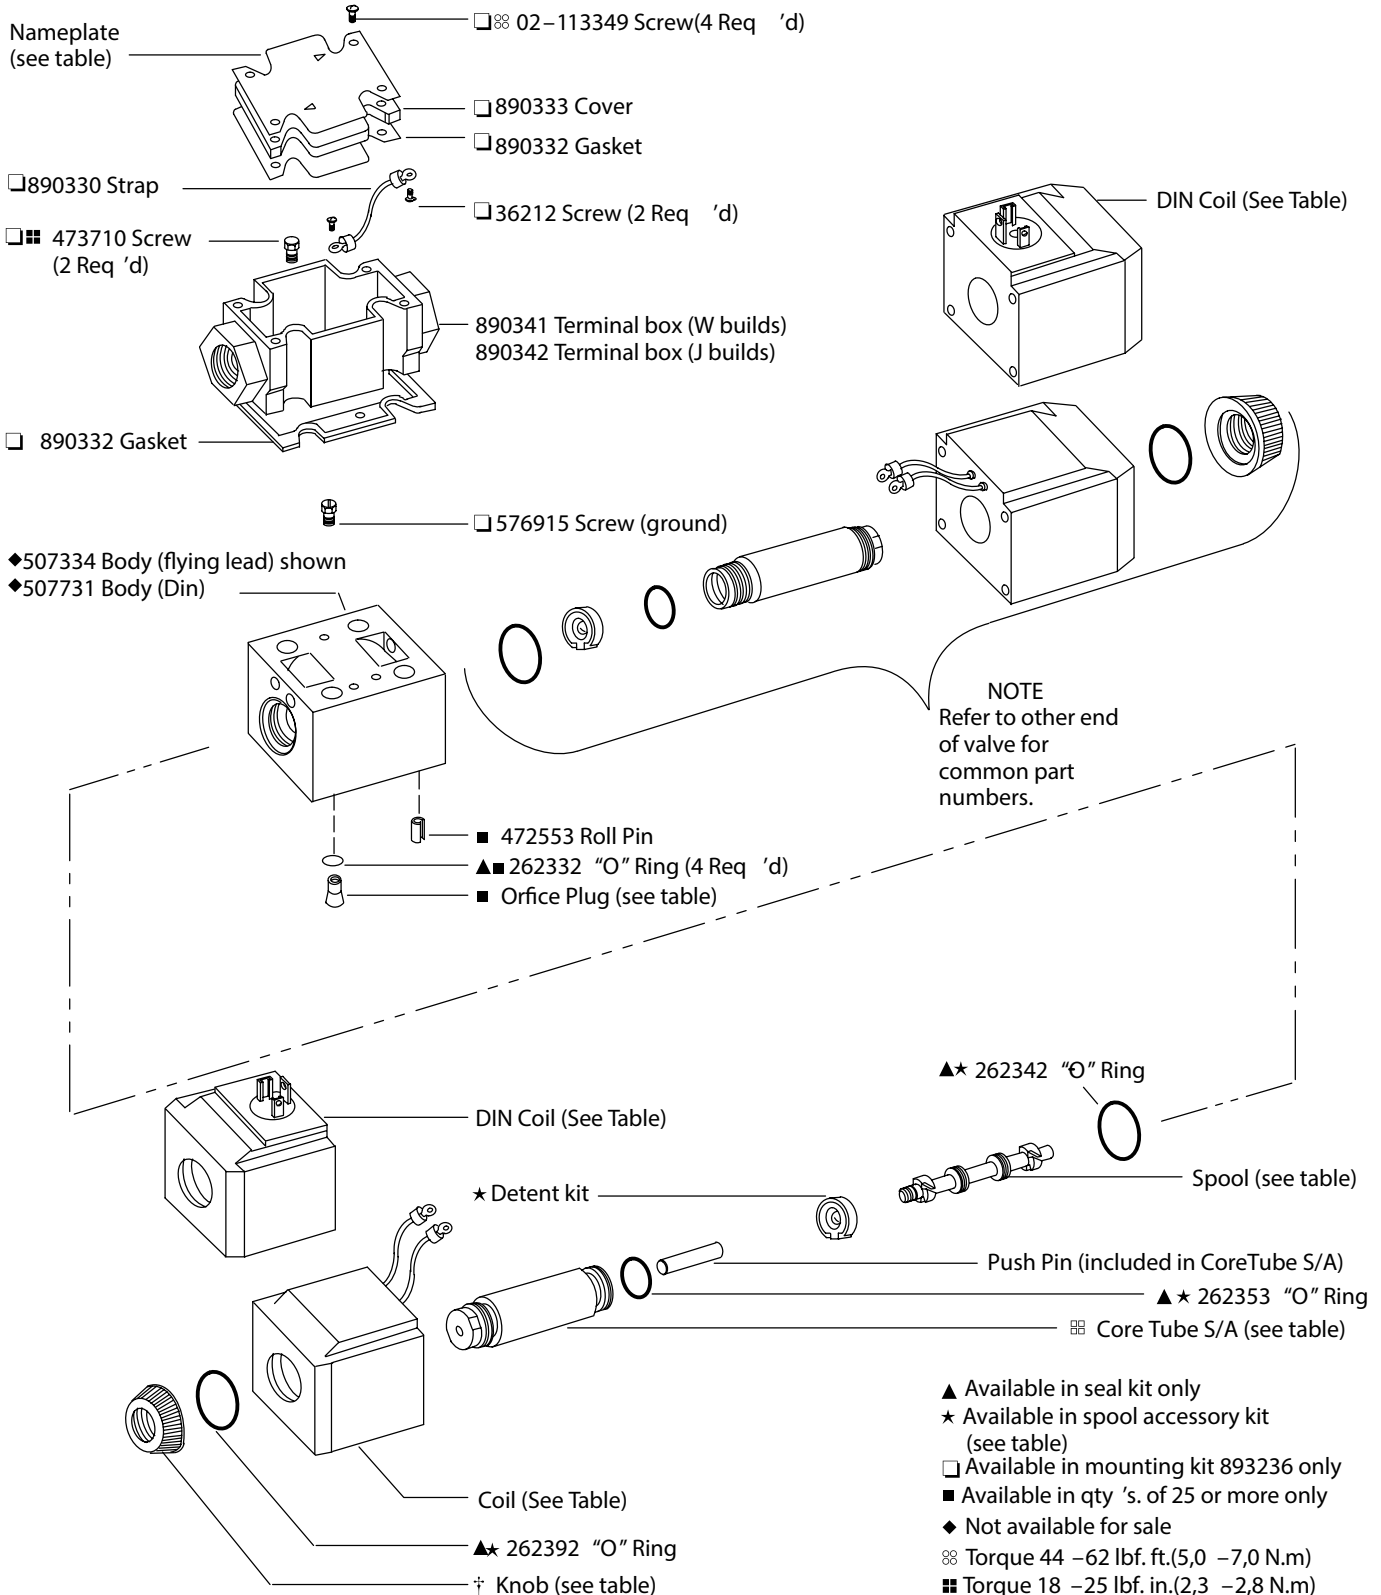

- ▲ Available in seal kit only
- ★ Available in spool accessory kit (see table)
- ☐ Available in mounting kit 893236 only
- Available in qty 's. of 25 or more only
- ◆ Not available for sale
- ☒ Torque 44 -62 lbf. ft.(5,0 -7,0 N.m)
- Torque 18 -25 lbf. in.(2,3 -2,8 N.m)
- ☒ Torque 22 -27 lbf. ft.(30 -36 N.m)
- † Torque 21 -26 lbf. in.(2.5 -3.0 N.m)

MODEL	† KNOB	⌘ CORE TUBE S/A
DG4V -3-AC	508113	508111
DG4V -3-DC	508113	508124
DG4V -3S -AC	694274	890246
DG4V -3S -DC	694272	694323


DG4V -3(S) -*A(L)/B(L) -S3/S4 -FJ/FW -60
Switch option

NOTE


Right hand assembly shown, for left hand assembly all parts reversed except body (& spool on "B" builds) and electrical connectors (where applicable).

LIMIT SWITCH ADJUSTMENT


Remove cover and energize solenoid. Loosen switch retaining screws and position switch to obtain complete circuit from common (C) thru normally open (NO) contacts. De -energize solenoid and make sure switch returns to normally open (NO) position before re -installing cover.



Single solenoid valves, solenoid at "A" port end. Transient condition only.



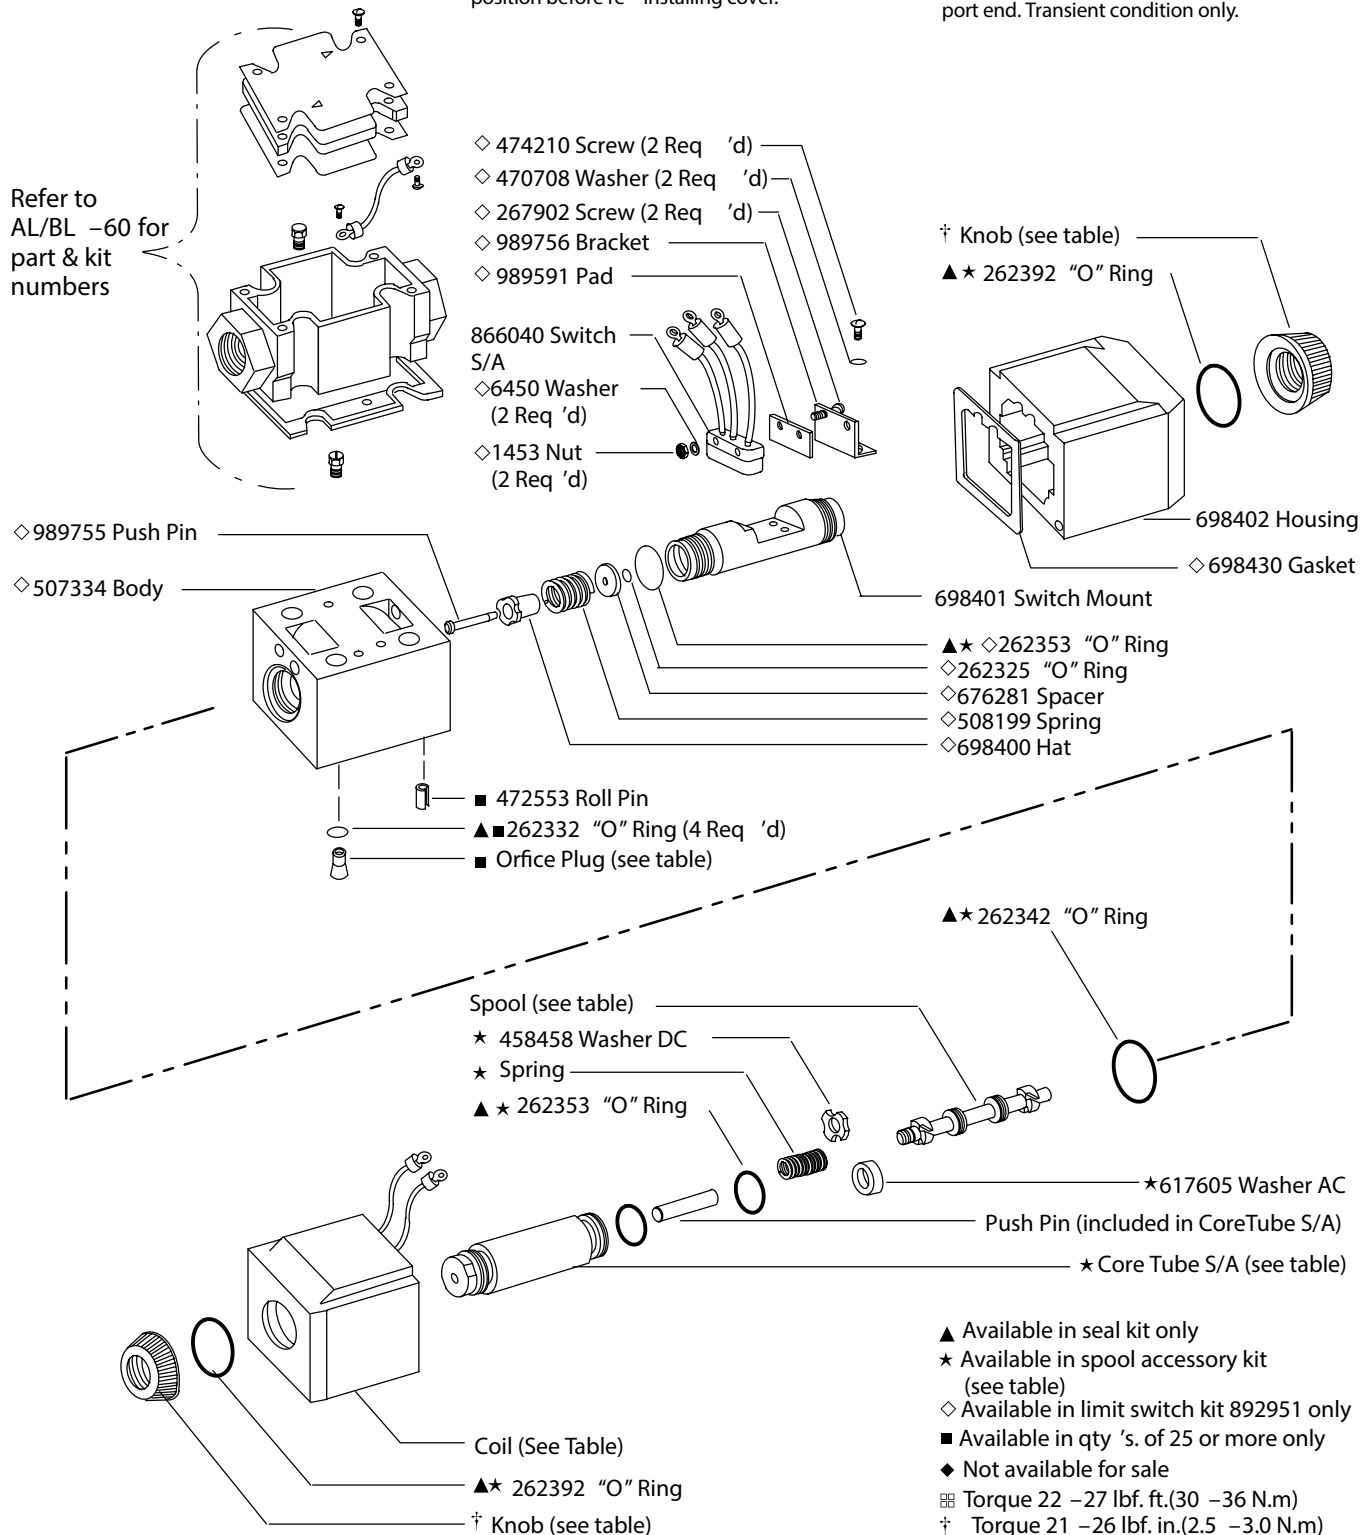Single solenoid valves, solenoid at "B" port end. Transient condition only.



- ▲ Available in seal kit only
- ★ Available in spool accessory kit (see table)
- ◇ Available in limit switch kit 892951 only
- Available in qty 's. of 25 or more only
- ◆ Not available for sale
- ⌘ Torque 22 -27 lbf. ft.(30 -36 N.m)
- † Torque 21 -26 lbf. in.(2.5 -3.0 N.m)

BLANK NAMEPLATES (DG4V-3S-60 STANDARD VALVE)

MODEL CODE	NAMEPLATE
DG4V-3S-***-**-M-U-**-60	694302
DG4V-3S-***-**-M-F/FP A3/FPA5-**-60	694386
DG4V-3S-***-**-M-FPB-**-60	694363
DG4V-3S-***-**-M-FPBL-**-60	694362

BLANK NAMEPLATES (DG4V-3-60 HIGH PERFORMANCE VALVE)

MODEL CODE	NAMEPLATE
DG4V-3-***-**-M-(S*)-U-*7-60	694303
DG4V-3-***-**-M-(S*)-U-*2/*6-60	694451
DG4V-3-***-**-M-(S*)-F/FP A3/FPA5-*7-60	694387
DG4V-3-***-**-M-FPB-**-60	865929
DG4V-3-***-**-M-FPBL-**-60	865930

NOTE

Use blank nameplates when converting to other valve configurations. Model number, assembly number, coil designator, tank pressure, and graphic symbol must be imprinted by person performing conversion.

RESTRICTOR PLUG

Install In P,T,A, Or B As Required

CODE	ORIFICE DIA.	PART #
03	0,30 (0.012)	694341
06	0,60 (0.024)	694342
08	0,80 (0.030)	694343
10	1,00 (0.040)	694344
13	1,30 (0.050)	694345
15	1,50 (0.060)	694346
20	2,00 (0.080)	694347
23	2,30 (0.090)	694348

CAUTION

There is no coil/coretube/part interchangeability between the -60 design and the previous design valves.

- Seal kits
- Seal kit 858996 for (F type coil)
- Seal kit 858995 for (U type coil)
- Seal kit 859049 for (MS spool position monitor switch)

Bolt spacer kit 893225 (spacers required when using -40 design bolts to mount a -60 design valve)

NOTE

For satisfactory service life of these components in industrial applications, use full flow filtration to provide fluid which meets ISO 4406 cleanliness code 20/16 for up to 200 bar (3000 psi) and 18/14 for above 200 bar (3000 psi) or cleaner.

Spool accessory kits

These kits contain the correct centering washers, centering springs, and seal kit to service or convert all valve build types. Some extra parts may exist after service or conversion (seals, spring, etc). Spool not included in kit and must be ordered separately.

DG4V-3S-AC/DC 893240

all spools, all builds, except detent builds

DG4V-3S-AC 893242

all spools, detent builds only

DG4V-3S-DC 893243

all spools, detent builds only

DG4V-3-AC 893238

all spools, all builds, except 8B/8C, or detent builds

DG4V-3-AC 893239

8B/8C builds only

DG4V-3-AC/DC 893242

all spools, detent builds only

DG4V-3-DC 893239

all spools, all builds, except detent

DG4V-3L-DC 893239


all spools, low power only

DG4V-3L-AC 893241

all spools, all builds, low power only, except 8B/8C

DG4V-3L-AC 893239

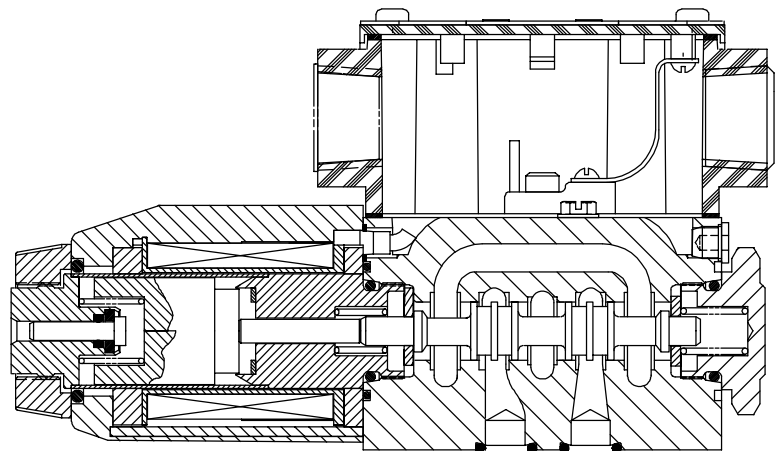
low power, 8B/8C only









































Construction of a typical single solenoid model



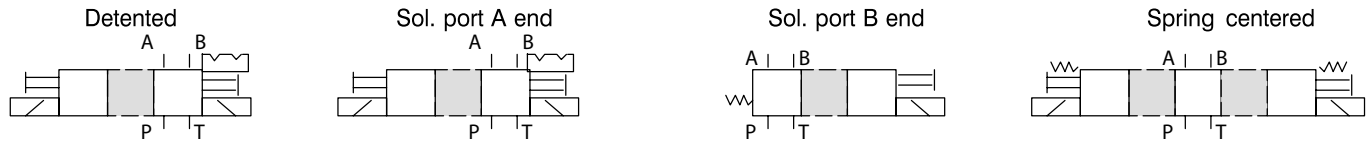Flow path during spool shift.



SPOOL/SPRING CODE	SPOOL #	SPOOL	SPOOL FUNCTIONAL GRAPHIC SYMBOLS			
♠ OA(L)	617498		OA		OAL	
OB(L)/OC	617121		OB		OBL	
					OC	
♠ 2A(L)	617120		2A		2AL	
2B(L)/2C	617118		2B		2BL	
					2C	
♠ 2N	617126		2N			
6B(L)/6C	617119		6B		6BL	
					6C	
7B(L)/7C	617125		7B		7BL	
					7C	
8B(L)/8C	458950		8B		8BL	
					8C	
♠ 22A(L)	617122		22A		22AL	
22B(L)/22C	617455		22B		22BL	
					22C	
24A(L)	617456		24A		24AL	
33B(L)/33C	617123		33B		33BL	
					33C	
34B(L)/34C	617128		34B		34BL	
					34C	
♠ 52BL/52C	617131				52BL	
					52C	
♠ 56BL/56C	617132				56BL	
					56C	
66B(L)/66C	698745		66B		66BL	
					66C	
♠ 521B	617131		521B			
♠ 561B	617132		561B			

SPOOL ASSEMBLY NOTES

Spool orientation unimportant except where indicated.

♠ These spools to be installed as shown in above table with left hand end towards "A" port (reverse 180° for all "AL" builds).

COILS (DG4V-3S-60 STANDARD VALVE)

CODE	VOLTS AC		FLYING LEAD COIL	DIN COIL
	50 HZ	60 HZ		
NN	24		02-111630	02-111255
N	24	24	02-111631	02-111541
K	48	48	02-111633	02-111542
A	110		02-101730	02-101725
EK		115	02-111635	02-111258
B	110	120	02-101731	02-101726
DN		220	02-111638	02-111545
D	220	240	02-101733	02-101728
EM		440	02-111643	02-111262

COILS (DG4V-3-60 HIGH PERFORMANCE VALVE)

CODE	VOLTS AC		FLYING LEAD COIL	DIN COIL
	50 HZ	60 HZ		
NN	24		865853	865835
N	24	24		
K	48	48		
A	110		508166	507825
EK		115	866458	866456
B	110	120	508169	507833
BL	110	120	698563	698562
DN		220		02-124586
D	220	240	508170	507834
EM		440	865836	865856

COILS (DG4V-3(S)-60 STANDARD/HIGH PERFORMANCE VALVE)

* Available For High Performance Valve Only




CODE	VOLTS DC		FLYING LEAD COIL	DIN COIL
G	12		508172	507847
GL*	12		508175	507855
H	24		508173	507848
HL*	24		508174	507852
DK	32		865863	865881
OJ	48		865864	865882
DM	80		865865	865883
DJ	98		865639	865637
P	110		865866	865884
DP	125		865867	865885
Z	180		865868	865886
EJ	196		865640	865638
S	220		865869	865887

CAUTION

Electrical power must be disconnected before removing/replacing terminal block, receptacle plug, indicator lights or limit switch.

DG4V-3(S)-FTJ/FTW-60
Terminal block.

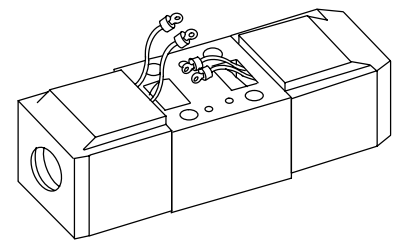☆ 890345 Terminal block S/A




**NOTE**

Refer to valve model drawing for balance of part numbers.

DG4V-3(S)-FTJL/FTWL-60
Terminal block with lights.




☆ 890345 Terminal block S/A

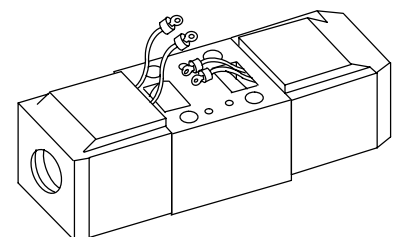⬢ Light kit (see table)




**NOTE**

Refer to valve model drawing for balance of part numbers.

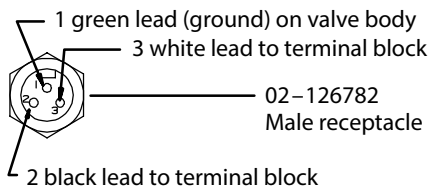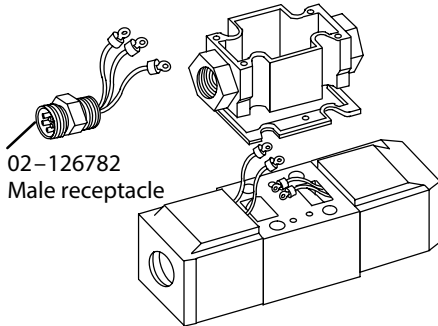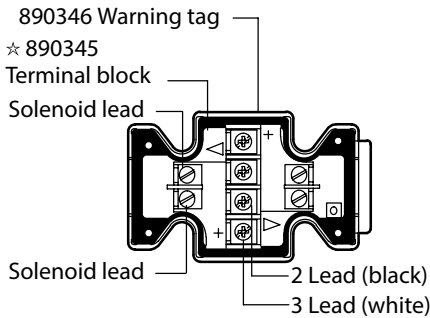DG4V -3(S) -A/B -FPA3W -60
Terminal block with male receptacle



DG4V -3(S) -A/B -FPA5W -60
Terminal block with male receptacle

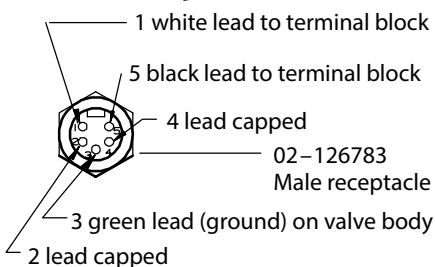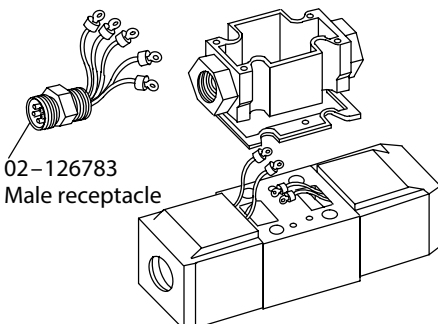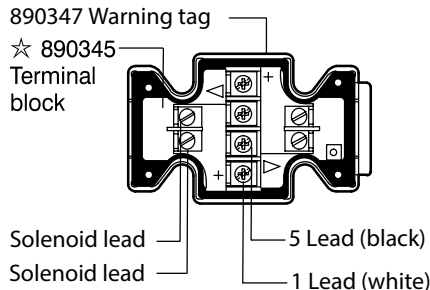

Accessory kits

- **Terminal box accessory kit 893236** (contains all parts for mounting box)
- ☆ **Terminal strip kit 890345** (includes all attaching hardware).
- ◇ **Limit switch kit 892951** (contains all minor parts for servicing limit switch).

NOTE

Light kits cannot be installed without a terminal strip.

⚡ Light kits (terminal strip not included)

VOLTAGE	KIT #
12VDC	893231
24 VDC	893232
98 VDC	893233
120 VAC	893234
240 VAC	893235

For use on valves with terminal strip installed.

⚡ Light kits (terminal strip included)

VOLTAGE	KIT #
12VDC	893226
24 VDC	893227
98 VDC	893228
120 VAC	893229
240 VAC	893230

For use on valves without terminal strip installed).




NOTE

Refer to valve model drawing for balance of part numbers.




CAUTION

Electrical power must be disconnected before removing/replacing terminal block, receptacle plug, indicator lights or limit switch.

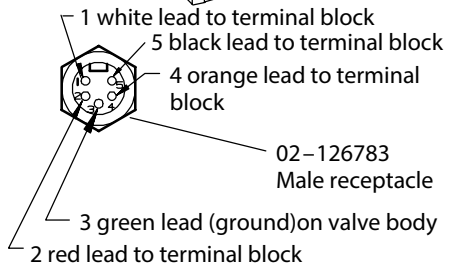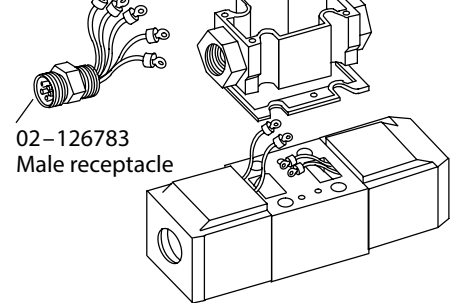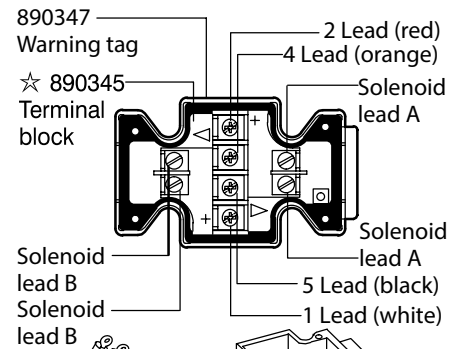
DG4V -3(S) -C/N -FPA5W -60
Terminal block with male receptacle




DG4V -3(S) -A/B -S3/S4 -FPA5W -60
Terminal block, male recept. & switch

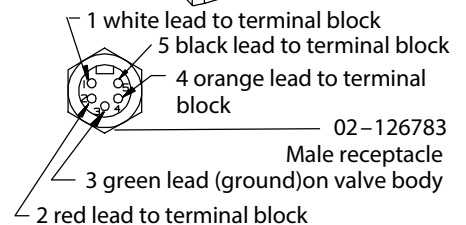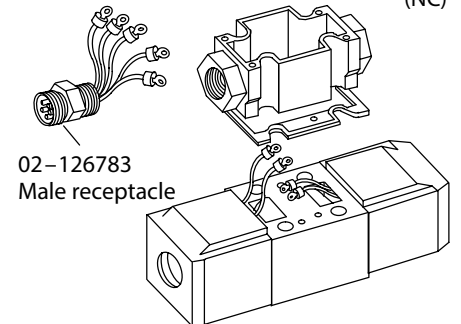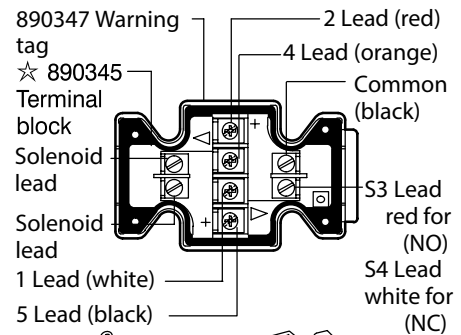

DG4V -3(S) -* -FPB -60
Instaplug male/female receptacle

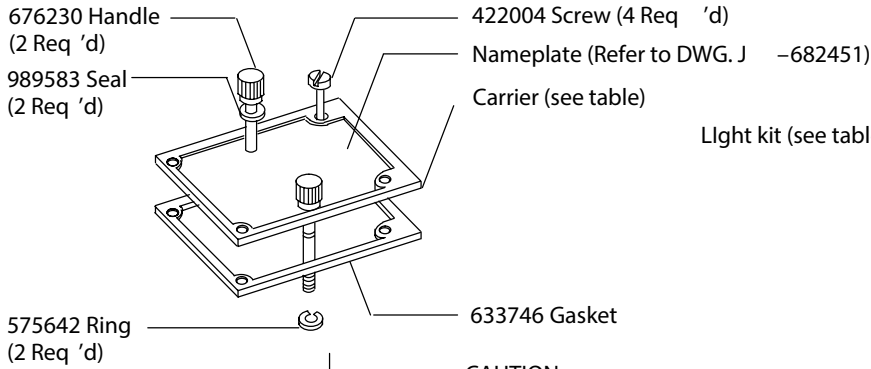


DG4V -3(S) -* -FPBL -60
Instaplug male/female receptacle
with lights

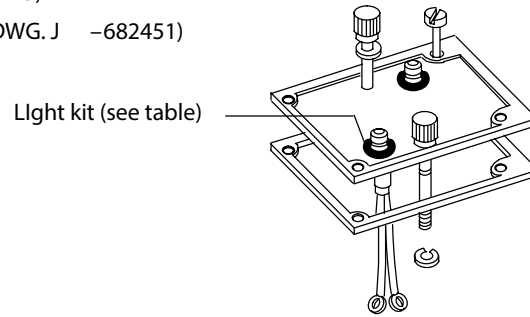

CAUTION

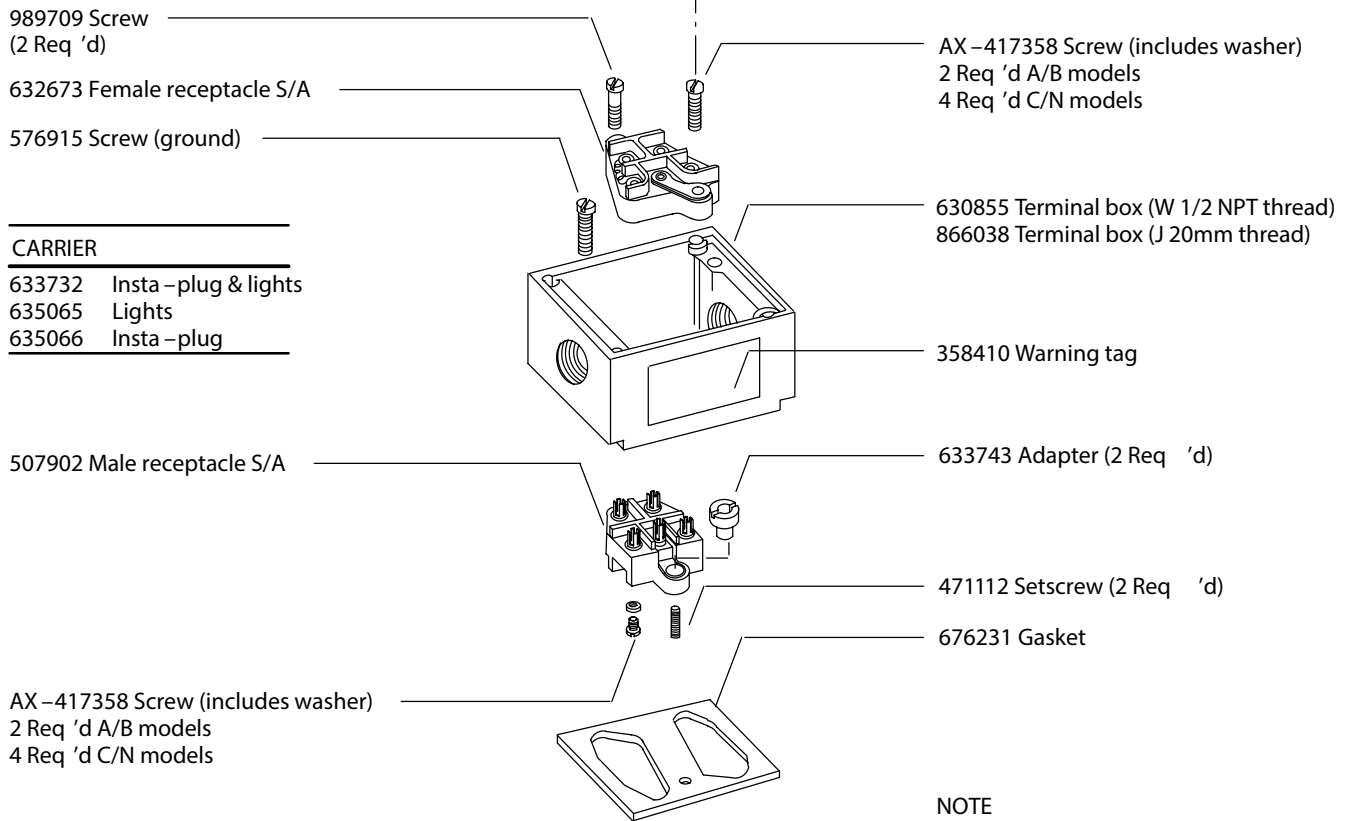Electrical power must be disconnected before removing/replacing terminal block, receptacle plug, indicator lights or limit switch.



CARRIER


633732	Insta-plug & lights
635065	Lights
635066	Insta-plug

AX -417358 Screw (includes washer)
2 Req 'd A/B models
4 Req 'd C/N models

VOLTAGE RANGE	LIGHT KIT
12V AC/DC	926499
24V AC/DC	926431
115V AC/DC	926432
230V AC/DC	926458

NOTE

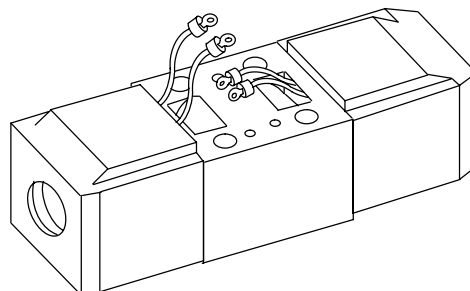Insta-plug part numbers and assembly/disassembly sequence are the same for single and double solenoid valves.



(PB) Insta-plug kit 893237
This kit is required to add the "PB" option to both standard and high performance valves. Kit contains all parts to convert a standard terminal box equipped valve to the Insta-plug (PB) version.

Model Code

DG4V-3(S) - * (L) - * - (V) M- (S*) *** ** (L) - * 60 - (EN*) - (P*-A*-B*-T*)**

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17

1 D – Directional control valve
G – Subplate mounted
4 – Solenoid operated
V – 350 Bar (5075 psi) P, A, & B ports

2 Standard/High performance
3 – High performance 80 l/min (21 pm) at 350 bar (5075 psi)
3S – Standard performance 40 l/min (10.5 gpm) at 350 bar (5075 psi)

3 Spool type (see table)

4 Spool/Spring arrangement
A – Spring offset, single solenoid
AL – Same as A but left hand build
B – Spring centered, single solenoid
BL – Same as B but left hand build
C – Spring centered
F – Spring offset, shift to center
N – No spring detented

5 Manual override options
Blank – Plain override solenoid only
H – Waterproof override solenoid and only
H2 – Waterproof override both ends of single solenoid
P2 – Plain override both ends of single solenoid
Y – Lockable manual override solenoid ends only
Z – No overrides in either end

6 Solenoid energisation identity
Blank – Standard arrangement for ANSI B93 9 (energise solenoid A for flow A to P port)
V – Solenoid A at port A end and/or solenoid B at port B end, regardless of spool type.
 (All 8 spool valves are V code)

7 Flag
 Electrical options & features

8 Spool indicator switch
 Available on high performance models, DG4V-3, only.
 Omit when not required.

For DG4V-3-*A(L)-(Z)-(V)M-S*-U valves having type 2 and 22 spools with proximity type DC switch:
S1 – Switch, normally open.
S2 – Switch, normally closed.
 For
 DG4V-3-*A(L)-(Z)-(V)M-S*-FP A5W valves having mechanical type AC switch, wired to 5 pin receptacle:
S3 – Switch, wired normally open.
S4 – Switch, wired normally closed.
 For
 DG4V-3-*A(L)-(Z)-(V)M-S5-F(T)W/J valves having mechanical type AA switch:
S5 – Switch, free leads

9 Coil type
U – ISO 4400
F – Flying lead
SP1 – Single 6,3 series spade to IEC 760
SP2 – Dual 6,3 series spade to IEC 760
X1 – Flameproof solenoids
TP EEx-d-11B-T4
X2 – Hazardous location solenoids to meet UL & CSA approval
X3 – Special protection solenoids to BASEEFA standard SFA009:1972: protection class Ex-S-11-T4

10 Electrical connections (F type coil only) omit if not required

T – Wired terminal block
PA – Instaplug male receptacle only
PB – Instaplug male & female receptacle
PA3 – Three pin connector
PA5 – Five pin connector

11 Housing (F type coils only)
W – 1/2 NPT thread wiring housing
J – 20 mm thread wiring housing

12 Solenoid indicator lights (omit if not required)
 Not available on PA, U, SP1, & SP2 builds

13 Coil identification (see table)
 (*L coils not available on DG4V-3S builds)

14 Tank pressure rating
 Standard performance DG4V-3S
5 – 100 Bar (72 psi)
 High performance DG4V-3
2 – 10 Bar (145 psi)
4 – 70 Bar (1015 psi)
6 – 160 Bar (2320 psi) AC valves
7 – 210 Bar (3045 psi) DC valves

15 Design

16 Special modifications (omit if not required)

17 Port orifice plugs (see table) omit if not required

Products we offer:

- Cartridge valves
- DCV directional control valves
- Electric converters
- Electric machines
- Electric motors
- Gear motors
- Gear pumps
- Hydraulic integrated circuits (HICs)
- Hydrostatic motors
- Hydrostatic pumps
- Orbital motors
- PLUS+1® controllers
- PLUS+1® displays
- PLUS+1® joysticks and pedals
- PLUS+1® operator interfaces
- PLUS+1® sensors
- PLUS+1® software
- PLUS+1® software services, support and training
- Position controls and sensors
- PVG proportional valves
- Steering components and systems
- Telematics

Danfoss Power Solutions is a global manufacturer and supplier of high-quality hydraulic and electric components. We specialize in providing state-of-the-art technology and solutions that excel in the harsh operating conditions of the mobile off-highway market as well as the marine sector. Building on our extensive applications expertise, we work closely with you to ensure exceptional performance for a broad range of applications. We help you and other customers around the world speed up system development, reduce costs and bring vehicles and vessels to market faster.

Danfoss Power Solutions – your strongest partner in mobile hydraulics and mobile electrification.

Go to www.danfoss.com for further product information.

We offer you expert worldwide support for ensuring the best possible solutions for outstanding performance. And with an extensive network of Global Service Partners, we also provide you with comprehensive global service for all of our components.

Local address:

Hydro-Gear

www.hydro-gear.com

Daikin-Sauer-Danfoss

www.daikin-sauer-danfoss.com

**Danfoss
Power Solutions (US) Company**
2800 East 13th Street
Ames, IA 50010, USA
Phone: +1 515 239 6000

**Danfoss
Power Solutions GmbH & Co. OHG**
Krokamp 35
D-24539 Neumünster, Germany
Phone: +49 4321 871 0

**Danfoss
Power Solutions ApS**
Nordborgvej 81
DK-6430 Nordborg, Denmark
Phone: +45 7488 2222

**Danfoss
Power Solutions Trading
(Shanghai) Co., Ltd.**
Building #22, No. 1000 Jin Hai Rd
Jin Qiao, Pudong New District
Shanghai, China 201206
Phone: +86 21 2080 6201

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed.
All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.