




Remote Control Pressure Relief Valves

CGR-02, 21 Design

Typical Section

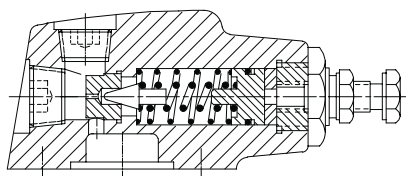

Basic Characteristics


Operating pressures . . . Up to 210 bar
 (3000 psi)
 Flow rating . . . 4,1 L/min (15.5 USgpm)
 Mounting Gasket

General Description

This valve is suitable as a remote control device for Vickers balanced piston type relief valves, e.g. models ECG-06/10). It is not intended to be used as a relief valve by itself.


The valve can provide adjustment of a system pressure from a convenient or remote location.

Functional Symbol



Model Code

F3 - CGR - 02 - * - (K) - 21



1 Special seals

See "Hydraulic Fluids" section

2 Pressure relief valve

For pilot and remote control

3 Nominal size

02 = 1/4 nominal bore pipe size

4 Pressure adjustment range

B = 5-69 bar (75-1000 psi)
 C = 5-138 bar (75-2000 psi)
 F = 5-210 bar (75-3000 psi)

5 Handwheel adjustment

Omit for hex. head screw version

6 Design number

Subject to change.
 Installation dimensions remain as shown for designs 20-29 inclusive.

clockwise to decrease pressure.
 Re-tighten locknut after setting the pressure.

The outlet port should be piped directly to tank at atmospheric pressure. Any pressure at the drain port is additive to the pressure setting of the valve.

Hydraulic Fluids

All valves can be used with antiwear hydraulic oils, water-in-oil emulsions and water glycols.

Add prefix "F3" to model designation when phosphate ester (except alkyl-based) or chlorinated hydrocarbons are to be used.

Viscosities can range between 860 and 13 cSt (4000 and 70 SUS) but the recommended running range is from 54 to 13 cSt (245 to 70 SUS).

For further information about fluids see leaflet 694.

Temperature Limits

Ambient

Min. -20 C (-4 F)
 Max. +70 C (158 F)

Fluid Temperature

	Petroleum oil	Water-containing
Min.	-20 C (-4 F)	+10 C (50 F)
Max.*	+80 C (+176 F)	+54 C (129 F)

* To obtain optimum service life from both fluid and hydraulic system 65 C (150 F) normally is the maximum temperature except for water-containing fluids.

For synthetic fluids consult manufacturer or Vickers representative where limits are outside those for petroleum use. Whatever the actual temperature range, ensure that viscosities stay within the limits specified in the "Hydraulic Fluids" section.

Operating Data

Maximum Pressure

70, 140 or 210 bar (1000, 2000 or 3000 psi) according to adjustment range. See "Model Code" above.

Maximum Flow Rate

All models . . . 4,1 L/min (15.5 USgpm)

Control Data

The pressure is adjusted by slackening the locknut and turning the adjusting device in a clockwise direction to increase pressure and counter-

Contamination Control Requirements


Recommendations on contamination control methods and the selection of products to control fluid condition are included in Vickers publication 561,

"Vickers Guide to Systemic Contamination Control". The book also includes information on the Vickers concept of "ProActive Maintenance". The following recommendations are based on

ISO cleanliness levels at 2 μ m, 5 μ m and 15 μ m. For products in this catalog the recommended levels are:

Up to 210 bar (3000 psi) 19/17/14

Installation Dimensions – mm (inches)

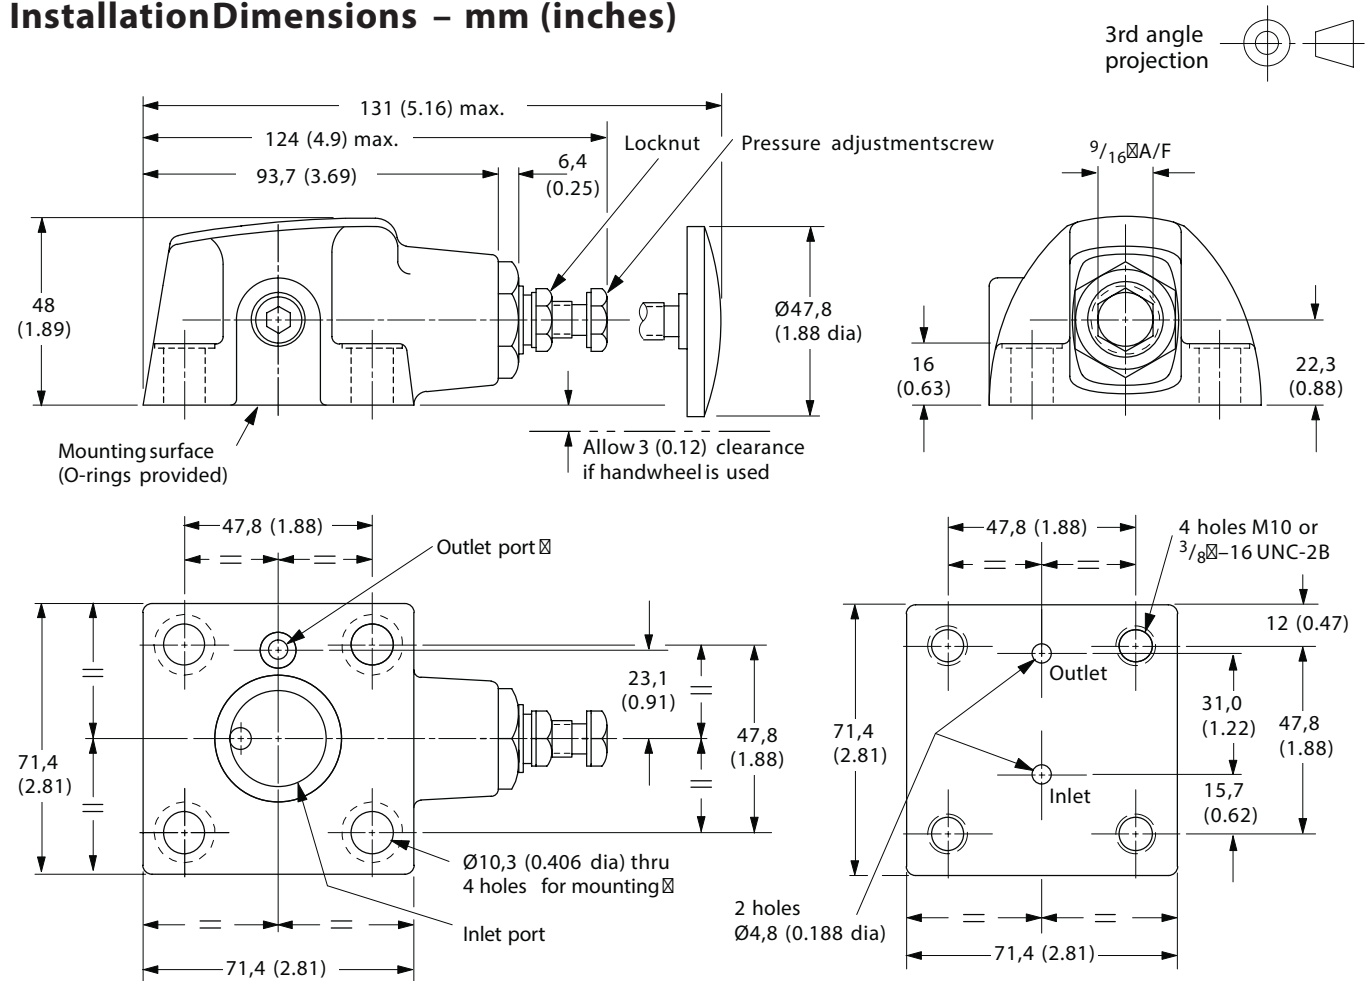

☒ Connect outlet port directly to tank.

Any pressure at this port must be added to relief valve pressure setting.

☒ Mounting bolt torque (M10 or 3/8 dia bolts) is 3,4 Nm (30 lb ft). Mounting bolts should be SAE grade 7 or better.

Mounting Pad

The pad must be flat within 0,013 mm (0.0005 in) and smooth within 1,6 μ m (63 microinch).

Mass

All models 1,3 kg (2.9 lb)

Ordering Procedure

When ordering a unit please specify the complete model designation(s). See "Model Code".

Mounting Attitude

Optional.

Products we offer:

- Cartridge valves
- DCV directional control valves
- Electric converters
- Electric machines
- Electric motors
- Gear motors
- Gear pumps
- Hydraulic integrated circuits (HICs)
- Hydrostatic motors
- Hydrostatic pumps
- Orbital motors
- PLUS+1® controllers
- PLUS+1® displays
- PLUS+1® joysticks and pedals
- PLUS+1® operator interfaces
- PLUS+1® sensors
- PLUS+1® software
- PLUS+1® software services, support and training
- Position controls and sensors
- PVG proportional valves
- Steering components and systems
- Telematics

Danfoss Power Solutions is a global manufacturer and supplier of high-quality hydraulic and electric components. We specialize in providing state-of-the-art technology and solutions that excel in the harsh operating conditions of the mobile off-highway market as well as the marine sector. Building on our extensive applications expertise, we work closely with you to ensure exceptional performance for a broad range of applications. We help you and other customers around the world speed up system development, reduce costs and bring vehicles and vessels to market faster.

Danfoss Power Solutions – your strongest partner in mobile hydraulics and mobile electrification.

Go to www.danfoss.com for further product information.

We offer you expert worldwide support for ensuring the best possible solutions for outstanding performance. And with an extensive network of Global Service Partners, we also provide you with comprehensive global service for all of our components.

Local address:

Hydro-Gear

www.hydro-gear.com

Daikin-Sauer-Danfoss

www.daikin-sauer-danfoss.com

**Danfoss
Power Solutions (US) Company**
2800 East 13th Street
Ames, IA 50010, USA
Phone: +1 515 239 6000

**Danfoss
Power Solutions GmbH & Co. OHG**
Krokamp 35
D-24539 Neumünster, Germany
Phone: +49 4321 871 0

**Danfoss
Power Solutions ApS**
Nordborgvej 81
DK-6430 Nordborg, Denmark
Phone: +45 7488 2222

**Danfoss
Power Solutions Trading
(Shanghai) Co., Ltd.**
Building #22, No. 1000 Jin Hai Rd
Jin Qiao, Pudong New District
Shanghai, China 201206
Phone: +86 21 2080 6201