




Unloading Relief Valves


EURG1/2-06/10, 13 Design and EURT1/2-06/10, 12 Design

Sectional Illustrations

EURG*

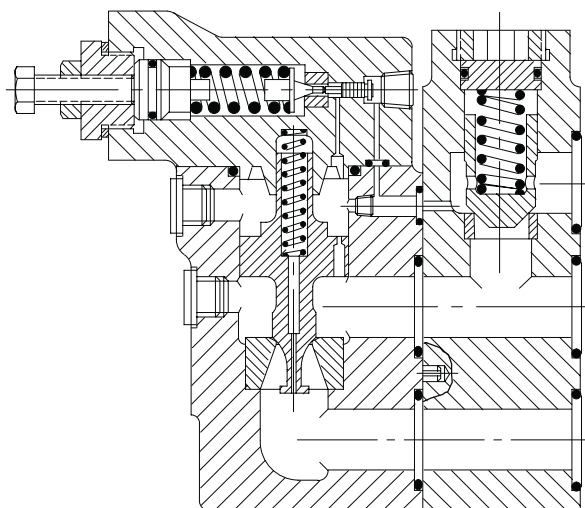

EURT*

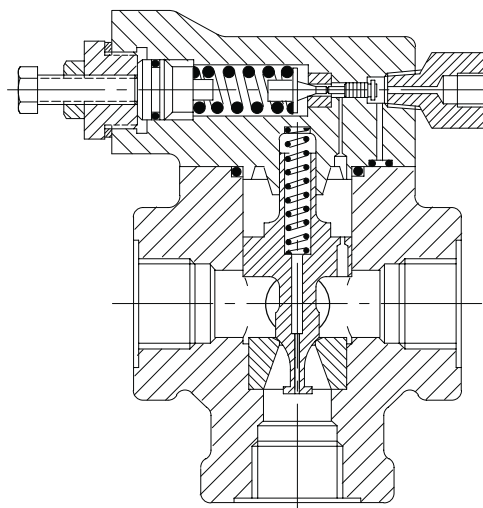

Basic Characteristics

Mounting . . . Pipe or subplate mounting
Unloading pressure Up to 210 bar
(3000 psi)
Rated flow Up to 246 L/min
(65 USgpm)
Method of actuation . . . Internally piloted

General Description

Unloading relief valves are primarily used in hydraulic circuits incorporating accumulators where a pressure regulator is required to automatically unload the pump when the pressure reaches the pre-adjusted pressure setting of the valve.


When the pressure has dropped to approximately 85% of the valve setting the valve spool closes, thus diverting the pump delivery to the accumulator.

On the EURG models an integral check Valve prevents return flow from the accumulator through the unloading valve; for the EURT model to provide this function a separate right angle check valve, model C2-815 (3/4") or C2-825 (1 1/4") must be provided.


These valves may also be used with a double pump to deliver a large volume of oil to the system at low pressure and a small volume at high pressure, serving the same function as a separate unloading valve and check valve.

Functional Symbols


EURG1




EURG2



EURT1




EURT2




Applications

1. Single pump/accumulator system

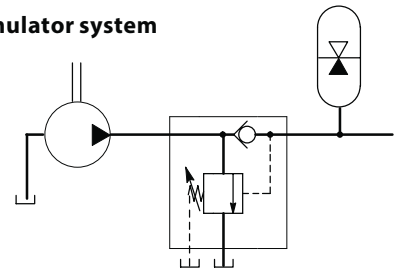

2. Double pump system

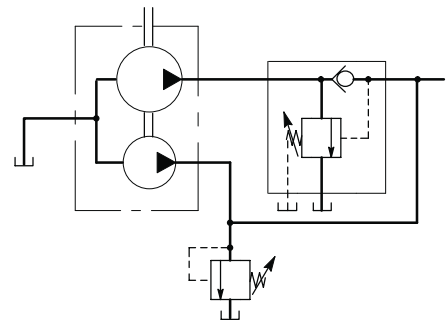


Note that the EURG1 model shown in both systems can be replaced by the EURG2 or an EURT* plus the external check valve

Model Codes


Valves

(F3)-EUR * * - ** - * (V)- ** **



Subplate

EURG1M - ** - 20 - R



1 Seals for phosphate ester fluids
(See also the "Hydraulic Fluids" section)
Omit if not required

2 Mounting method
G = Subplate mounted
T = Pipeline mounted

3 Drain
1 = External drain
2 = Internal drain

4 Nominal port size
06 = $\frac{3}{4}$ "
10 = $1\frac{1}{4}$ "

5 Pressure adjustment range
B = 25 - 69 bar (350 - 1000 psi)
C = 35 - 138 bar (500 - 2000 psi)
F = 104 - 210 bar (1500 - 3000 psi)

6 High venting spring
EURG models only
Omit if not required

7 Design number
12 = EURT model
13 = EURG model
Design numbers are subject to change.
Installation dimensions remain the same for design numbers 10 to 19 inclusive.

8 Port tappings/fixing bolts
UB = G (BSPF) porttappings (EURT models)
UG = Accept metric or inch fixing bolts (EURG models)

1 Nominal port size
06 = $\frac{3}{4}$ "
10 = $1\frac{1}{4}$ "

2 Design number, 20 series
Subject to change. Installation dimensions remain the same for design numbers 20 to 29 inclusive.

Metric Fixing Bolt Kits
(EURG valves)
BKUR-06-682M for EURG-06 valves
E-BKUR-10-683M (Assy. no. 460852) for EURG-10 valves

Operating Data

Max. Pressures

Pressure inlet and system ports . . Up to 210 bar (3000 psi) dependent on model

Tank ports

EUR*1 models Up to 85% of inlet pressure

EUR*2 models Up to 5% of inlet pressure

Pilot pressure port

EURT* models Up to 210 bar (3000 psi) dependent on model

Drain port

EUR*1 models Drain must be connected to tank through a surge free line so there will be no back Pressure at this port.

Failure to connect the drain can result in infinite system pressures and machine damage.

EURT2 models are internally drained and this port is not used.

Pressure Adjustment Range

See "Model Code".

Flow Data

Rated flow, L/min (USgpm)

EURT*-06 75 (284)

EURG*-06 95 (360)

EURT*-10 190 (720)

EURG*-10 246 (930)

Hydraulic Fluids

All valves can be used with antiwear hydraulic oils, water-in-oil emulsions and water-glycols. Add prefix "F3" to model designation when phosphate ester (not alkyl-based) or chlorinated hydrocarbons are to be used.

The extreme operating viscosity range is from 860 to 13 cSt (4000 to 70 SUS), but the recommended running range is 54 to 13 cSt (245 to 70 SUS).

For further information about fluids see leaflet 694.

Temperature Limits

Ambient

Min. -20°C (-4°F)

Max. +70°C (+158°F)

Fluid Temperature

	Petroleum oil	Water-containing
Min.	-20°C (-4°F)	+10°C (50°F)
Max.*	+80°C (176°F)	+54°C (130°F)

* To obtain optimum service life from both fluid and hydraulic system 65°C (150°F) normally is the maximum temperature except for water-containing fluids.

For synthetic fluids consult manufacturer or Vickers representative where limits are outside those for petroleum use.

Whatever the actual temperature range, Ensure that viscosities stay within the limits specified in the "Hydraulic Fluids" section.


Contamination Control Requirements

Recommendations on contamination control methods and the selection of products to control fluid condition are included in Vickers publication 9132 or 561, "Vickers Guide to Systemic Contamination Control". The book also includes information on the Vickers concept of "ProActive Maintenance". The following recommendations are based on ISO cleanliness levels at 2 µm, 5 µm and 15 µm. For products in this catalog the recommended levels are:

Up to 210 bar (3000 psi) **19/17/14**

Installation Dimensions in mm (inches)

EURG*-06/10


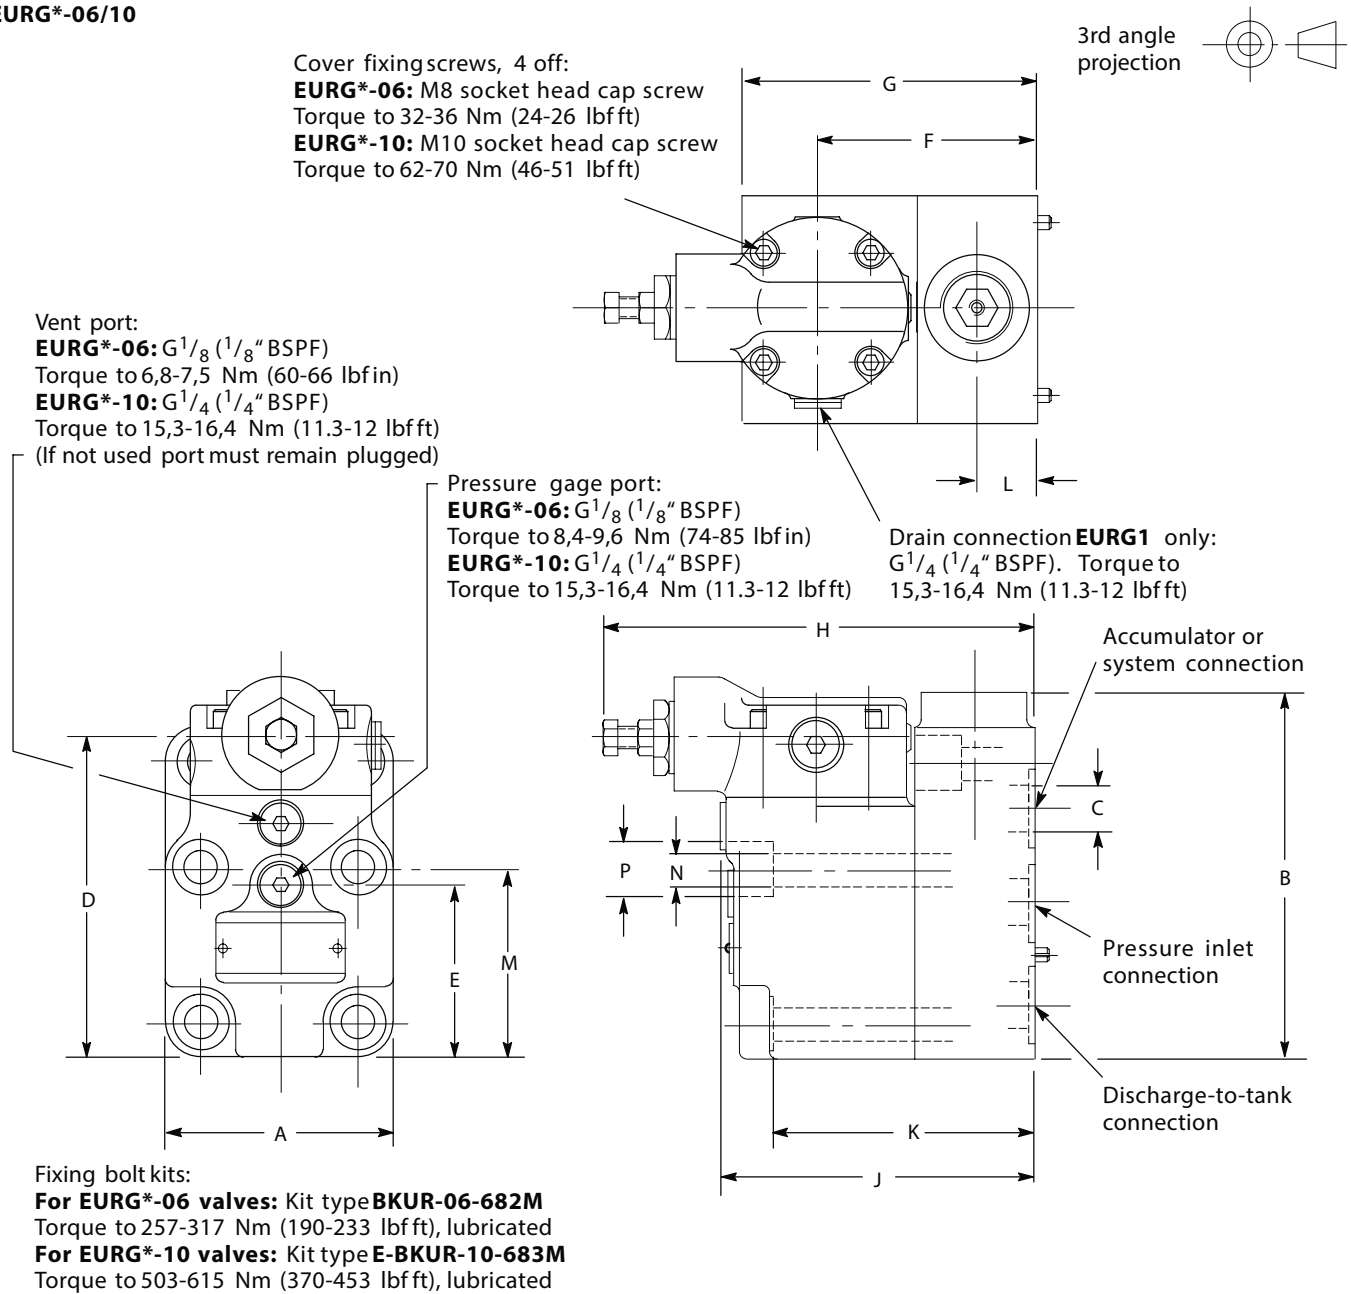


For mounting subplates see next page.

Model	A	B	C	D	E	F	G	H	J	K	L	M	N	P
EURG*-06	101,6 (4.0)	160,3 (6.31)	23 (0.91)	139,7 (5.5)	76,2 (3.0)	92,2 (3.63)	124,0 (4.88)	181,0 (7.13)	134,1 (5.28)	108,0 (4.25)	25,4 (1.0)	82,8 (3.26)	17 (0.67)	26 (1.02)
EURG*-10	120,7 (4.75)	217,5 (8.56)	28,6 (1.13)	179,3 (7.06)	95,3 (3.75)	117,6 (4.63)	157,2 (6.19)	206,3 (8.12)	167,6 (6.6)	138,1 (5.44)	33,3 (1.31)	108 (4.25)	21 (0.83)	32 (1.26)

Subplate for EURG*-06/10 Valves

3rd angle
projection

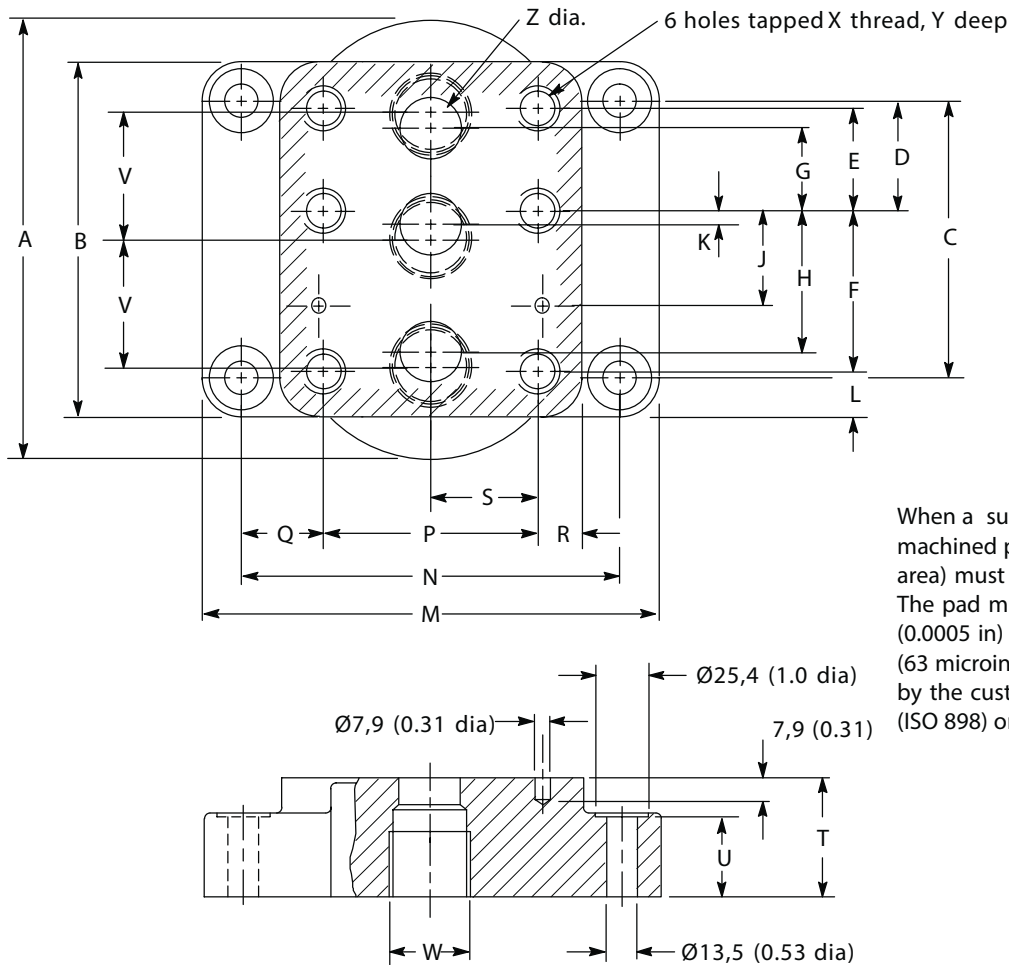



When a subplate is not used, a machined pad (as indicated by shaded area) must be provided for mounting. The pad must be flat within 0,013 mm (0.0005 in) and smooth within 1,6 µm (63 microinch). Mounting bolts provided by the customer should be Class 12,9 (ISO 898) or better.

Model	A	B	C	D	E	F	G	H	J	K	L	M
EURG1M-06	–	145 (5.71)	113 (4.38)	46 (1.81)	46 (1.81)	66,7 (2.63)	33,3 (1.31)	55,6 (2.19)	33,3 (1.31)	11,1 (0.44)	15,9 (0.63)	162 (6.34)
EURG1M-10	200 (7.87)	178 (7.0)	146,1 (5.75)	54 (2.13)	50,8 (2.0)	88,9 (3.5)	38,1 (1.5)	76,2 (3.0)	44,5 (1.75)	12,7 (0.5)	19,1 (0.75)	184 (7.24)
Model	N	P	Q	R	S	T	U	V	W	X	Y	Z
EURG1M-06	130,2 (5.13)	69,9 (2.75)	30,2 (1.19)	15,9 (0.63)	34,9 (1.37)	39,9 (1.57)	23,9 (0.94)	48,3 (1.9)	G ³ / ₄ "	M16	Thru' 40 (1.57)	23 (0.91)
EURG1M-10	152,4 (6.0)	82,6 (3.25)	34,9 (1.37)	19,1 (0.75)	41,3 (1.63)	50 (1.97)	30,2 (1.19)	64,3 (2.53)	G1 ¹ / ₄ "	M20		28,6 (1.13)

EURT*-06/10

3rd angle
projection

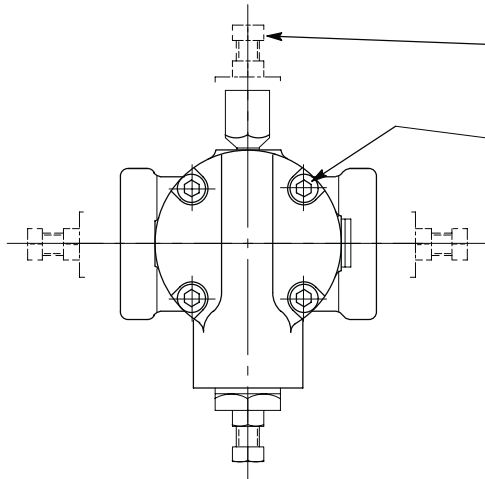

4 optional positions for adjustment control
may be obtained by rotating cover to
required position

Cover fixing screws, 4 off:


EURT*-06: M8 socket head cap screw
Torque to 32-36 Nm (24-26 lbf ft)

EURT*-10: M10 socket head cap screw
Torque to 62-70 Nm (46-51 lbf ft)


Pressure inlet or outlet connection:

EURT*-06: G^{3/4} (3/4" BSPF)

EURT*-10: G1^{1/4} (1 1/4" BSPF)

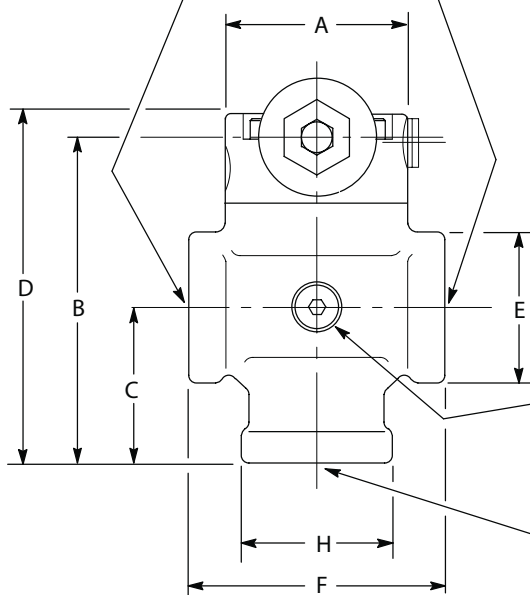

Pilot pressure connection for
unloading pump, G^{1/4} (1/4" BSPF)

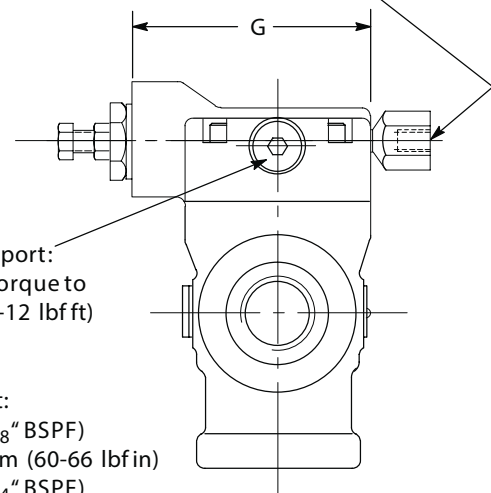

EURT1 only: Drain port:

G^{1/4} (1/4" BSPF). Torque to
15,3-16,4 Nm (11.3-12 lbf ft)

Pressure gage port:

EURT*-06: G^{1/8} (1/8" BSPF)

Torque to 6,8-7,5 Nm (60-66 lbf in)

EURT*-10: G^{1/4} (1/4" BSPF)

Torque to 15,3-16,4 Nm (11.3-12 lbf ft)

Discharge-to-tank connection:

EURT*-06: G^{3/4} (3/4" BSPF)

EURT*-10: G1^{1/4} (1 1/4" BSPF)

Model	A	B	C	D	E	F	G	H
EURT*-06	77,7 (3.06)	133,4 (5.25)	65 (2.56)	159 (6.26)	57,2 (2.25)	108,0 (4.25)	127,8 (5.03)	63,5 (2.5)
EURT*-10	95,3 (3.76)	165,1 (6.5)	76,2 (3.0)	189 (7.44)	76,2 (3.0)	127,0 (5.0)	137 (5.39)	76, (3.0)

Mass, kg (lb)

EURG*-06	11,4 (25.0)
EURG*-10	22,1 (48.6)
EURT*-06	4,6 (10.1)
EURT*-10	9,1 (20.0)
EURG1M-06	5,7 (12.5)
EURG1M-10	9,3 (20.5)

Mounting Attitude

Optional.

Ordering Procedure

Before ordering check availability with the Vickers representative. Valves, Subplates and bolt kits are supplied as separate items and must be ordered as such, e.g.

2 off -EURG1-06-B-13-UG valves
2 off -EURG1M-06-20-R subplates
2 off -BKUR-682M bolt kits

If a EURT valve is required then a check valve is also needed and must be ordered separately. The check valves recommended are C2-815 ($3/4"$) or C2-825 ($1\frac{1}{4}"$). For further details of these valves refer to leaflet 2334.

Products we offer:

- Cartridge valves
- DCV directional control valves
- Electric converters
- Electric machines
- Electric motors
- Gear motors
- Gear pumps
- Hydraulic integrated circuits (HICs)
- Hydrostatic motors
- Hydrostatic pumps
- Orbital motors
- PLUS+1® controllers
- PLUS+1® displays
- PLUS+1® joysticks and pedals
- PLUS+1® operator interfaces
- PLUS+1® sensors
- PLUS+1® software
- PLUS+1® software services, support and training
- Position controls and sensors
- PVG proportional valves
- Steering components and systems
- Telematics

Danfoss Power Solutions is a global manufacturer and supplier of high-quality hydraulic and electric components. We specialize in providing state-of-the-art technology and solutions that excel in the harsh operating conditions of the mobile off-highway market as well as the marine sector. Building on our extensive applications expertise, we work closely with you to ensure exceptional performance for a broad range of applications. We help you and other customers around the world speed up system development, reduce costs and bring vehicles and vessels to market faster.

Danfoss Power Solutions – your strongest partner in mobile hydraulics and mobile electrification.

Go to www.danfoss.com for further product information.

We offer you expert worldwide support for ensuring the best possible solutions for outstanding performance. And with an extensive network of Global Service Partners, we also provide you with comprehensive global service for all of our components.

Local address:

Hydro-Gear

www.hydro-gear.com

Daikin-Sauer-Danfoss

www.daikin-sauer-danfoss.com

**Danfoss
Power Solutions (US) Company**
2800 East 13th Street
Ames, IA 50010, USA
Phone: +1 515 239 6000

**Danfoss
Power Solutions GmbH & Co. OHG**
Krokamp 35
D-24539 Neumünster, Germany
Phone: +49 4321 871 0

**Danfoss
Power Solutions ApS**
Nordborgvej 81
DK-6430 Nordborg, Denmark
Phone: +45 7488 2222

**Danfoss
Power Solutions Trading
(Shanghai) Co., Ltd.**
Building #22, No. 1000 Jin Hai Rd
Jin Qiao, Pudong New District
Shanghai, China 201206
Phone: +86 21 2080 6201