



KDG3V-5/7/8, 10 Series

Single-Stage with Hydraulic Pilot Operation
High Flow Proportional Directional Control Valves

Basic Characteristics

Max. pressure up to 350 bar
(5000 psi)

Max. flow rate up to 700 L/min
(190 USgpm)

Mounting interfaces to ISO 4401:

KDG3V-5	Size 05 *
KDG3V-7	Size 07
KDG3V-8	Size 08

U*With additional pilot ports X and Y.


General Description

The remote control facility of these high flow capacity valves allows them to be installed in optimum locations relative to minimizing power transmission losses, close to actuators and distant from machine operators. Remote control can then be achieved using any suitable variable pressure control such as Vickers by Danfoss HRC type hydraulic remote controls which are available with a number of joystick and foot pedal options and electrical switch features.

In KDG3V valves, the spool is centered by a spring when the differential of pilot pressures applied to the valve end chambers is less than approx. 6 bar (87 psi). As the pilot pressure differential

Typical Sectional Arrangement

KDG3V-7

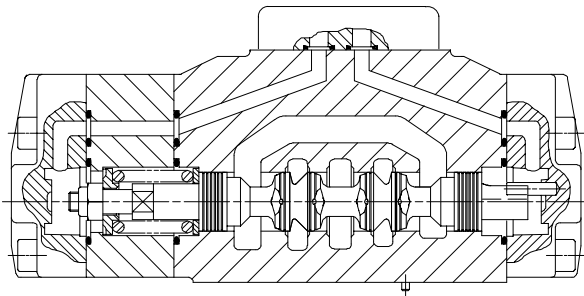

is increased the spool is moved from its centered position, and at approx. 12 bar (174 psi) differential the fluid flow path through the valve begins to open. The flow path opening then progressively increases, as the pressure is increased up to a level of approx. 30 bar (435 psi) differential, when the spool reaches the end of its travel. Further increase in pilot pressure (up to the maximum permissible) has no further effect on the output characteristics.

Good symmetrical characteristics for each direction of spool travel are achieved by using the same spring for each direction of spool travel.


Specially profiled metering notches on the spool give smooth, progressive opening/closing of the flow paths.

Vickers by Danfoss KDG3V valves offer ideal solutions for applications with repetitive load conditions, or where the load is under direct control of the machine operator.


Functional Symbols

Transient flow conditions shown by dotted lines


Spool type 2C



Spool type 33C



Spool type 133C, with typical regenerative circuit

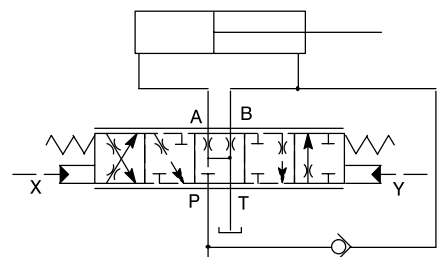

Model Codes

KDG3V - * - *** C *** N (***) - E - 1*

1 2 3 4 5 6 7 8

1 Mounting interface, ISO 4401

5 = Size 05

7 = Size 07

8 = Size 08

2 Spool type

See Functional Symbols, previous page.

2 = All ports blocked when spool is centered

33 and 133 = Bleed A and B to T when spool is centered

3 Spool control

C = Spool spring centered

4 Spool type

See adjacent table.

Flow rating (L/min) for symmetric spools; "A" port flow rating for asymmetric spools

5 Spool type

See Functional Symbols, previous page.

N = meter-in and meter-out

6 Spool type

See adjacent table.

"B" port flow rating for asymmetric spools

7 Internal plug

E = Plug fitted

8 Design number, 1* series

Subject to change. Installation dimensions unaltered for design numbers 10 to 19 respectively.

Spool Types and Flow Ratings

Flow ratings for flow through P-A-B-T at $\Delta p = 5$ bar (72 psi) per flow path, e.g. P-A or B-T. For other pressure drops see  "Flow Gain" curves.

Symmetric Spools

Spool code	Symbol	Flow rating
For KDG3V- 5 valves:		
2C90N	2C	85 L/min (22 USgpm)
33C80N	33C	75 L/min (20 USgpm)
For KDG3V- 7 valves:		
2C180N	2C	180 L/min (48 USgpm)
33C170N	33C	170 L/min (45 USgpm)
For KDG3V- 8 valves:		
2C280N	2C	280 L/min (74 USgpm)
33C270N	33C	270 L/min (71 USgpm)

Asymmetric Spools

Figure preceding metering type designator, "N" (e.g. 2C***N) is "A" port flow rating, i.e. P-A, or A-T; figure after "N" (N***) is "B" port flow rating, i.e. P-B or B-T.

Spool code	Symbol	Flow rating
For KDG3V- 5 valves:		
2C70N45	2C	70 L/min (18.5 USgpm), "A" port flow 45 L/min (12 USgpm), "B" port flow
For KDG3V- 7 valves:		
2C180N100	2C	180 L/min (48 USgpm), "A" port flow 100 L/min (26 USgpm), "B" port flow
For KDG3V- 8 valves:		
33C250N170	33C	250 L/min (66 USgpm), "A" port flow 170 L/min (45 USgpm), "B" port flow
133C250N170	133C	250 L/min (66 USgpm), "A" port flow 170 L/min (45 USgpm), "B" port flow


Operating Data

Data is typical with fluid at 36 cSt (168 SUS) and 50 °C (122 °F)

Max pressures, all ports: For KDG3V- 5 For KDG3V- 7/8	315 bar (4500 psi) 350 bar (5000 psi)
Pilot pressure for control	See below
Flow rating	See 4a and 5a model code
Flow gain	
Power capacity envelopes	See below
Mass:	kg (lb)
KDG3V-5	8,2 (18)
KDG3V-7	10,2 (22.5)
KDG3V-8	18,9 (41.6)

Power Capacity Envelopes

KDG3V-5/7/8 valves are not recommended for applications where flow/pressure drop is outside of these envelopes

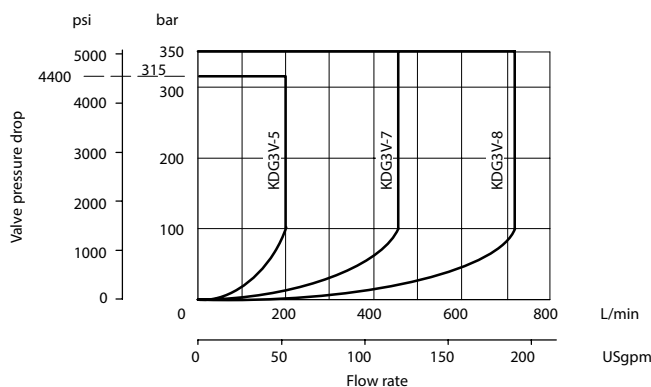

Hydraulic Fluids

Materials and seals used in these valves are compatible with antiwear hydraulic oils, water-glycols, water-in-oil emulsions and non-alkyl-based phosphate esters. The extreme operating range is 500 to 13 cSt (2270 to 70 SUS) but the recommended running range is 54 to 13 cSt (245 to 70 SUS).

Filtration Requirements

Recommendations on filtration methods and the selection of products to control fluid condition are included in Vickers by Danfoss publication 561 or 9132.

For products in this catalog the recommended fluid cleanliness levels are:

Up to 138 bar (2000 psi) 17/15/12
Above 138 bar (2000 psi) 15/13/11

Fluid Temperatures

For petroleum oil:

Min. -20 °C (-4 °F)

Max.* +70 °C (+158 °F)


* To obtain optimum service life from both fluid and hydraulic system, 65 °C (150 °F) normally is the maximum temperature.

For other fluids where limits are outside those of petroleum oil, consult fluid manufacturer or Vickers by Danfoss representative. Whatever the actual temperature range, ensure that viscosities stay within those specified under "Hydraulic Fluids".

Pilot Pressure for Control


Spool type 2C: _____

Spool types 33C and 133C: - - - -

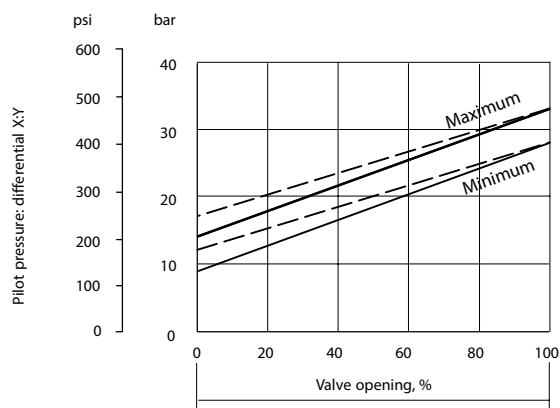


Flow Gain Curves


KDG3V-5- 2C90N

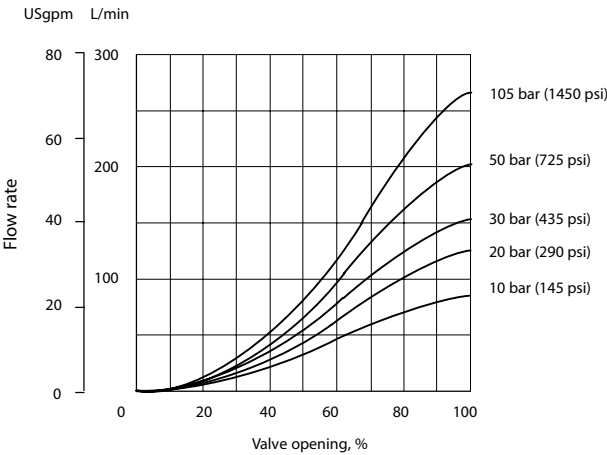


KDG3V-5- 33C80N

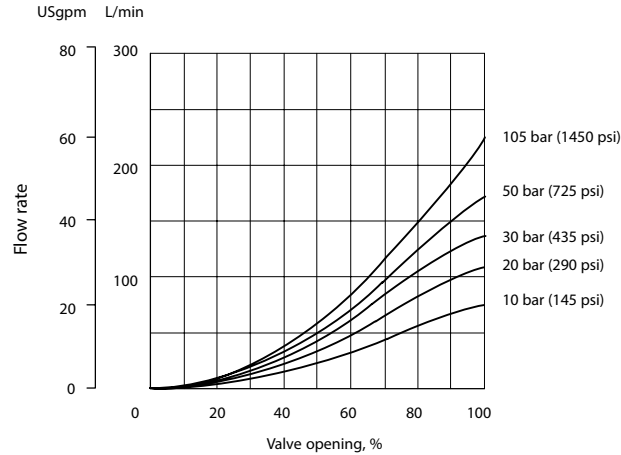


KDG3V-7- 2C180N

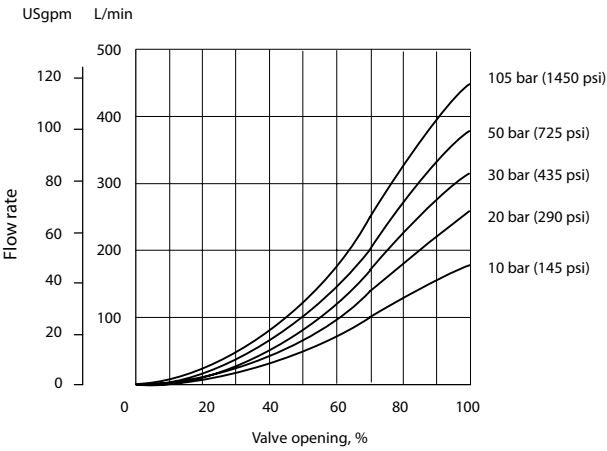


KDG3V-7- 33C170N

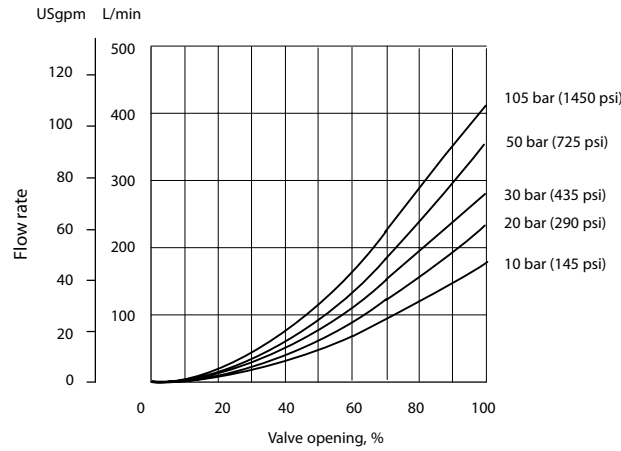

KDG3V-8- 2C280N

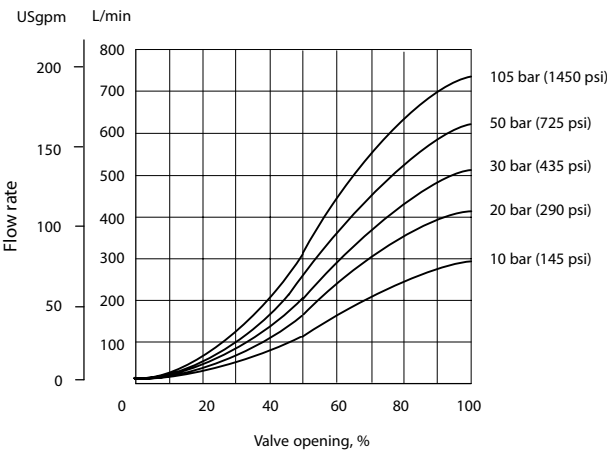

KDG3V-8- 33C270N

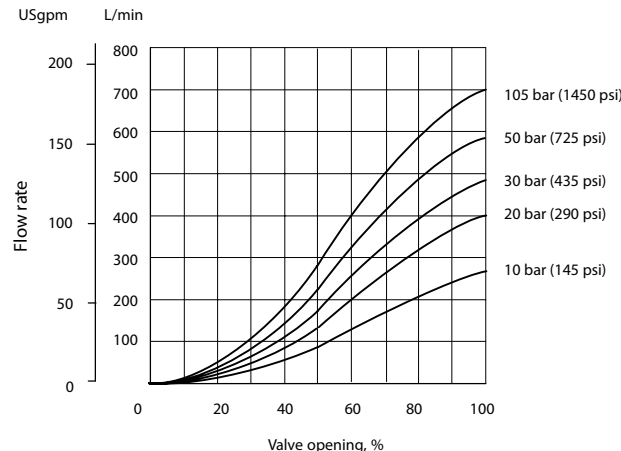

Installation Dimensions in mm (inches)

KDG3V-5

Mounting Bolt Kits

Metric, M6 BKDG01633M

Inch, 1/4"-20 UNC BKDG01633


Torque Data

Up to 210 bar (3000 psi)

..... 14 Nm (10.3 lbf ft)

Up to 315 bar (4500 psi)

..... 20 Nm (14.75 lbf ft)

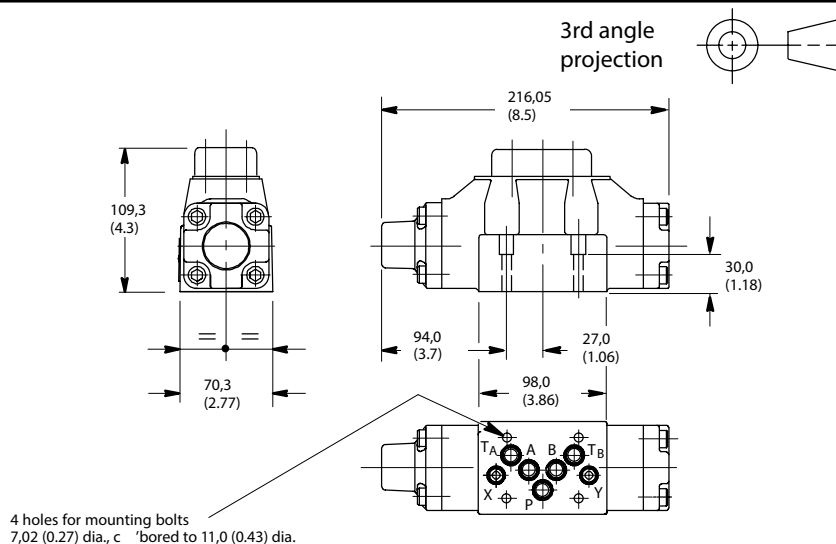

KDG3V-7

Mounting Bolt Kits

Metric, 4 x M10 plus 2 x M6

..... BKDG7858918

Inch, 4 x 3/8"-16 UNC plus 2 x 1/4"-20

UNC BKDG01633


Torque Data

M10; 3/8"-16 UNC 49-59 Nm

..... (36-43 lbf ft)

M6; 1/4"-20 UNC 9-14 Nm

..... (6.6-10.3 lbf ft)

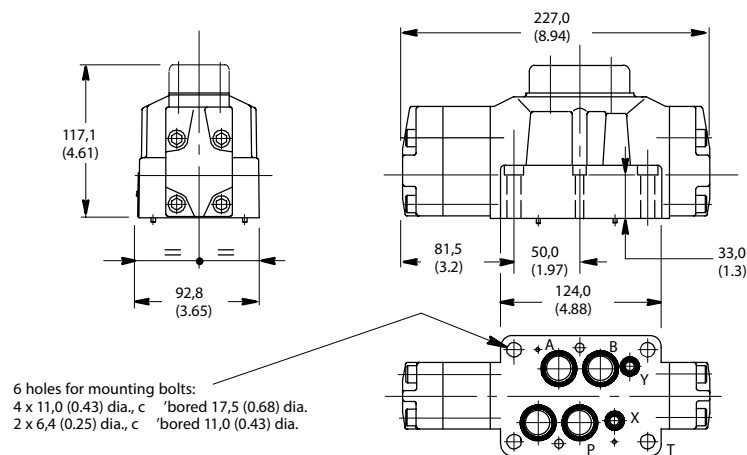

KDG3V-8

Mounting Bolt Kits


Metric, M12 BKDG06635M

Inch, 1/2"-13 UNC BKDG06635

Torque Data

M12; 1/2"-13 UNC 103-127 Nm

..... (76-93 lbf ft)

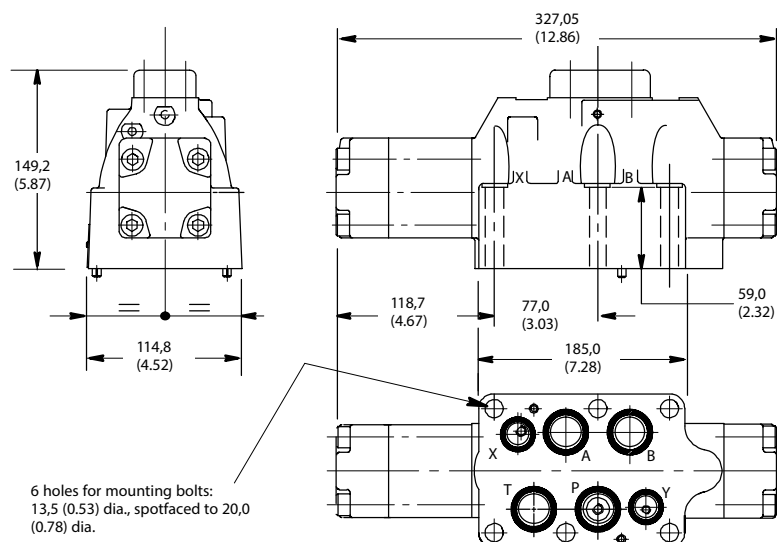

Products we offer:

- Cartridge valves
- DCV directional control valves
- Electric converters
- Electric machines
- Electric motors
- Gear motors
- Gear pumps
- Hydraulic integrated circuits (HICs)
- Hydrostatic motors
- Hydrostatic pumps
- Orbital motors
- PLUS+1® controllers
- PLUS+1® displays
- PLUS+1® joysticks and pedals
- PLUS+1® operator interfaces
- PLUS+1® sensors
- PLUS+1® software
- PLUS+1® software services, support and training
- Position controls and sensors
- PVG proportional valves
- Steering components and systems
- Telematics

Hydro-Gear

www.hydro-gear.com

Daikin-Sauer-Danfoss

www.daikin-sauer-danfoss.com

Danfoss Power Solutions is a global manufacturer and supplier of high-quality hydraulic and electric components. We specialize in providing state-of-the-art technology and solutions that excel in the harsh operating conditions of the mobile off-highway market as well as the marine sector. Building on our extensive applications expertise, we work closely with you to ensure exceptional performance for a broad range of applications. We help you and other customers around the world speed up system development, reduce costs and bring vehicles and vessels to market faster.

Danfoss Power Solutions – your strongest partner in mobile hydraulics and mobile electrification.

Go to www.danfoss.com for further product information.

We offer you expert worldwide support for ensuring the best possible solutions for outstanding performance. And with an extensive network of Global Service Partners, we also provide you with comprehensive global service for all of our components.

Local address:

**Danfoss
Power Solutions (US) Company**
2800 East 13th Street
Ames, IA 50010, USA
Phone: +1 515 239 6000

**Danfoss
Power Solutions GmbH & Co. OHG**
Krokamp 35
D-24539 Neumünster, Germany
Phone: +49 4321 871 0

**Danfoss
Power Solutions ApS**
Nordborgvej 81
DK-6430 Nordborg, Denmark
Phone: +45 7488 2222

**Danfoss
Power Solutions Trading
(Shanghai) Co., Ltd.**
Building #22, No. 1000 Jin Hai Rd
Jin Qiao, Pudong New District
Shanghai, China 201206
Phone: +86 21 2080 6201

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.