

Silicone Hose Catalog



EATON

Powering Business Worldwide



EAT•N

Powering Business Worldwide

The Power of Eaton



Char-Lynn®



Walterscheid®

Synflex®



1911

1968

1971

1999

2000

2002

2004

2005

2006

2007

2008

2010

2011

2012

Airflex®

Aeroquip
VICKERS
HYDROKRAFT™

BOSTON
WEATHERHEAD

Winner®

ARROW
HOSE & TUBING INC.
DURO
DYNE

HANSEN™
GROMELLE™

Polimer
SEL
JEIL®

EAT•N

Powering Business Worldwide

There's a certain energy at Eaton. It's the power of integrating the competencies of some of the world's most respected names to build a brand you can trust to meet every power management need. The energy created supports our commitment to powering business worldwide.

As the world's demand increases for high-efficiency hydraulic systems for mobile and stationary applications, Eaton is helping to solve these challenges more reliably, efficiently, and sustainably. Our goal is simple; to provide unique solutions across a wide range of markets that keep businesses on the leading edge of change. Visit Eaton.com/hydraulics/fusion.

That's the power of Eaton.

Serving eight key segments - sharing one focus



Alternative Energy

Making energy sources technically practical and economically sound requires the kind of control made possible by high-quality components. When Eaton is on the inside, you will experience the reliable, consistent performance to create and capture energy—making renewable energy an every-day energy.



Agriculture & Forestry

There's a reason farming and forestry are called "working the land." These segments involve some of the hardest work and longest hours of any sector in the economy. Your productivity and profitability depend on the way you manage time and tasks.



Discrete Manufacturing

Produce at peak efficiency with the superior precision and repeatability of Eaton products. Eaton hydraulic components provide the precise control and consistent operation required for virtually every step in your manufacturing operation. With Eaton, we'll help you redefine the meaning of raw productivity.



Commercial Vehicles

Eaton technologies can make your driving operation more successful. Greater comfort and productivity help increase driver retention, while reduced emissions, leaks, and noise improve environmental performance. Increased efficiencies overall mean lower costs and higher net revenue.



Oil & Gas / Marine

As the oil & gas industry continues to face further globalization and consolidation, large-scale organizations that can meet your needs in every corner of the world are more difficult to find. At Eaton, our portfolio of products is only surpassed by our tremendous reach.



Material Handling

Eaton hydraulic systems provide the precise control and consistent operation required for material handling and utility work. With a broad selection of products and solutions built in, Eaton helps make you a master of your domain.



Processing

Whatever your industry, no matter which processes you manage, Eaton parts and systems help keep you up and running. Our components make equipment more efficient and easier to use, so you get optimal machine performance and maximum productivity.



Construction & Mining

When you work on a large scale, even the details are big. You need to trust every part of the equipment that lets you handle construction and mining jobs. For reliable components that deliver consistent performance in extreme conditions, turn to Eaton.

Eaton is a leading diversified power management company

Eaton provides reliable, efficient and safe power management for a growing number of industries.

Understanding and helping our customers succeed

- Listening and understanding to requirements and business drivers
- Delivering solutions with value propositions to solve the critical business needs

Knowing what's important to our customers and integrating that knowledge into the fabric of our business

- ...to deliver innovative, quality products
- ...to respond fast
- ...to provide dedicated customer service and support around the globe

Our strength is global reach with local responsiveness and support

- Customers served in more than 150 countries
- Diverse channels ensure reliable availability and support
- Design and engineering teams provide support for standard products and custom solutions
- Eaton experts offer efficient product and application training

Table of Contents

General Description	4
Heater Hose	5
Coolant Hose	6
Turbo Hose	7
Charge Air Cooler (CAC) Hose	8
Hump Hose - Hot Side.....	9
Hose Pump - Cold Side.....	10
Elbows 45° - Hot Side	11
Elbows 45° - Cold Side	12
Elbows 90° - Hot Side	13
Elbows 90° - Cold Side	14

General Description

Eaton's Silicone Hose Products Excel In Extreme Temperatures And High Vibration Situations.

Eaton's line of silicone hose products can be used in coolant and high temperature applications. The hose products are available for turbo and charge air coolers in straights and in formed hoses for diesel and gas powered engines.

Features/Benefits

- Resistant to cracking, peeling, ozone, and aging
- Silicone is resistant to extreme temperature conditions up to 500°F
- Compensates for misalignment and offsets vibration
- Aramid reinforced configuration for fatigue-resistance at high temperatures in turbocharger application
- Available in straight lengths, 45°, and 90° elbows
- Heater and Coolant hose are SAE J20 R3 and SAE J20 R1 certified
- Color coded for application use



Applications

- Heavy duty truck and bus engines
- Buses
- Vehicles with diesel engine
- For use in high vibration, hot and cold air aspiration units
- Generators



	Part Number	Type	Construction	Temperature	I .D.(in.)
	EH225	Heater Hose	Single ply silicone polyester braid reinforced tube with blue cover	-65° F to +350°F (-54°C to +177°C)	-04/-16
	EH226	Coolant Hose	4 plies of silicone rubber with polyester woven reinforcement with blue cover	-65° F to +350°F (-54°C to +177°C)	-05/-96
	EH227	Turbo Hose	4 plies of silicone rubber with aramid woven reinforcement with red cover	-65°F to +500°F (-54°C to +260°C)	-04/-80
	FF90801	CAC Hot Hose	4 plies of silicone rubber with aramid woven reinforcement with red cover and 304 stainless steel restraining rings	-65° F to +500°F (-54°C to +260°C)	2 1/2" - 5"
	FF90800	CAC Cold Hose	4 plies of silicone rubber with polyester woven reinforcement with blue cover and 304 stainless steel restraining rings	-65° F to +350°F (-54°C to +177°C)	2 1/2" - 5"
	FF90829	Hump Hose-Hot	Silicone with aramid reinforcement with red cover	-65°F to +500°F (-54°C to +260°C)	3/4" - 6"
	FF90830	Hump Hose-Cold	Silicone with polyester reinforcement with blue cover	-65° F to +350°F (-54°C to +177°C)	3/4" - 6"
	FF90835	Elbow 90° -Hot	4 plies of silicone rubber with aramid woven reinforcement with red cover	-65°F to +500°F (-54°C to +260°C)	5/8" - 4"
	FF90836	Elbow 45° -Hot	4 plies of silicone rubber with aramid woven reinforcement with red cover	-65°F to +500°F (-54°C to +260°C)	5/8" - 4"
	FF90802	Elbow 90° -Cold	4 plies of silicone rubber with polyester woven reinforcement with blue cover	-65° F to +350°F (-54°C to +177°C)	5/8" - 4"
	FF90803	Elbow 45° -Cold	4 plies of silicone rubber with polyester woven reinforcement with blue cover	-65° F to +350°F (-54°C to +177°C)	5/8" - 3"

Heater Hose

Meets SAE J20 R3 Class A


Hose Part Number	Hose I.D.		Hose O.D.		Minimum Burst Pressure	
	mm	in	mm	in	bar	psi
EH22504	6.40	0.25	11.70	0.46	28	400
EH22505	7.90	0.31	13.20	0.52	21	300
EH22506	9.70	0.38	16.30	0.64	17	250
EH22508	12.70	0.50	19.30	0.76	17	250
EH22510	16.00	0.63	23.60	0.93	17	250
EH22512	19.10	0.75	27.20	1.07	14	200
EH22514	22.40	0.88	31.50	1.24	14	200
EH22516	25.40	1.00	35.10	1.38	12	175

Construction

- Single ply silicone polyester braid reinforced tube with blue cover

Operating Temperatures

- -65°F to + 350°F
- -54°C to +177°C
- Available in 25 ft boxes
- For heavy duty pressure connections in hostile engine environments
- Ideal for extreme temperature and various pressure ranges where high performance levels are required
- Contact Eaton for alternative length requirements

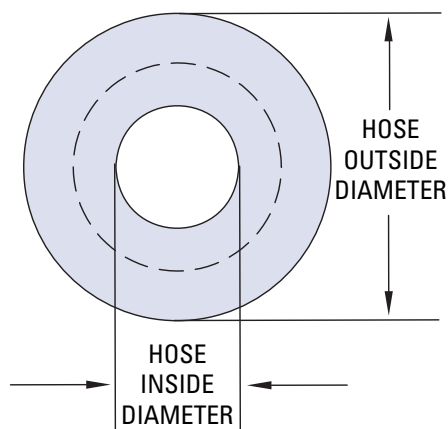

Coolant Hose

Meets SAE J20 R1 Class A

Hose Part Number	Hose I.D.		Hose O.D.		Minimum Burst Pressure	
	mm	in	mm	in	bar	psi
EH22605	7.90	0.31	17.50	0.69	74.50	1080
EH22606	8.70	0.38	19.10	0.75	73.10	1060
EH22608	12.70	0.50	22.10	0.87	60.10	872
EH22610	15.70	0.62	25.10	0.99	55.00	797
EH22612	19.10	0.75	28.40	1.12	52.70	764
EH22614	22.40	0.88	31.80	1.25	50.50	732
EH22616	25.40	1.00	34.80	1.37	48.20	699
EH22617	26.90	1.06	36.60	1.44	46.70	678
EH22618	28.70	1.13	38.10	1.50	45.40	658
EH22620	31.80	1.25	41.10	1.62	42.50	617
EH22622	35.10	1.38	44.40	1.75	37.90	550

Coolant Hose

Meets SAE J20 R1 Class A

(continued)


Hose Part Number	Hose I.D.		Hose O.D.		Minimum Burst Pressure	
	mm	in	mm	in	bar	psi
EH22624	38.10	1.50	47.50	1.87	35.90	521
EH22626	41.10	1.62	50.50	1.99	34.50	501
EH22628	44.40	1.75	53.80	2.12	32.60	473
EH22630	47.80	1.88	57.20	2.25	31.00	450
EH22632	50.80	2.00	60.20	2.37	30.50	442
EH22634	54.10	2.13	63.50	2.50	29.30	425
EH22636	57.20	2.25	66.50	2.62	28.50	413
EH22638	60.50	2.38	69.90	2.75	27.60	400
EH22640	63.50	2.50	72.90	2.87	26.10	379
EH22642	66.50	2.62	75.90	2.99	24.20	351
EH22644	69.80	2.75	79.20	3.12	23.30	338
EH22646	73.20	2.88	82.60	3.25	22.10	321
EH22648	76.20	3.00	85.60	3.37	21.90	317
EH22650	79.50	3.13	88.90	3.50	21.20	308
EH22652	82.60	3.25	91.90	3.62	20.50	298
EH22654	85.90	3.38	95.20	3.75	19.00	275
EH22656	86.90	3.50	98.30	3.87	18.20	264
EH22658	92.20	3.63	101.60	4.00	17.60	256
EH22660	95.20	3.75	104.60	4.12	17.20	249
EH22664	101.60	4.00	111.00	4.37	16.10	233
EH22666	104.90	4.13	114.60	4.51	N/A	N/A
EH22668	108.00	4.25	117.90	4.84	N/A	N/A
EH22672	114.30	4.50	123.70	4.87	N/A	N/A
EH22680	127.00	5.00	136.40	5.37	N/A	N/A
EH22688	139.70	5.50	149.10	5.87	N/A	N/A
EH22696	152.40	6.00	161.80	6.37	N/A	N/A

Construction

- 4 plies of silicone rubber with polyester woven reinforcement with blue cover
- 3 ft lengths

Operating Temperatures

- -65°F to + 350°F
- -54°C to +177°C
- For heavy duty pressure connections in hostile engine environments
- Ideal for extreme temperature and various pressure ranges where high performance levels are required
- UV and ozone resistant
- Resistant to electrochemical degradation
- Resistant to minor oil splash and petrochemical exposure
- Contact Eaton for alternative length requirements

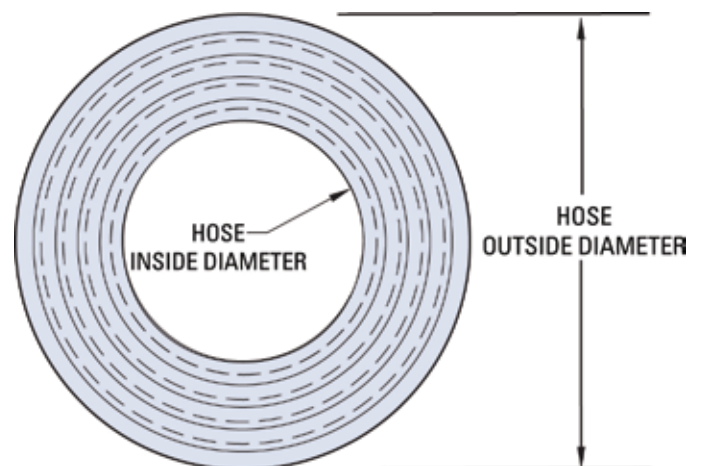

Turbo Hose


Hose Part Number	Hose I.D.		Hose O.D.	
	mm	in	mm	in
EH22704	6.40	0.25	14.50	0.57
EH22706	9.70	0.38	17.80	0.70
EH22708	12.70	0.50	20.80	0.82
EH22710	16.00	0.63	24.10	0.95
EH22712	19.10	0.75	27.20	1.07
EH22714	22.40	0.88	30.50	1.20
EH22716	25.40	1.00	33.50	1.32
EH22717	26.90	1.06	35.10	1.38
EH22718	28.70	1.13	36.80	1.45
EH22720	31.80	1.25	39.90	1.57
EH22721	33.30	1.31	41.40	1.63
EH22722	35.10	1.38	43.20	1.70
EH22724	38.10	1.50	46.20	1.62
EH22726	41.10	1.62	49.30	1.94
EH22728	44.40	1.75	52.60	2.07
EH22730	47.80	1.88	55.90	2.20
EH22732	50.80	2.00	58.90	2.32
EH22734	54.10	2.13	62.20	2.45
EH22736	57.20	2.25	65.30	2.57
EH22738	60.50	2.38	68.60	2.70
EH22740	63.50	2.50	71.60	2.82
EH22742	66.50	2.62	74.70	2.94
EH22744	69.80	2.75	78.00	3.07
EH22746	73.20	2.88	81.30	3.20
EH22748	76.20	3.00	84.30	3.32
EH22750	79.50	3.13	87.60	3.45
EH22752	82.60	3.25	90.70	3.57
EH22754	85.90	3.38	94.00	3.70
EH22756	88.90	3.50	97.00	3.82
EH22758	92.20	3.63	100.30	3.95
EH22760	95.20	3.75	103.40	4.07
EH22764	101.60	4.00	109.70	4.32
EH22772	114.30	4.50	122.40	4.82
EH22780	127.00	5.00	135.10	5.32

Construction

- 4 plies of silicone rubber with aramid woven reinforcement with red cover
- 3 ft lengths

Operating Temperatures


- -65°F to + 500°F
- -54°C to +260°C
- Designed and engineered for a wide variety of high temperature Turbocharger applications
- UV and ozone resistant
- Contact Eaton for alternative length requirements

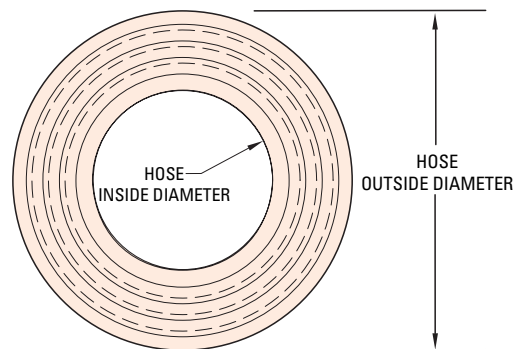

Charge Air Coolers (CAC) Hose

Charge Air- Hot side CAC Hose Convolutd

Hose Part Number	I.D.		Overall Length	
	mm	in	mm	in
FF90801-01	63.50	2.50	152.40	6.00
FF90801-02	76.20	3.00	152.40	6.00
FF90801-03	88.90	3.50	152.40	6.00
FF90801-04	101.60	4.00	152.40	6.00
FF90801-05	101.60	4.00	177.80	7.00
FF90801-06	101.60	4.00	203.20	8.00
FF90801-07	114.30	4.50	152.40	6.00
FF90801-08	127.00	5.00	152.40	6.00

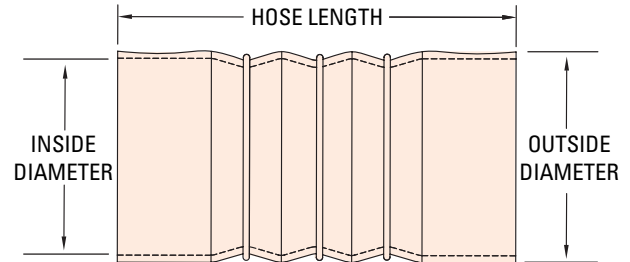

Construction


- 4 plies of silicone rubber with aramid woven reinforcement with red cover and 304 stainless steel restraining rings

Operating Temperatures

- -65°F to + 500°F
- -54°C to +260°C
- Designed and engineered to connect engine mounted charge air systems
- UV and ozone resistant
- Ideal for minor misalignments and handling vibration between hose ends

Charge Air- Cold side CAC Hose Convolutd

Hose Part Number	I.D.		Overall Length	
	mm	in	mm	in
FF90800-01	63.50	2.50	152.40	6.00
FF90800-02	76.20	3.00	152.40	6.00
FF90800-03	88.90	3.50	152.40	6.00
FF90800-04	101.60	4.00	152.40	6.00
FF90800-05	101.60	4.00	177.80	7.00
FF90800-06	101.60	4.00	203.20	8.00
FF90800-07	114.30	4.50	152.40	6.00
FF90800-08	127.00	5.00	152.40	6.00

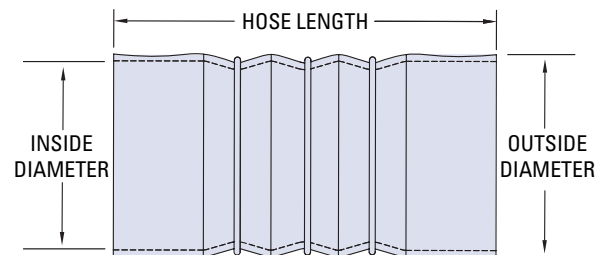

Construction

- 4 plies of silicone rubber with polyester woven reinforcement with blue cover and 304 stainless steel restraining rings

Operating Temperatures

- -65°F to + 350°F
- -54°C to +177°C
- Designed and engineered to connect engine mounted charge air systems
- UV and ozone resistant
- Ideal for minor misalignments and handling vibration between hose ends
- 304 stainless steel rings reduce swelling and increase hoop strength

Hump Hose - Hot Side


Hose Part Number	Hose I.D.		Hose O.D.		Overall Length	
	mm	in	mm	in	mm	in
FF90829-12	19.00	0.75	27.10	1.07	152.40	6.00
FF90829-16	25.40	1.00	33.40	1.32	152.40	6.00
FF90829-20	31.80	1.25	39.80	1.57	152.40	6.00
FF90829-24	38.10	1.50	46.10	1.82	152.40	6.00
FF90829-28	44.40	1.75	52.50	2.07	152.40	6.00
FF90829-32	50.80	2.00	58.80	2.32	152.40	6.00
FF90829-36	57.20	2.25	65.20	2.57	152.40	6.00
FF90829-40	63.50	2.50	71.50	2.82	152.40	6.00
FF90829-44	69.80	2.75	77.90	3.07	152.40	6.00
FF90829-48	76.20	3.00	84.20	3.32	152.40	6.00
FF90829-52	82.60	3.25	90.60	3.57	152.40	6.00
FF90829-56	88.90	3.50	96.90	3.82	152.40	6.00
FF90829-60	95.20	3.75	103.30	4.07	152.40	6.00
FF90829-64	101.60	4.00	109.60	4.32	152.40	6.00
FF90829-72	114.30	4.50	122.30	4.82	152.40	6.00
FF90829-80	127.00	5.00	135.00	5.32	152.40	6.00
FF90829-88	139.70	5.50	147.70	5.82	152.40	6.00
FF90829-96	152.40	6.00	160.40	6.32	152.40	6.00

Construction

- Silicone with aramid reinforcement with red cover

Operating Temperatures

- -65°F to + 500°F
- -54°C to +260°C
- Designed and engineered for a wide variety of high temperature turbocharger applications
- UV and ozone resistant
- Compensates for system misalignment and offsets vibration

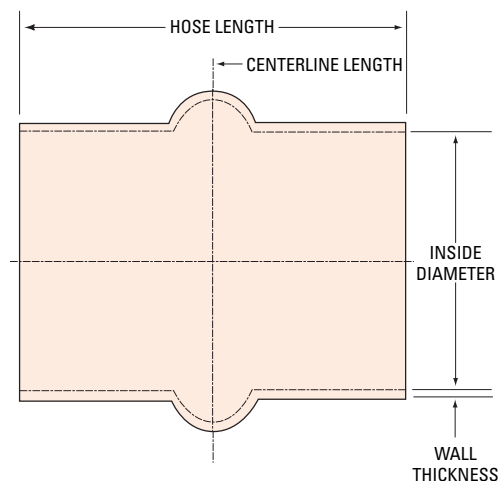

Hump Hose - Cold Side


Hose Part Number	Hose I.D.		Hose O.D.		Overall Length	
	mm	in	mm	in	mm	in
FF90830-12	19.00	0.75	28.50	1.12	152.40	6.00
FF90830-16	25.40	1.00	34.85	1.37	152.40	6.00
FF90830-20	31.80	1.25	41.20	1.62	152.40	6.00
FF90830-24	38.10	1.50	47.55	1.87	152.40	6.00
FF90830-28	44.40	1.75	53.90	2.07	152.40	6.00
FF90830-32	50.80	2.00	60.25	2.37	152.40	6.00
FF90830-36	57.20	2.25	66.60	2.62	152.40	6.00
FF90830-40	63.50	2.50	72.95	2.87	152.40	6.00
FF90830-44	69.80	2.75	79.30	3.12	152.40	6.00
FF90830-48	76.20	3.00	85.65	3.37	152.40	6.00
FF90830-52	82.60	3.25	92.00	3.62	152.40	6.00
FF90830-56	88.90	3.50	98.35	3.87	152.40	6.00
FF90830-60	95.20	3.75	104.70	4.12	152.40	6.00
FF90830-64	101.60	4.00	111.05	4.37	152.40	6.00
FF90830-72	114.30	4.50	123.75	4.87	152.40	6.00
FF90830-80	127.00	5.00	136.45	5.37	152.40	6.00
FF90830-88	139.70	5.50	149.15	5.87	152.40	6.00
FF90830-96	152.40	6.00	161.85	6.37	152.40	6.00

Construction

- Silicone with polyester reinforcement with blue cover

Operating Temperatures

- -65°F to + 350°F
- -54°C to +177°C
- Designed and engineered for a wide variety of high temperature turbocharger applications
- UV and ozone resistant
- Compensates for system misalignment and offsets vibration

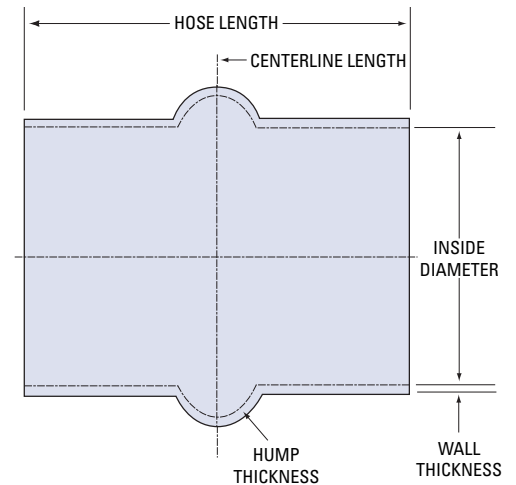

Elbows 45° - Hot Side


Hose Part Number	Hose I.D.		Length 1		Length 2		Radius	
	mm	in	mm	in	mm	in	mm	in
FF90836-01	16.00	0.63	152.40	6.00	152.40	6.00	25.40	1.00
FF90836-02	19.10	0.75	152.40	6.00	152.40	6.00	25.40	1.00
FF90836-03	22.40	0.88	152.40	6.00	152.40	6.00	38.10	1.50
FF90836-04	25.40	1.00	152.40	6.00	152.40	6.00	38.10	1.50
FF90836-05	31.80	1.25	152.40	6.00	152.40	6.00	44.40	1.80
FF90836-06	38.10	1.50	152.40	6.00	152.40	6.00	50.80	2.00
FF90836-07	44.40	1.75	152.40	6.00	152.40	6.00	44.40	1.80
FF90836-08	50.80	2.00	152.40	6.00	152.40	6.00	76.20	3.00
FF90836-11	57.20	2.25	152.40	6.00	152.40	6.00	57.20	2.30
FF90836-14	63.50	2.50	152.40	6.00	152.40	6.00	63.50	2.50
FF90836-15	69.80	2.75	152.40	6.00	152.40	6.00	88.90	3.50
FF90836-16	76.20	3.00	152.40	6.00	152.40	6.00	101.60	4.00

Construction

- 4 plies of silicone rubber with aramid woven reinforcement with red cover

Operating Temperatures

- -65°F to + 500°F
- -54°C to +260°C
- Designed and engineered for a wide variety of high temperature turbocharger applications
- UV and ozone resistant
- Resistant to minor oil splash and petrochemical exposure

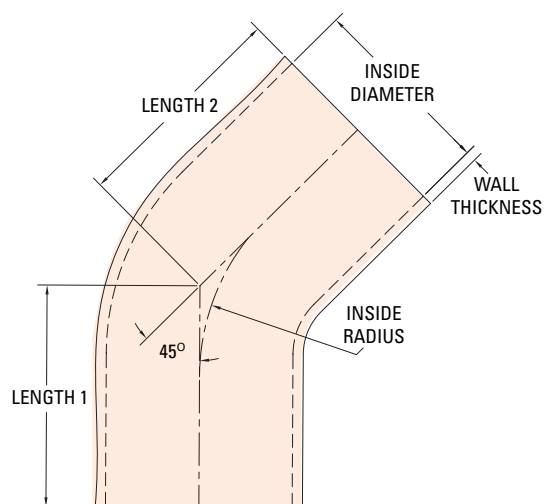

Elbows 45° - Cold Side

Meets or exceeds SAE J20 R1 Class A
TMC RP303B Grade I and Grade II


Hose Part Number	Hose I.D.		Length 1		Length 2		Radius	
	mm	in	mm	in	mm	in	mm	in
FF90803-01	16.00	0.63	152.40	6.00	152.40	6.00	25.40	1.00
FF90803-02	19.10	0.75	152.40	6.00	152.40	6.00	25.40	1.00
FF90803-03	22.40	0.88	152.40	6.00	152.40	6.00	38.10	1.50
FF90803-04	25.40	1.00	152.40	6.00	152.40	6.00	38.10	1.50
FF90803-05	31.80	1.25	152.40	6.00	152.40	6.00	44.40	1.75
FF90803-06	38.10	1.50	152.40	6.00	152.40	6.00	50.80	2.00
FF90803-07	44.40	1.75	152.40	6.00	152.40	6.00	44.40	1.75
FF90803-08	47.80	1.88	152.40	6.00	152.40	6.00	76.20	3.00
FF90803-09	50.80	2.00	152.40	6.00	152.40	6.00	101.60	4.00
FF90803-10	57.20	2.25	152.40	6.00	228.60	9.00	57.20	2.25
FF90803-11	57.20	2.25	152.40	6.00	152.40	6.00	101.60	4.00
FF90803-12	57.20	2.25	152.40	6.00	152.40	6.00	57.20	2.25
FF90803-13	63.50	2.50	152.40	6.00	152.40	6.00	76.20	3.00
FF90803-14	63.50	2.50	152.40	6.00	152.40	6.00	63.50	2.50
FF90803-15	69.90	2.75	152.40	6.00	152.40	6.00	88.90	3.50
FF90803-16	76.20	3.00	152.40	6.00	152.40	6.00	101.60	4.00

Construction

- 4 plies of silicone rubber with polyester woven reinforcement with blue cover

Operating Temperatures

- -65°F to + 350°F
- -54°C to +177°C
- UV and ozone resistant

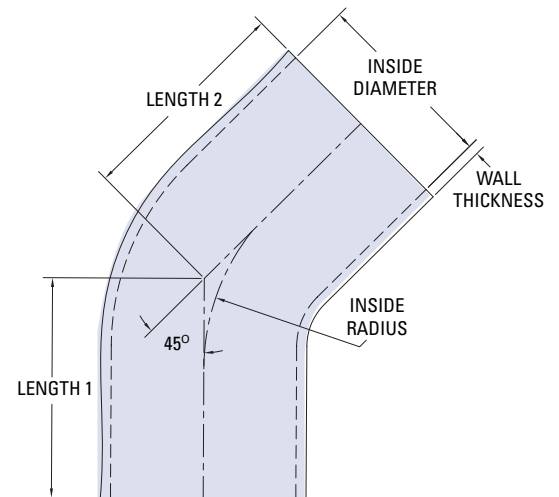

Elbows 90° - Hot Side


Hose Part Number	Hose I.D.		Length 1		Length 2		Radius	
	mm	in	mm	in	mm	in	mm	in
FF90835-01	16.00	0.63	152.40	6.00	152.40	6.00	25.40	1.00
FF90835-02	19.10	0.75	152.40	6.00	152.40	6.00	25.40	1.00
FF90835-03	22.40	0.88	152.40	6.00	152.40	6.00	38.10	1.50
FF90835-04	25.40	1.00	152.40	6.00	152.40	6.00	38.10	1.50
FF90835-05	31.80	1.25	152.40	6.00	152.40	6.00	44.40	1.75
FF90835-06	38.10	1.50	152.40	6.00	152.40	6.00	50.80	2.00
FF90835-07	44.40	1.75	152.40	6.00	152.40	6.00	44.40	1.75
FF90835-08	47.80	1.88	152.40	6.00	152.40	6.00	76.20	3.00
FF90835-09	50.80	2.00	152.40	6.00	152.40	6.00	101.60	4.00
FF90835-10	57.20	2.25	152.40	6.00	152.40	6.00	101.60	4.00
FF90835-11	57.20	2.25	152.40	6.00	152.40	6.00	57.20	2.25
FF90835-13	63.50	2.50	152.40	6.00	152.40	6.00	63.50	2.50
FF90835-14	69.90	2.75	152.40	6.00	152.40	6.00	88.90	3.50
FF90835-15	76.20	3.00	152.40	6.00	152.40	6.00	63.50	2.50
FF90835-18	88.90	3.50	152.40	6.00	152.40	6.00	88.90	3.50
FF90835-19	101.60	4.00	152.40	6.00	152.40	6.00	101.60	4.00

Construction

- 4 plies of silicone rubber with aramid woven reinforcement with red cover

Operating Temperatures

- -65°F to + 500°F
- -54°C to +260°C
- Designed and engineered for a wide variety of high temperature turbocharger applications
- UV and ozone resistant
- Resistant to minor oil splash and petrochemical exposure

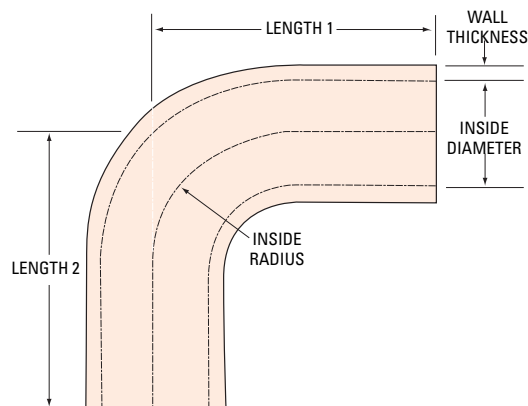

Elbows 90° - Cold Side

Meets or exceeds SAE J20 R1 Class A
TMC RP303B Grade I and Grade II


Hose Part Number	Hose I.D.		Length 1		Length 2		Radius	
	mm	in	mm	in	mm	in	mm	in
FF90802-01	16.00	0.63	152.40	6.00	152.40	6.00	25.40	1.00
FF90802-02	19.10	0.75	152.40	6.00	152.40	6.00	25.40	1.00
FF90802-03	22.40	0.88	152.40	6.00	152.40	6.00	38.10	1.50
FF90802-04	25.40	1.00	152.40	6.00	152.40	6.00	38.10	1.50
FF90802-05	31.80	1.25	152.40	6.00	152.40	6.00	44.50	1.75
FF90802-06	38.10	1.50	152.40	6.00	152.40	6.00	50.80	2.00
FF90802-07	44.50	1.75	152.40	6.00	152.40	6.00	44.50	1.75
FF90802-08	47.80	1.88	152.40	6.00	152.40	6.00	76.20	3.00
FF90802-09	50.80	2.00	152.40	6.00	152.40	6.00	101.60	4.00
FF90802-10	57.20	2.25	152.40	6.00	228.60	9.00	57.20	2.25
FF90802-11	57.20	2.25	152.40	6.00	152.40	6.00	101.60	4.00
FF90802-12	57.20	2.25	152.40	6.00	152.40	6.00	57.20	2.25
FF90802-13	63.50	2.50	152.40	6.00	152.40	6.00	76.20	3.00
FF90802-14	63.50	2.50	152.40	6.00	152.40	6.00	63.50	2.50
FF90802-15	69.90	2.75	152.40	6.00	152.40	6.00	88.90	3.50
FF90802-16	76.20	3.00	152.40	6.00	152.40	6.00	101.60	4.00
FF90802-17	76.20	3.00	152.40	6.00	152.40	6.00	76.20	3.00
FF90802-18	76.20	3.00	152.40	6.00	152.40	6.00	127.00	5.00
FF90802-19	88.90	3.50	152.40	6.00	152.40	6.00	88.90	3.50
FF90802-20	101.60	4.00	152.40	6.00	152.40	6.00	101.60	4.00

Construction

- 4 plies of silicone rubber with polyester woven reinforcement with blue cover

Operating Temperatures

- -65°F to + 350°F
- -54°C to +177°C
- UV and ozone resistant

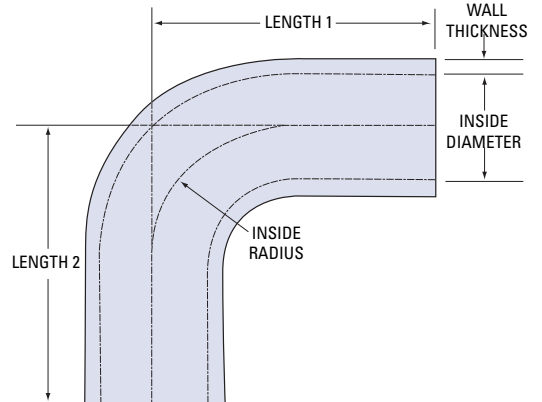

Eaton
Hydraulics Group USA
14615 Lone Oak Road
Eden Prairie, MN 55344
USA
Tel: 952-937-9800
Fax: 952-294-7722
www.eaton.com/hydraulics

Eaton
Hydraulics Group Europe
Route de la Longeraie 7
1110 Morges
Switzerland
Tel: +41 (0) 21 811 4600
Fax: +41 (0) 21 811 4601

Eaton
Hydraulics Group Asia Pacific
Eaton Building
No.7 Lane 280 Linhong Road
Changning District,
Shanghai 200335
China
Tel: (+86 21) 5200 0099
Fax: (+86 21) 2230 7240



Powering Business Worldwide

© 2013 Eaton Corporation
All Rights Reserved
Printed in USA
Document: E-HOOV-MC004-E3
January 2013