


REV	DESCRIPTION	BY	CHK	DATE	ECN / MPS
A	ENGINEERING RELEASE	LMD	LMD	2-12-05	M63978

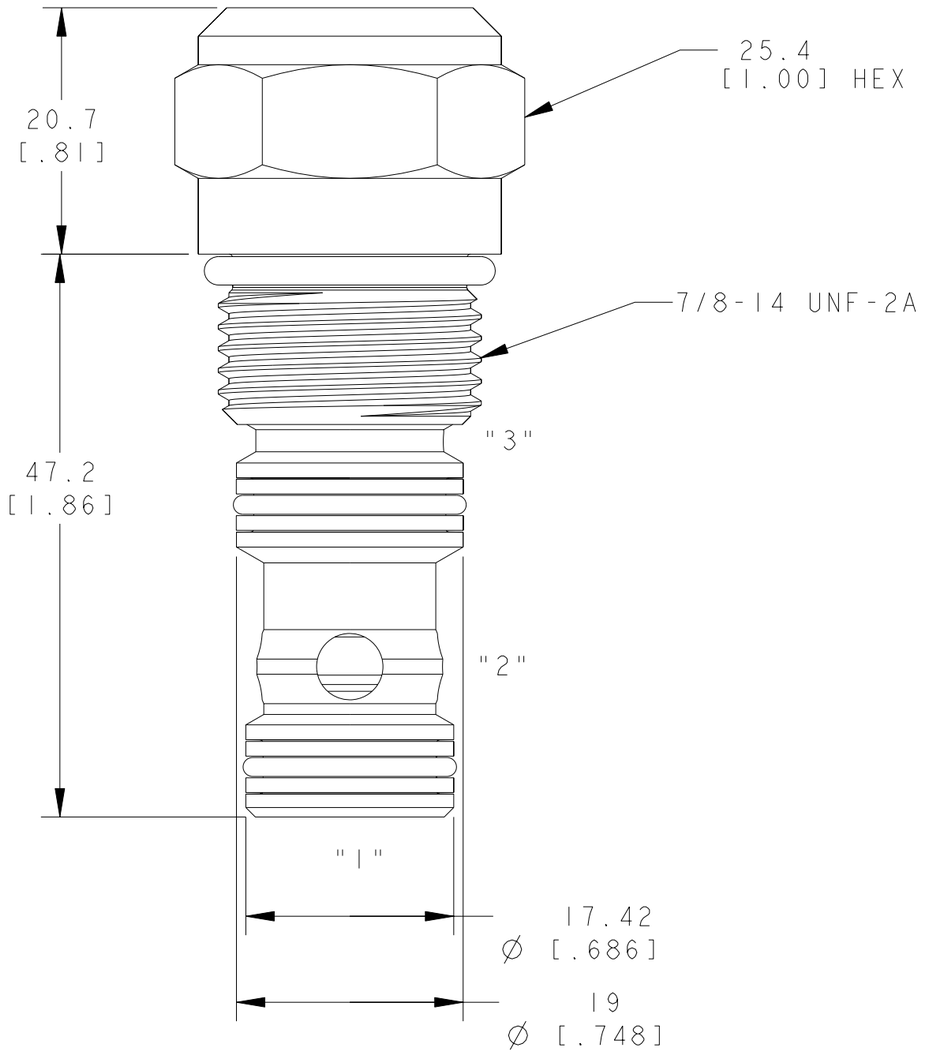





P TYPE




V TYPE




R TYPE




F TYPE



B TYPE



S TYPE



T TYPE

NOTE

1 USE VALVE CAVITY C-10-3S

2 TORQUE INTO CAVITY: ALUMINUM 47-54 N•m [35-40 lbf•ft]
STEEL 68-70 N•m [50-55 lbf•ft]

3 NET WEIGHT: .14 kg [.30 lbs]

MC

DISTRIBUTION CODE(S)

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN
INCHES ☐
MILLIMETERS (INCHES) ☒

TOLERANCES
.X ±
.XX ±
.XXX ±
∠ ±

UNSPECIFIED RADII ARE:

UNSPECIFIED DRAFT ANGLES ARE:
°

B SIZE

DRAWING BASED ON ANSI Y14.5M-1982

THE REPRODUCTION, DISTRIBUTION, AND UTILIZATION OF THIS DOCUMENT, AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPLICIT AUTHORIZATION IS PROHIBITED. OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHTS RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL, OR DESIGN.
(PER ISO 16016)

Danfoss

DRAWN BY/DATE LMD 3-16-05
CHECKED BY/DATE LMD 3-16-05
ENGRG BY/DATE AH 11-16-05
METALLURGY BY/DATE ----

MATERIAL/HEAT TREAT

TITLE
DIFFERENTIAL PRESSURE SENSING VALVE

THIRD ANGLE PROJECTION

DO NOT SCALE

MICROINCHES ☒
MICROMETERS (MICROINCHES) ☐
ARITHMETICAL AVERAGE ✓

NUMBER
A-2658-001

SCALE 2/1

SHEET 1 OF 1