


REV	DESCRIPTION	BY	CHK	DATE	ECN / MPS
A	ENGINEERING RELEASE	RS	AH	2/16/05	M63978

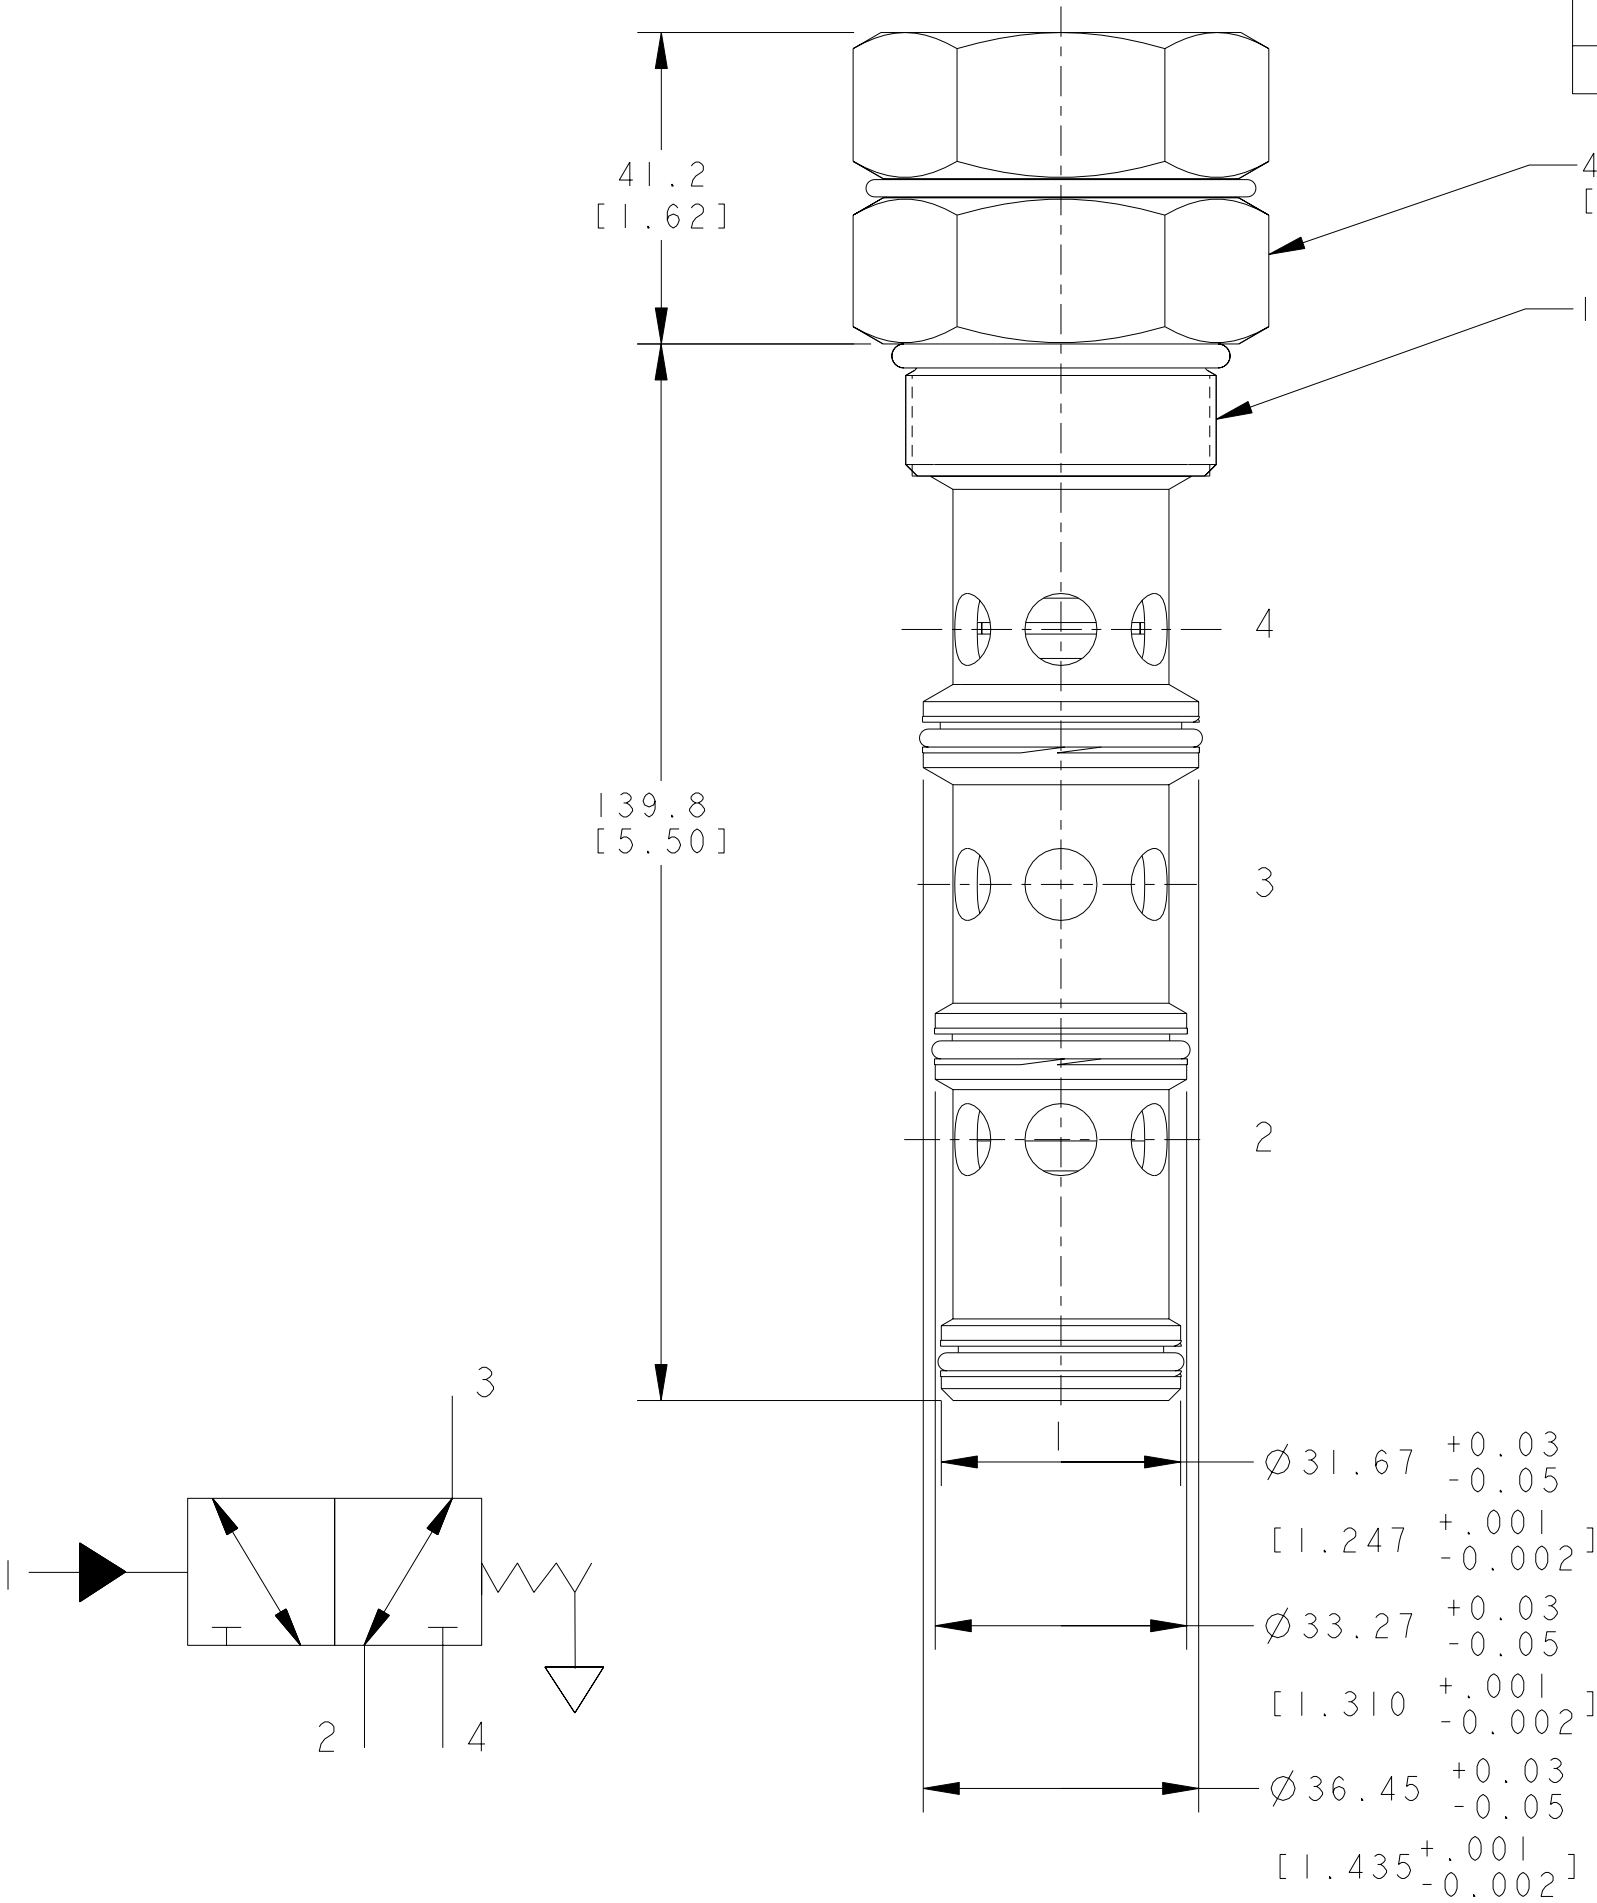

NOTE:

1. USE VALVE CAVITY # C-20-4

2. NET WEIGHT: 1.1Kg (2.40 lbs)


3. TORQUE INTO CAVITY:

ALUMINIUM CAVITY: 128-155 N.m (95-115 lbf.ft)

STEEL CAVITY: 163-183 N.m (120-135 lbf.ft)

MC

DISTRIBUTION CODE(S)

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES ☐ MILLIMETERS (INCHES) ☒		DRAWING BASED ON ANSI Y14.5M-1982				
TOLERANCES .X ± -- .XX ± -- .XXX ± -- ∠ ± --		THE REPRODUCTION, DISTRIBUTION, AND UTILIZATION OF THIS DOCUMENT, AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPLICIT AUTHORIZATION IS PROHIBITED. OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHTS RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL, OR DESIGN. (PER ISO 16016)				
		DRAWN AVS BY/DATE 12-14-02				MATERIAL/HEAT TREAT -- --
		CHECKED RSI BY/DATE 12-22-04				
UNSPECIFIED RADII ARE: --		ENGRG -- BY/DATE --		TITLE PTSI-20 INSTALLATION		
		METALLURGY -- BY/DATE --				
UNSPECIFIED DRAFT ANGLES ARE: --°		 THIRD ANGLE PROJECTION		MICROINCHES ☒ MICROMETERS (MICROINCHES) ☐ -- ✓ ARITHMETICAL AVERAGE		
B SIZE				NUMBER A-2614-003		
		DO NOT SCALE		SCALE 1/1		
				SHEET 1 OF 1		