


REV	DESCRIPTION	BY	CHK	DATE	ECN / MPS
A	ENGINEERING RELEASE	RSI	JGS	2/12/05	M63978

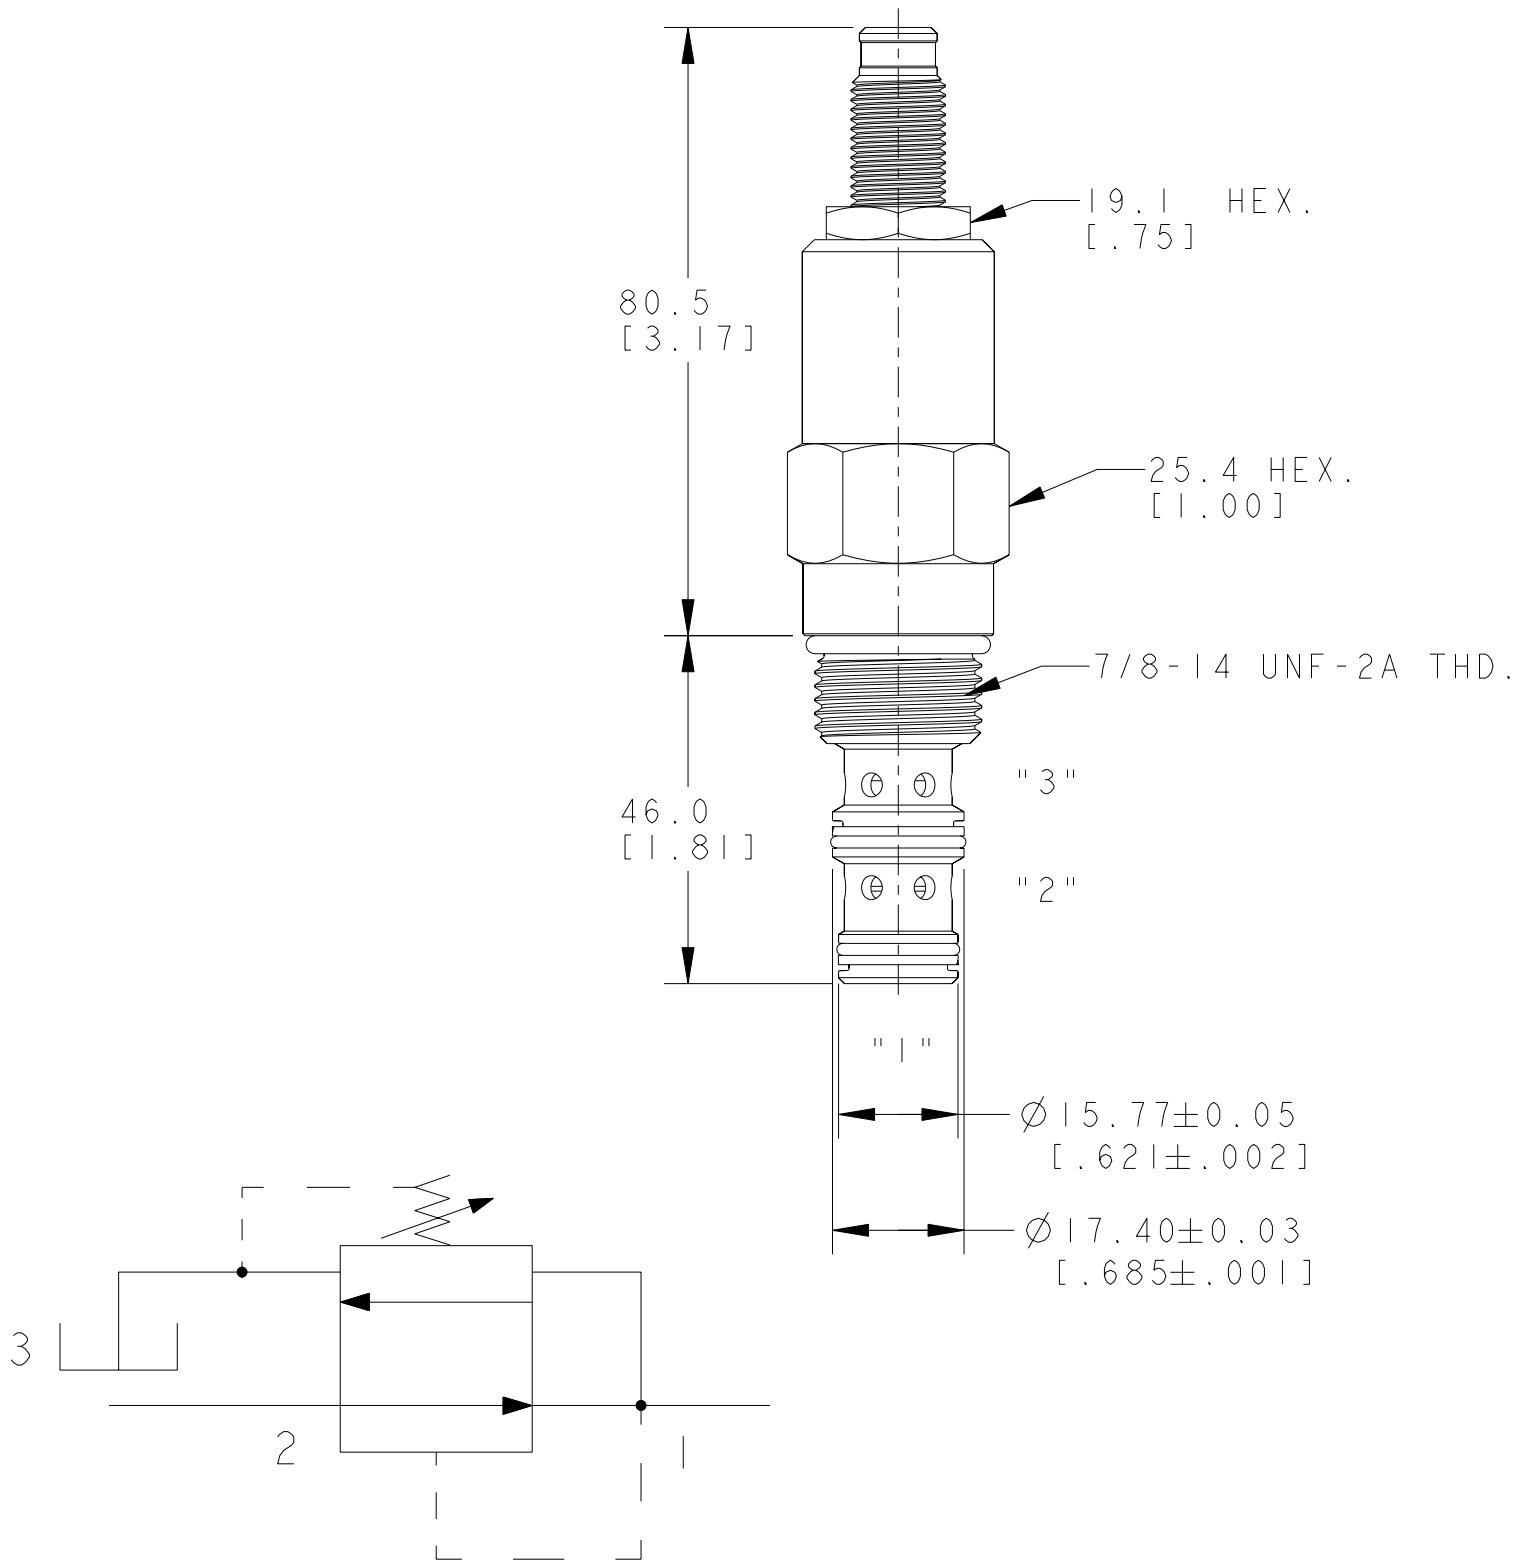

NOTE:

1. USE VALVE CAVITY C-10-3.

2. NET WEIGHT OF CARTRIDGE: 0.24kg [.54 lb]


3. TORQUE INTO CAVITY:

ALUMINIUM CAVITY: 47-54 N.m [35-40 lbf.ft]

STEEL CAVITY : 68-75 N.m [50-55 lbf.ft]

MC

DISTRIBUTION CODE(S)

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES ☐ MILLIMETERS (INCHES) ☒		DRAWING BASED ON ANSI Y14.5M-1982			
TOLERANCES X ± -- XX ± -- XXX ± -- ∠ ± --		THE REPRODUCTION, DISTRIBUTION, AND UTILIZATION OF THIS DOCUMENT, AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPLICIT AUTHORIZATION IS PROHIBITED. OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHTS RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL, OR DESIGN. (PER ISO 16016)			
UNSPECIFIED RADII ARE: --		DRAWN SKS BY/DATE 05/16/05		MATERIAL/HEAT TREAT -- --	
		CHECKED RSI BY/DATE 05/17/05			
UNSPECIFIED DRAFT ANGLES ARE: --°		ENGRG -- BY/DATE --		TITLE PRESSURE CONTROL INSTALLATION	
		METALLURGY -- BY/DATE --			
B SIZE		 THIRD ANGLE PROJECTION DO NOT SCALE		MICROINCHES ☒ MICROMETERS (MICROINCHES) ☐ -- ✓ ARITHMETICAL AVERAGE	
				NUMBER A-2682-030 SCALE 1/1 SHEET 1 OF 1	