
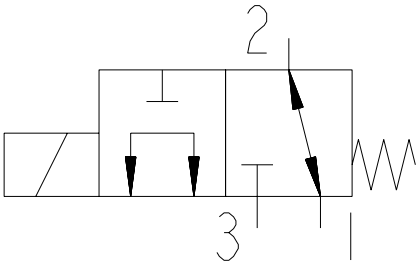


REV	DESCRIPTION	BY	CHK	DATE	ECN / MPS
A	ENGINEERING RELEASE	JGS	AH	2/12/05	M63978

27.2/[1.07] ACTIVATED
24.4/[.96] DEACTIVATED

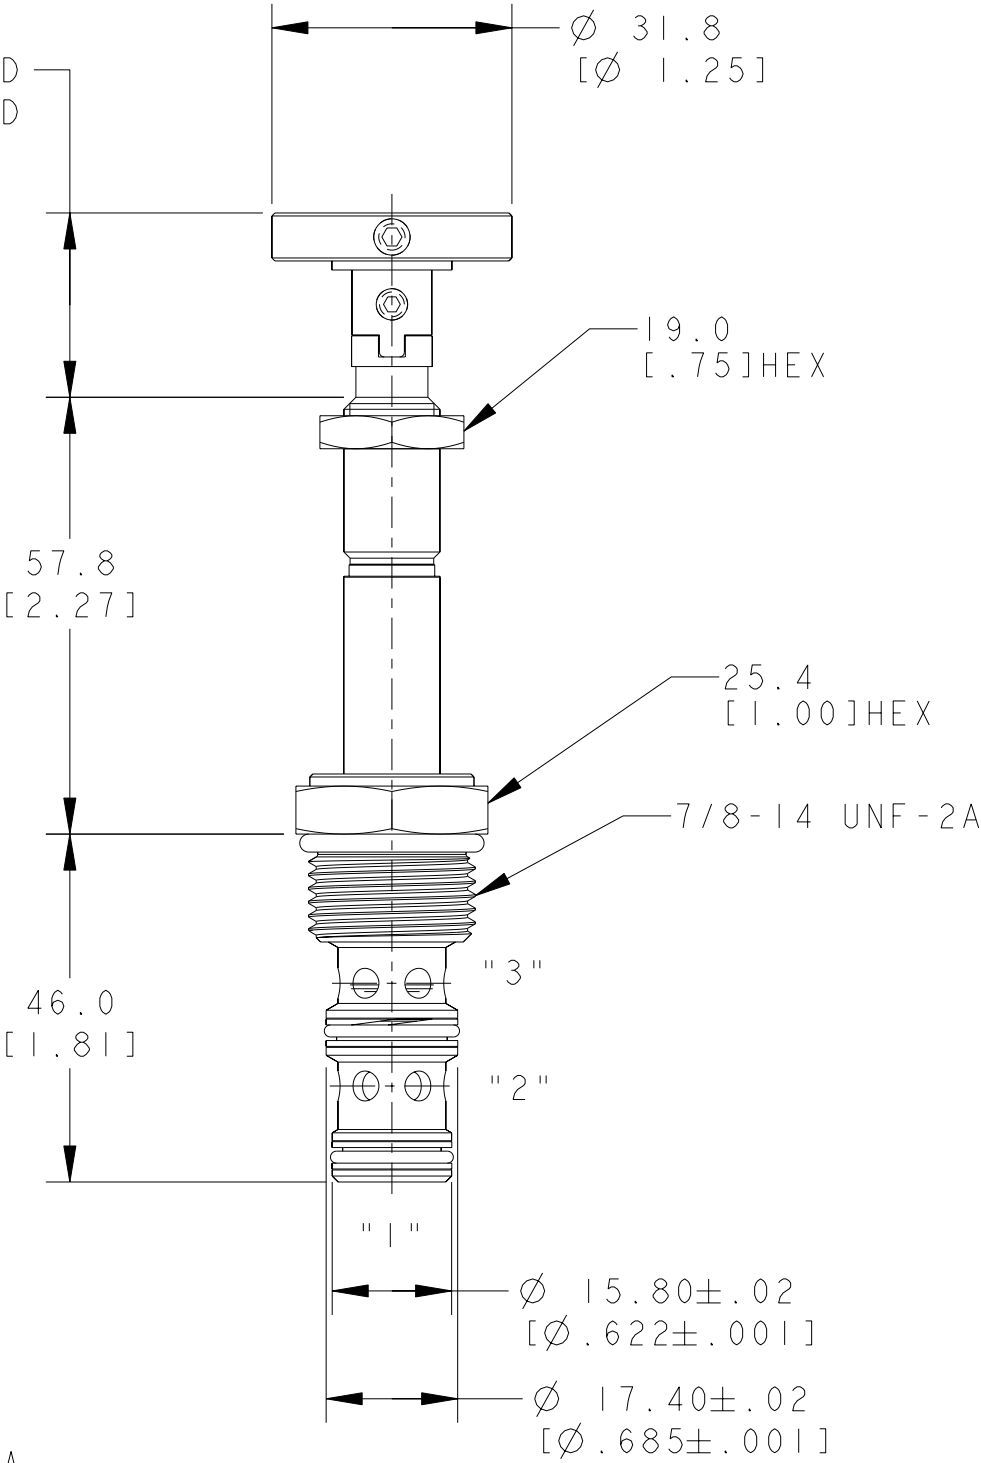


NOTE:

- 1 USE VALVE CAVITY C-10-3
- 2 NET WEIGHT:
CARTRIDGE ONLY: .14 kg[.30 lb]
CARTRIDGE W/COIL: .41kg[.92 lb]
CARTRIDGE W/COIL AND ALUMINUM BODY: .70 kg[1.56 lb]
- 3 TORQUE INTO CAVITY:
ALUMINUM CAVITY: 47-54 N.m [35-40 lbf.ft]
STEEL CAVITY: 68-75 N.m [50-55 lbf.ft]

MC

DISTRIBUTION CODE(S)

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES ☐ MILLIMETERS (INCHES) ☒		DRAWING BASED ON ANSI Y14.5M-1982			
TOLERANCES . XX XXX / ±		THE REPRODUCTION, DISTRIBUTION, AND UTILIZATION OF THIS DOCUMENT, AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPLICIT AUTHORIZATION IS PROHIBITED. OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHTS RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL, OR DESIGN. (PER ISO 16016)			
UNSPECIFIED RADII ARE: -----		DRAWN JGS BY/DATE 6/20/03		MATERIAL/HEAT TREAT 、 、	
		CHECKED LMD BY/DATE 8/4/03			
UNSPECIFIED DRAFT ANGLES ARE: -----°		ENGRG BY/DATE		TITLE SOLENOID VALVE INSTALLATION	
		METALLURGY BY/DATE			
B SIZE		 THIRD ANGLE PROJECTION DO NOT SCALE		MICROINCHES ☐ MICROMETERS (MICROINCHES) ☒ ✓ ARITHMETICAL AVERAGE	
				NUMBER A-2416-010	
				SCALE 1/1	SHEET 1 OF 1