


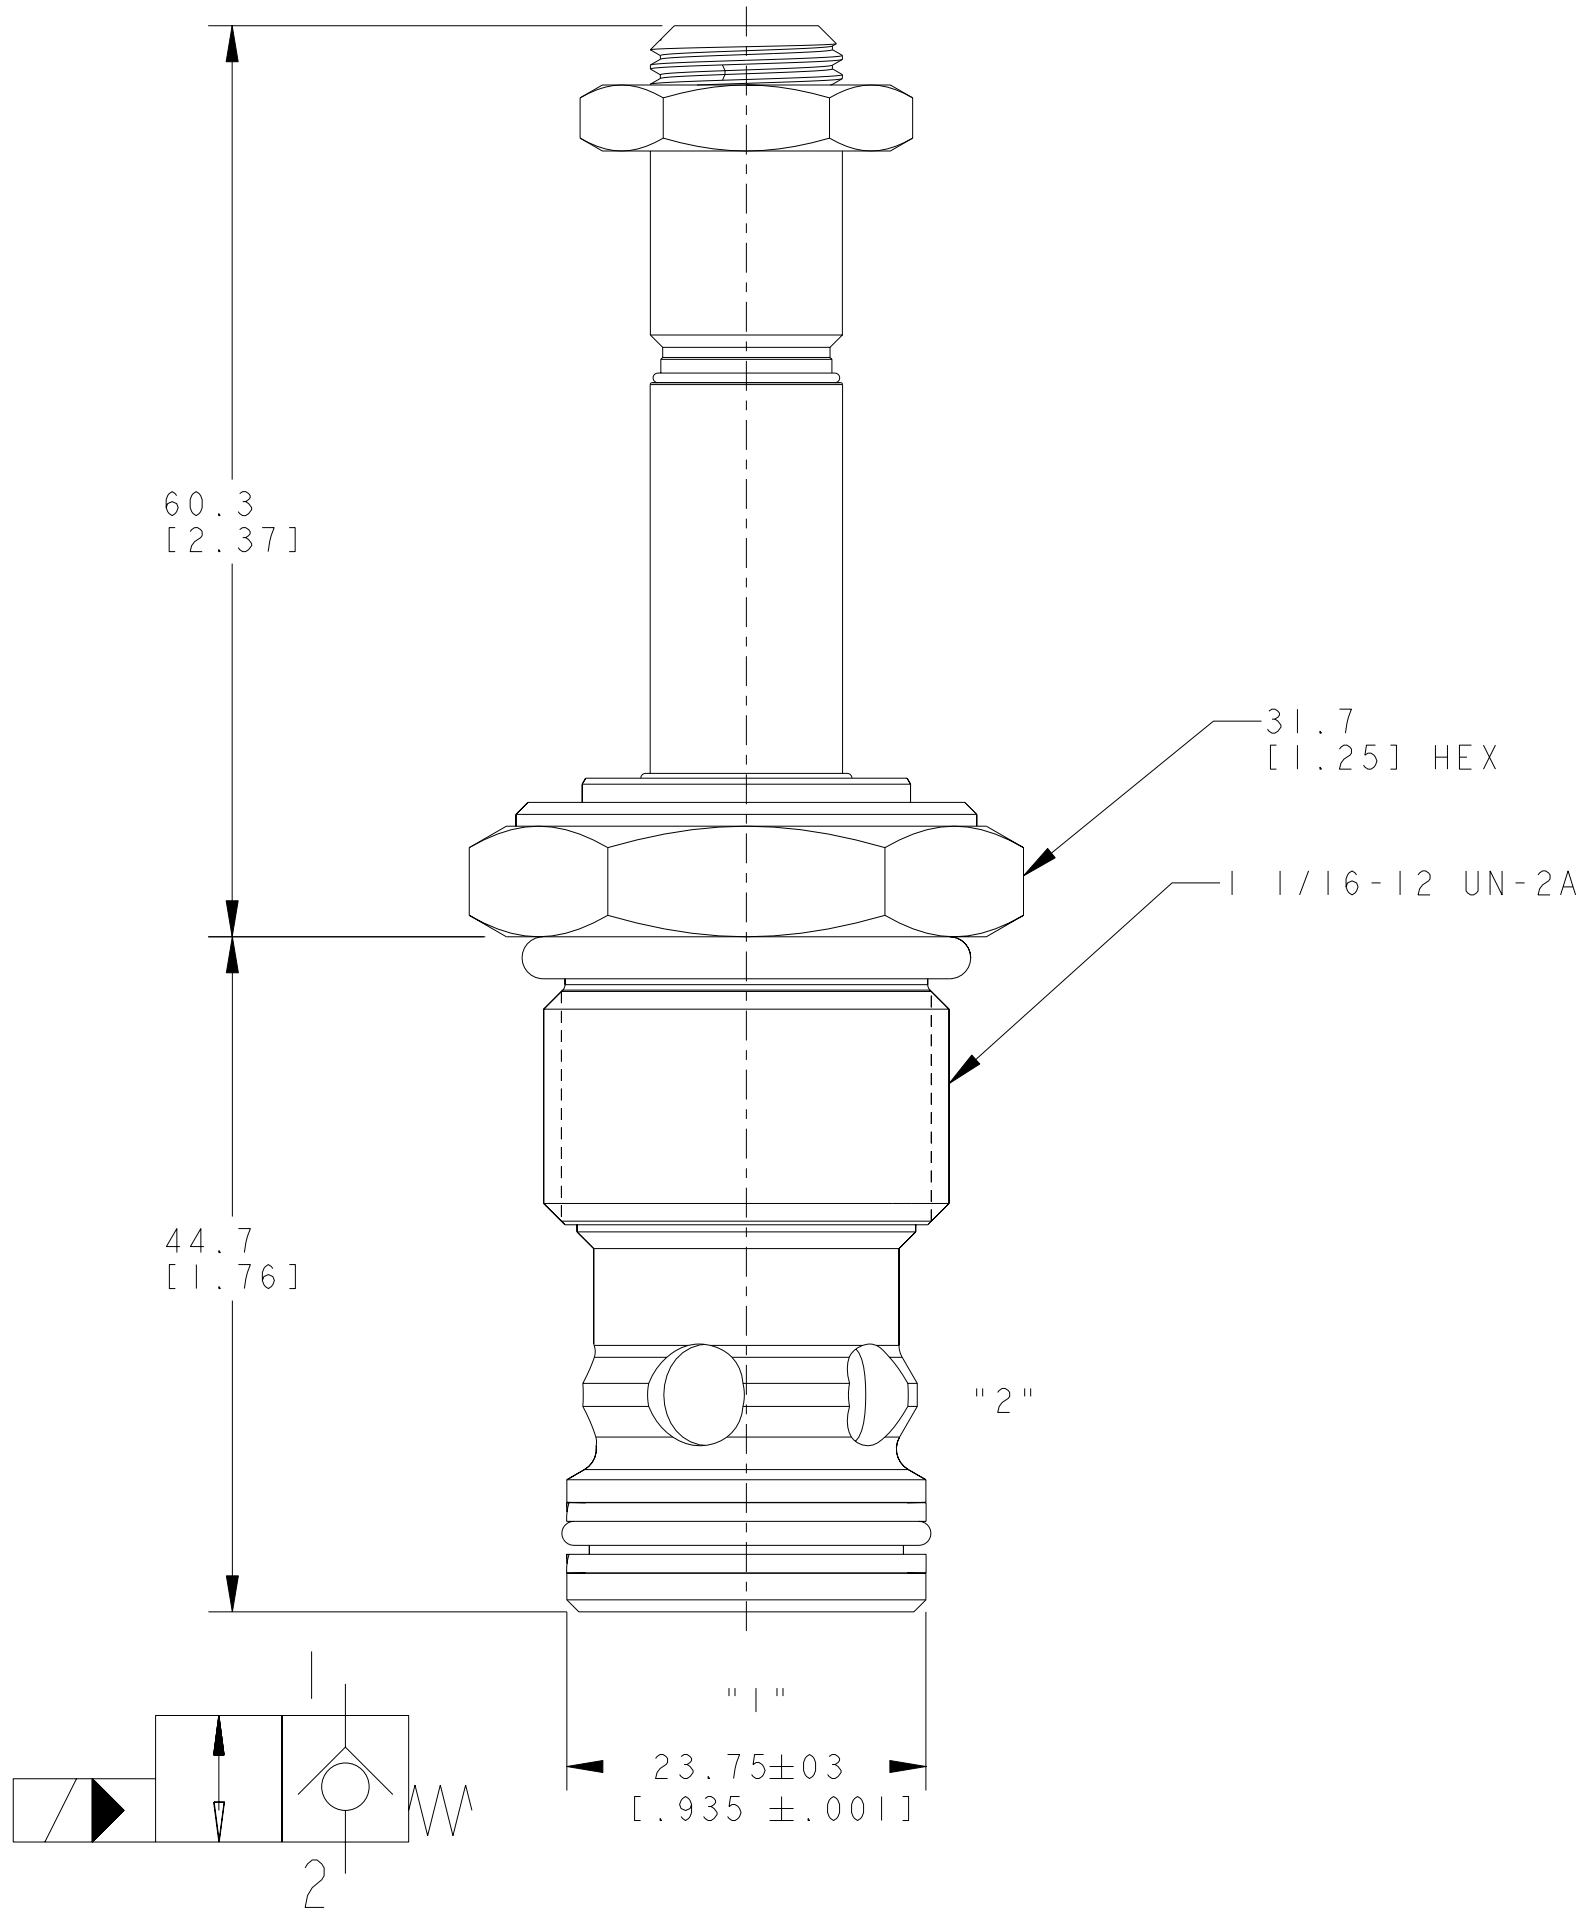


REV	DESCRIPTION	BY	CHK	DATE	ECN / MPS
A	ENGINEERING RELEASE	JGS	AH	2/12/05	M63978

NOTE:

- 1
- USE VALVE CAVITY C-12-2 OR C-12-2U
- 2
- NET WEIGHT:
CARTRIDGE ONLY: .154 kg[.34 lb]
CARTRIDGE W/COIL: .336 kg[.74 lb]
CARTRIDGE W/COIL AND ALUMINUM BODY: 1.33 kg[2.93 lb]
- 3
- TORQUE INTO CAVITY:
ALUMINUM CAVITY: 81-95 N.m [60-70 lbf.ft]
STEEL CAVITY: 102-115 N.m [75-85 lbf.ft]

MC

DISTRIBUTION CODE(S)

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES ☐ MILLIMETERS (INCHES) ☒	DRAWING BASED ON ANSI Y14.5M-1982			
	THE REPRODUCTION, DISTRIBUTION, AND UTILIZATION OF THIS DOCUMENT, AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPLICIT AUTHORIZATION IS PROHIBITED. OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHTS RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL, OR DESIGN. (PER ISO 16016)			
TOLERANCES .X ± .XX ± .XXX ± ∠ ±	DRAWN JGS BY/DATE 6/20/03		MATERIAL/HEAT TREAT 、 、	
	CHECKED LMD BY/DATE 8/4/03			
	UNSPECIFIED RADI ARE: ----		TITLE SOLENOID VALVE INSTALLATION	
METALLURGY BY/DATE				
UNSPECIFIED DRAFT ANGLES ARE: -----° B SIZE	 THIRD ANGLE PROJECTION DO NOT SCALE	MICROINCHES ☐ MICROMETERS (MICROINCHES) ☒ ✓ ARITHMETICAL AVERAGE	NUMBER A - 2416 - 013	
		SCALE 2/1	SHEET 1 OF 1	