
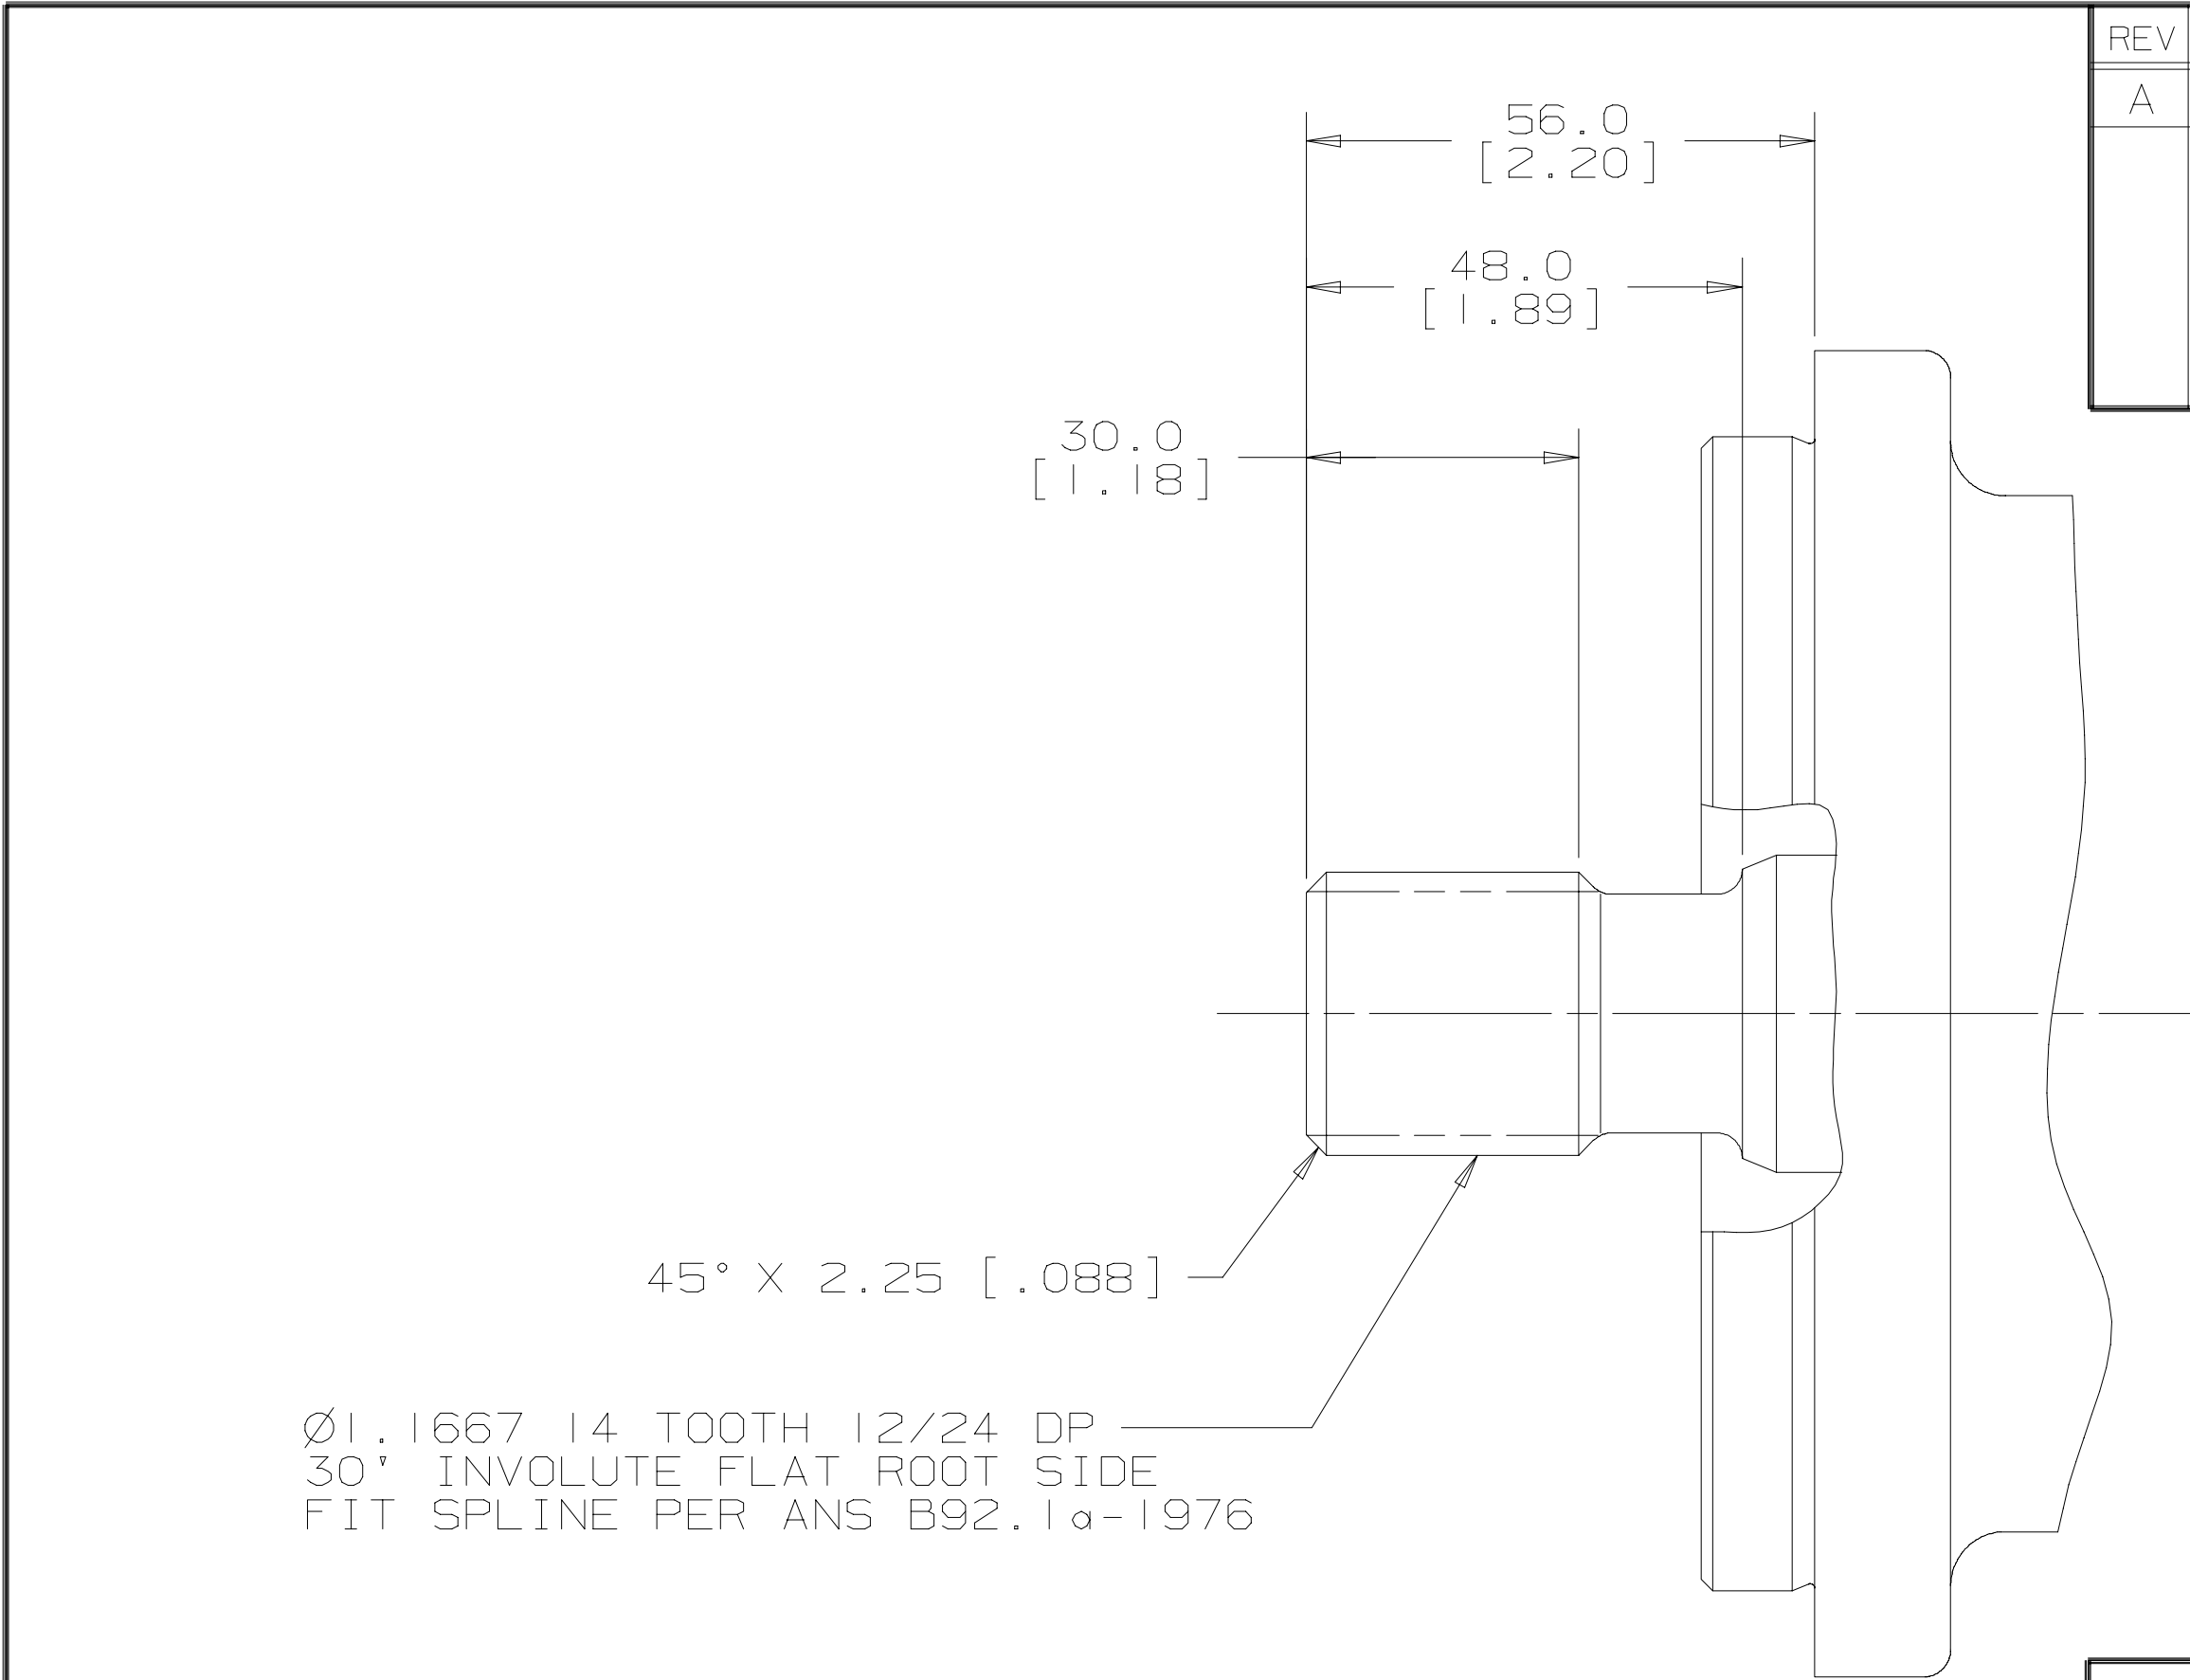




REV	DESCRIPTION	BY	CHK	DATE	ECN
A	ENGINEERING RELEASE	MJP	MJP	12-14-00	36421

NOTE
1 MAX INPUT TORQUE 640 N·m [5660 lbf·in]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES ☐ MILLIMETERS [INCHES] ☒		DRAWING BASED ON ANSI Y14.5M-1982			
TOLERANCES .X ± ----- .XX ± REF .XXX ± ONLY ∠ ± -----		THE REPRODUCTION, DISTRIBUTION, AND UTILIZATION OF THIS DOCUMENT, AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPLICIT AUTHORIZATION IS PROHIBITED. OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHTS RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL, OR DESIGN. (PER ISO 16016)			
		DRAWN BY/DATE MJP 12-20-01 MATERIAL/HEAT TREAT			
		CHECKED BY/DATE MJP 12-20-01			
UNSPECIFIED RADII ARE -----		ENGRG BY/DATE NJA 6-6-02		TITLE INPUT SHAFT INSTALLATION	
		METALLURGY ----- BY/DATE			
UNSPECIFIED DRAFT ANGLES ARE -----		 THIRD ANGLE PROJECTION		MICROINCHES ☐ MICROMETERS [MICROINCHES] ☐ ----- ✓ ARITHMETICAL AVERAGE	
DRAWING FORMAT CADD ☒ MANUAL ☐				NUMBER A-2269-002	
		DO NOT SCALE		SCALE 1/1 SHEET 1 OF 1	