
REV	DESCRIPTION	BY	CHK	DATE	ECN
A	ENGINEERING RELEASE	MJP	MJP	12-14-00	36421

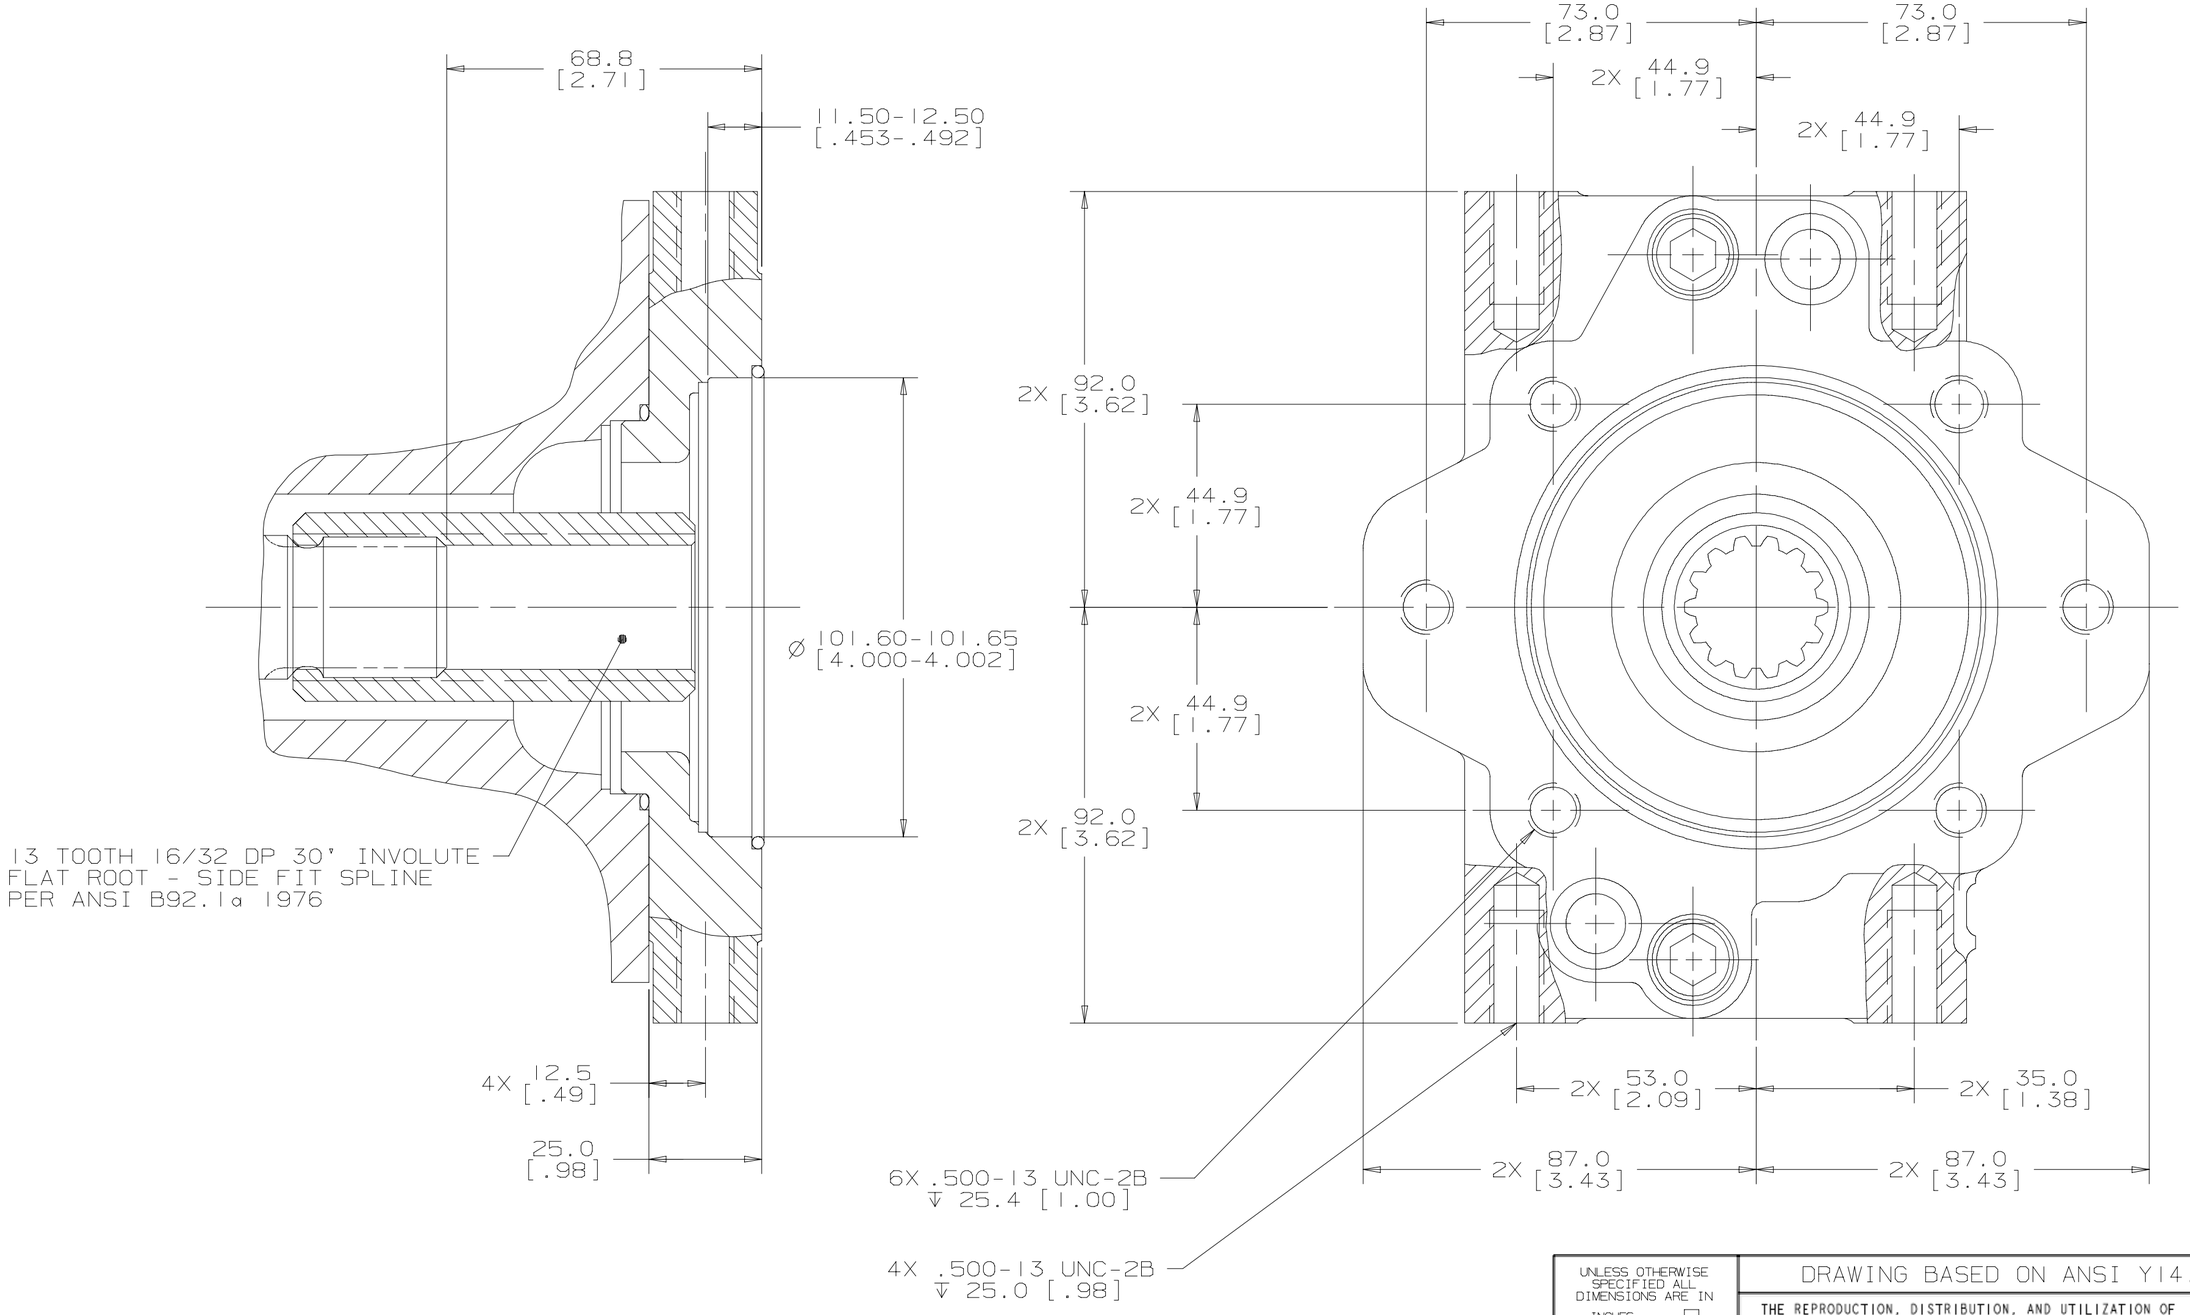

NOTE

1. TOTAL TORQUE OF ALL PUMPS MUST NOT EXCEED THE MAXIMUM INPUT SHAFT TORQUE LIMIT
2. THRU SHAFT TORQUE MAY BE LESS BASED ON THE MAXIMUM INPUT TORQUE TO THE FRONT PUMP
3. MAXIMUM OUTPUT TORQUE IS 208 N·m [1850 lbf·in]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN
INCHES ☐
MILLIMETERS [INCHES] ☒

TOLERANCES
.X ± -----
.XX ± REF
.XXX ± ONLY
∠ ± -----

UNSPECIFIED RADII ARE

UNSPECIFIED DRAFT ANGLES ARE

DRAWING FORMAT
CADD ☒ MANUAL ☐

DRAWING BASED ON ANSI Y14.5M-1982

THE REPRODUCTION, DISTRIBUTION, AND UTILIZATION OF THIS DOCUMENT, AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPLICIT AUTHORIZATION IS PROHIBITED. OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHTS RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL, OR DESIGN. (PER ISO 16016)

Danfoss

DRAWN BY/DATE MJP 4-3-02
CHECKED BY/DATE MJP 4-3-02
ENGRG BY/DATE RNA 7-29-02
METALLURGY BY/DATE -----

MATERIAL/HEAT TREAT

TITLE
AUXILIARY MOUNTING AND OUTPUT SHAFT INSTALLATION

THIRD ANGLE PROJECTION

DO NOT SCALE

MICROINCHES ☐
MICROMETERS [MICROINCHES] ☐
--- √
ARITHMETICAL AVERAGE

NUMBER
A-2268-021

SCALE 1/1

SHEET 1 OF 1