



DRIVEN BY POSSIBILITY™

GATES FUEL SYSTEM TECHNOLOGY:

FUEL MASTER™ UP TO E85 CURB PUMP HOSE

MODERN FUEL REQUIRES MODERN FUEL HOSE.

Installing Fuel Master™ Up to E85 Curb Pump hose protects against the aggressive fuel mixtures of today's modern fuels like ethanol and bio-diesel, which can degrade basic rubber hose and result in early hose failure.

Gates® Fuel Master™ Up to E85 Curb Pump hose offers best-in-class working pressure of 150psi and works well with ethanol mixtures without breaking a sweat. It's compliant with UL330A standards and designed to withstand the harshest environments and applications.

FEATURES + BENEFITS

Gates® Fuel Master™ Up to E85 Curb Pump hose:


- Tested for extreme ozone resistance
- Heavy-duty hardwall wire-braid reinforcement
- Designed for dispensing all fuel types; approved for use with leaded and unleaded gasoline, diesel, biodiesel and ethanol blends (E10, E15, E25 and E85)
- Utilizes Gates® MegaCrimp™ couplings; compatible with Gates® Crimpers
- Meets UL330A (USA) and ULC-S612-99 (Canada) standards



DRIVEN BY POSSIBILITY™

GATES® FUEL MASTER™ UP TO E85 CURB PUMP HOSE:

BEST-IN-CLASS CURB PUMP SOLUTIONS.

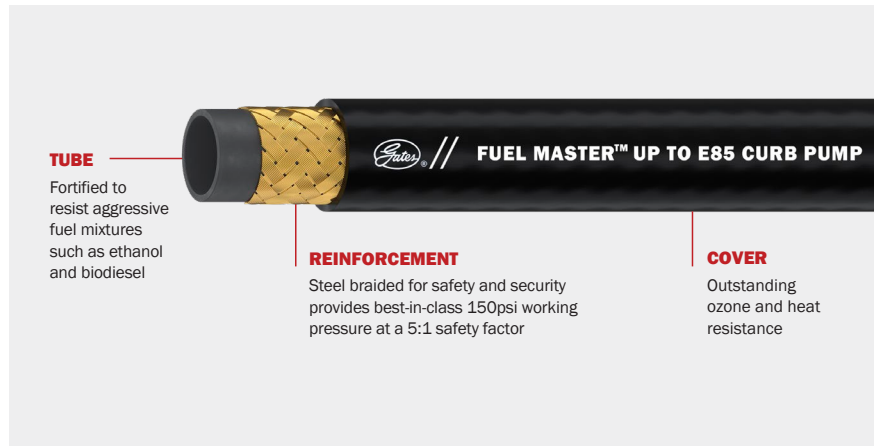

MODERN FUEL MEETS MODERN FUEL HOSE

INDUSTRIES + APPLICATIONS:

USE UP TO E85 CURB PUMP HOSE FOR:

- Flex-fuel Automobiles
- Flex-fuel Light Duty Truck + Bus
- Gas Stations

USE CURB PUMP + DIESEL CURB PUMP HOSE FOR:

- Truck + Bus
- Agriculture + Construction
- Forestry + Marine
- Gas Stations
- Stationary Diesel-Powered Equip.
- Recreational Equip.
- Lawn + Garden

THE RIGHT DISPENSING HOSE FOR EVERY APPLICATION.

FUEL MASTER™ CURB PUMP HOSE:

Dispensing of all types of commercial gasolines or other petroleum-based products from service station pumps (curb pump). A heavy-duty hardwall hose which does not collapse on reels or behind the dispensing nozzle.

- **Temp:** -40°F to +120°F (-40°C to +49°C) continuous service
- **Tube:** Nitrile, Black, ARPM (Class A), High oil-resistance
- **Reinforcement:** Braided, Steel Wire
- **Cover:** CPE, Black, Blue, 5/8", 3/4" and 7/8" Smooth, 1" Wrapped
- **Design Factor:** 5:1
- **Standards:** Underwriters Lab. Standard No. UL330 (USA) & ULC-S612 (Canada)



COLOR	SIZE I.D.	WORKING PSI	500' REEL PART #
Black	5/8"	150	3624-0001
Black	3/4"	150	3624-0002
Black	1"	150	3624-0003
Blue	3/4"	150	3624-1024
Blue	7/8"	150	3624-1025
Blue	1"	150	3624-1026

FUEL MASTER™ DIESEL CURB PUMP HOSE:

Dispensing of all types of petroleum diesel fuels and Bio-Diesel blends from service station pumps (curb pump). A heavy-duty hardwall hose which does not collapse on reels or behind the dispensing nozzle.

- **Temp:** -40°F to +120°F (-40°C to +49°C) continuous service
- **Tube:** Nitrile, Black, ARPM (Class A), High oil-resistance
- **Reinforcement:** Braided, Steel Wire
- **Cover:** CPE, Green, Smooth
- **Design Factor:** 5:1
- **Standards:** Underwriters Lab. Standard No. UL330 (USA) & ULC-S612 (Canada)



COLOR	SIZE I.D.	WORKING PSI	500' REEL PART #
Green	3/4"	150	3624-1007
Green	7/8"	150	3624-1008
Green	1"	150	3624-1009

FUEL MASTER™ UP TO E85 CURB PUMP HOSE:

Dispensing of all types of commercial gasolines or other petroleum-based products, including ethanol blends up to E85, from service station pumps (curb pump). A heavy-duty hardwall hose which does not collapse on reels or behind the dispensing nozzle.

- **Temp:** -40°F to +120°F (-40°C to +49°C) continuous service
- **Tube:** Modified Nitrile, Black, ARPM (Class A), High oil-resistance
- **Reinforcement:** Braided, Steel Wire
- **Cover:** CPE, Black, Smooth
- **Design Factor:** 5:1
- **Standards:** Underwriters Lab. Standard No. UL330A (USA) & ULC-S612-99 (Canada)



COLOR	SIZE I.D.	WORKING PSI	500' REEL PART #
Black	3/4"	150	3624-1023

GATES.COM

GLOBAL | 02AUG2022