




Hannay Reels®
The reel leader.

Air/Water/Lube/Hydraulic Reel Packages

N700 & N800 Series Reels

LOW PRESSURE

Part No.	Description	Size in.	Length ft.	PSI	Ship Wt. lbs.
47-11	N716-17-18-8L* SHOP AIR ONLY • Single textile braid reinforced synthetic rubber hose and HS-35 hose stop installed.	3/8	50	300	90
47-29	N716-19-20-10.5J* • Single textile braid reinforced synthetic rubber hose and HS-35 hose stop installed.	3/8	50	300	100
47-43	N716-25-26-15.5B* • Single textile braid reinforced synthetic rubber hose and HS-35 hose stop installed.	3/8	75	300	140
47-47	N718-25-26-15.5G* • Single textile braid reinforced synthetic rubber hose and HS-35 hose stop installed.	3/8	100	300	150
47-13	N716-17-18-8L* SHOP AIR ONLY • Single textile braid reinforced synthetic rubber hose and HS-35 hose stop installed.	1/2	50	280	90
47-24	N716-19-20J* • Single textile braid reinforced synthetic rubber hose and HS-35 hose stop installed.	1/2	50	280	100
47-44	N716-25-26-15.5B* • Single textile braid reinforced synthetic rubber hose and HS-35 hose stop installed.	1/2	75	280	140
47-48	N718-25-26-15.5G* • Single textile braid reinforced synthetic rubber hose and HS-35 hose stop installed.	1/2	100	280	160
48-50	N818-23-24-10.5J* • Single textile braid reinforced synthetic rubber hose and HS-35 hose stop installed.	3/4	50	300	145
48-55	N818-25-26-10.5B* • Single textile braid reinforced synthetic rubber hose and HS-35 hose stop installed.	1	50	300	160

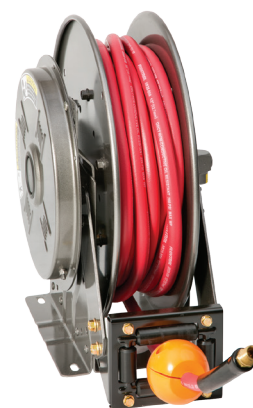

Standard "SR" roller position shown is standard.

N700 Series Reels

MEDIUM PRESSURE - N700 SERIES

Part No.	Description	Size in.	Length ft.	PSI	Ship Wt. lbs.
47-25	N716-19-20J* • SAE 100 R1 Type AT hose and HS-35 hose stop installed.	3/8	50	2950	99
47-26	N716-19-20J* • SAE 100 R1 Type AT hose and HS-35 hose stop installed.	1/2	50	2750	102



Standard "SR" roller position shown is standard.

N700 Series Reels

HIGH PRESSURE - N700 SERIES

Part No.	Description	Size in.	Length ft.	PSI	Ship Wt. lbs.
47-27	N716-19-20J H4M* • SAE 100 R16 Type AT hose and HS-35 hose stop installed.	3/8	50	5100	102
47-28	N716-19-20J H4M* • SAE 100 R16 Type AT hose and HS-35 hose stop installed.	1/2	50	4250	105

Note: *Must specify roller position SR, VR, TR. See back page for roller position information.

Family owned and operated since 1933


You Can't Buy A Better Reel.

Welding Reel Packages

N400 Series Reels

OXYGEN/ACETYLENE REELS

Part No.	Description	Size in.	Length ft.	PSI	Ship Wt. lbs.
55-10	N416-19-20-8J* • Twin Grade R hose and HS-35 hose stop installed.	1/4	50	200	103
55-11	N416-19-20-8J * • Twin Grade T hose and HS-35 hose stop installed.	1/4	50	200	103
55-12	N416-19-20-8J* • Twin Grade R hose and HS-35 hose stop installed.	3/8	50	200	109
55-13	N416-19-20-8J* • Twin Grade T hose and HS-35 hose stop installed.	3/8	50	200	109



Optional "TR" roller position shown.
"SR" roller position is standard.
Torch not included

Grease Reel Packages

N500 Series Hose Reels

GREASE REELS

Part No.	Description	Size in.	Length ft.	PSI	Ship Wt. lbs.
45-11	N515-19-20J H10M* • SAE 100 R2 Type AT hose and HS-35 hose stop installed.	1/4	50	5800	98
45-13	N515-19-20J H8M* • SAE 100 R16 Type AT hose and HS-35 hose stop installed.	3/8	50	5100	99



Optional "TR" roller position shown.
"SR" roller position is standard.

Live Cable Reel Packages

NSCR Series Cable Reels

LIVE CABLE REELS

Part No.	Description	Size in.	Length ft.	Ship Wt. lbs.
14-81	NSCR715-19-20J * • 3-conductor, 45 amp, 600V S00W 12/3 black cable, 15A straight blade receptacle and HS-35 hose stop installed.	.60	50	125
14-82	NSCR716-23-24-15.5G* • 3-conductor, 45 amp, 600V S00W 12/3 black cable, 15A straight blade receptacle and HS-35 hose stop installed.	.60	100	140



Standard "SR" roller position shown is standard.

Note: *Must specify roller position SR, VR, TR. See back page for roller position information.



Hannay Reels®
The reel leader.

You Can't Buy A Better Reel.

DEF Packages

Diesel Exhaust Fluid Series

1/2" X 50' DEF REELS


Part No.	Description	Size in.	Length ft.	Ship Wt. lbs.
47-63	DEF-450H* • 304 stainless steel fluid path, SST peroxide cured swivel joint with EPDM seals, 1/2" female NPT riser, "Tru Blue" DEF hose with 1/2" male NPT fittings and HS-35 hose stop installed.	1/2	50	110

3/4" X 50' DEF REELS

Part No.	Description	Size in.	Length ft.	Ship Wt. lbs.
47-53	DEF-650H* • 304 stainless steel fluid path, SST peroxide cured swivel joint with EPDM seals, 3/4" female NPT riser, "Tru Blue" DEF hose with 3/4" male NPT fittings and HS-35 hose stop installed.	3/4	50	127

1" X 50' DEF REELS

Part No.	Description	Size in.	Length ft.	Ship Wt. lbs.
48-42	DEF-850H* • 304 stainless steel fluid path, SST peroxide cured swivel joint with EPDM seals, 1" female NPT riser, "Tru Blue" DEF hose with 1" male NPT fittings and HS-35 hose stop installed.	1	50	160

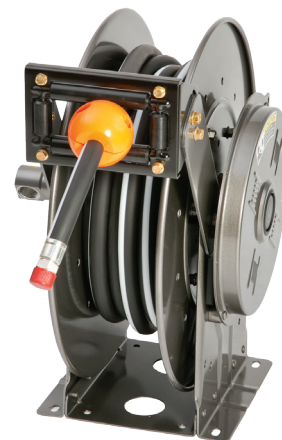

Optional "TR" roller position shown.
"SR" roller position is standard.

Fuel Packages

N800 Series Reels - Gas/Diesel

3/4" X 50' REELS

Part No.	Description	Size in.	Length ft.	Ship Wt. lbs.
48-51	N818-23-24-10.5J* • 1" 90° Super Swivel with Viton, 1" female NPT riser, Goodyear BC fuel hose (200 psi) and HS-35 hose stop installed.	3/4	50	140

1" X 50' REELS

Part No.	Description	Size in.	Length ft.	Ship Wt. lbs.
48-56	N818-25-26-10.5B* • 1" 90° Super Swivel with Viton, 1" female NPT riser, Goodyear BC fuel hose (200 psi) and HS-35 hose stop installed.	1	50	164



Gas/Diesel fuel hose shown with optional "TR" roller position shown.
"SR" roller position is standard.

Note: *Must specify roller position SR, VR, TR. See back page for roller position information.


Phone: **518-797-3791**
Toll Free: **1-877-467-3357**

Domestic FAX: **1-800-733-5464**
International FAX: **518-797-3259**

Roller Positions

BE SURE TO SPECIFY ROLLER POSITION WHEN ORDERING

On standard spring rewind reels, the hose/cable pays out from the bottom of the reel and to the left when reel is viewed from the swivel joint or collector ring side. **Hose/cable rollers are supplied with all spring rewind models and you must specify the roller position when you order.** (If roller position is not specified, reels will be shipped with rollers in POSITION SR.)




Specify roller position SR when reel will be:

- Installed in the upright position at any point from floor to eye level.
- Installed on a wall with hose/cable to be retracted close to the wall.
- Installed on ceiling, hose/cable will pay out parallel to and close to the ceiling.

Position SR (Standard) Shown:

Swivel Joint Right

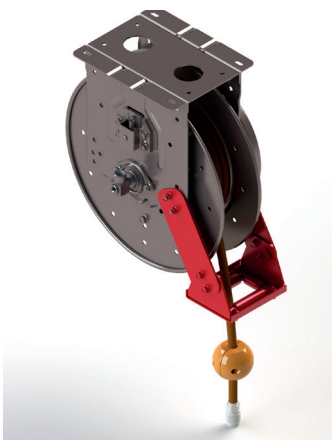


Specify roller position VR when reel will be:

- Installed in the upright position, hose/cable will be pulled upright from the reel.
- Installed on ceiling to lift hose/cable.
- Installed on a wall with hose/cable to be pulled straight out

Position VR Shown:

Swivel Joint Right



Specify roller position TR when reel will be:

- Installed on floor.
- Installed on ceiling with hose/cable to pay out parallel to the ceiling.
- Installed on a wall with hose/cable to be pulled straight down.

Position TR Shown:

Swivel Joint Left

