

Directional Controls



Directional Control Valve, Lever Operated CETOP 3

AX446860087019en-000101

DG17 V-3-**(L)-60

Spool Type	Model		
	A	C	N
0	893032	893025	893025
2	893033	893026	893026
6	893034	893027	893027
7		893028	893028
8		893029	
22	893035		
33		893030	893030

NOTE

Assemble "A" type spools in body with longer end land opposite operator.

NOTE


Lever operator on A port side of body for right hand builds and B port side of body for left hand builds.

NOTE

Left hand assembly shown for all models. For right hand assembly: On "A" models all parts are reversed except body. On "C" or "N" models all parts are reversed except body and spool.

NOTE

Grease handle, socket & hole in stop prior to assembly.

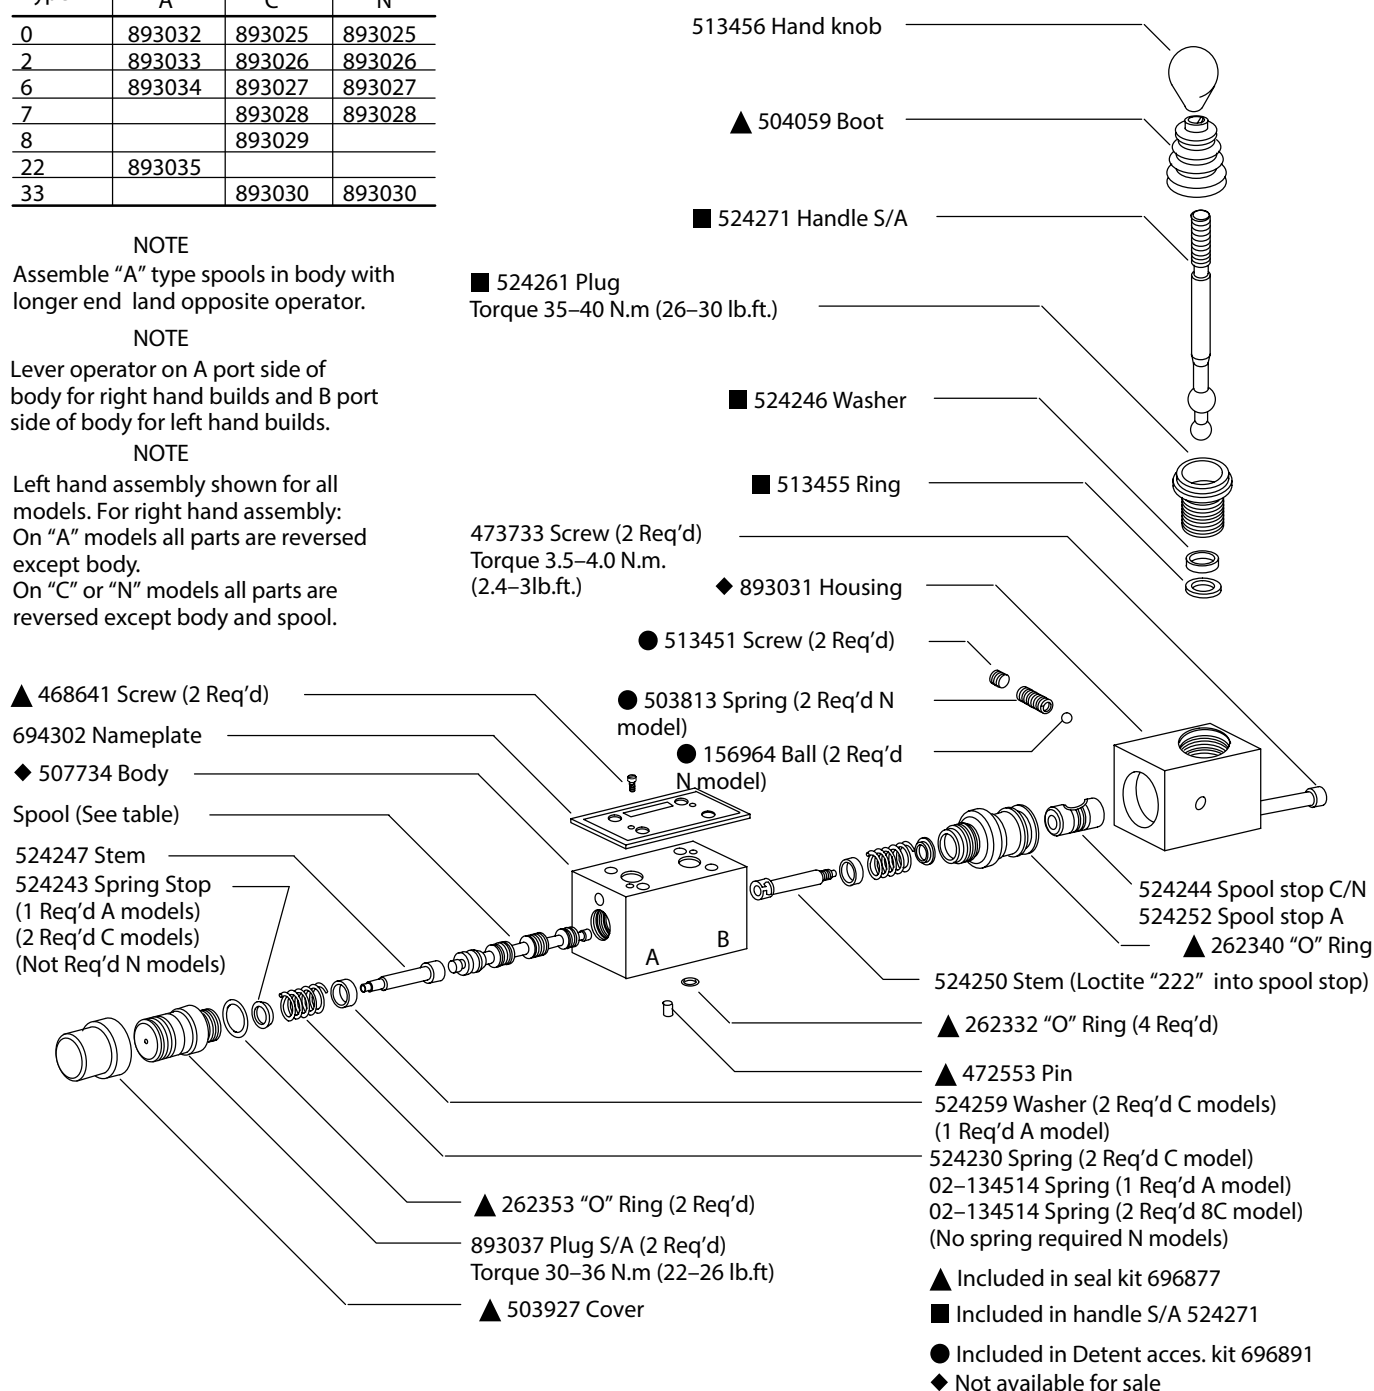

Model Code

DG	17	V	-	3	-	*	*	(L)	-	60
1	2	3	4	5	6	7	8			

1 D – Directional control valve
G – Subplate mounting

2 Lever operated

3 Rated pressure

V – 350 bar (5075 psi)

4 Interface

3 – ISO 4401 –03 (CETOP 3 & NFPA D03)

5 Spool type (see table)

6 Spool/Spring arrangement

A – Spring offset, to cylinder “A”

C – Spring centered


N – No spring detented

7 Build type

L – Left hand build (lever on “B” port side of valve)

Omit – Right hand build (lever on “A” port side of valve)

8 Design

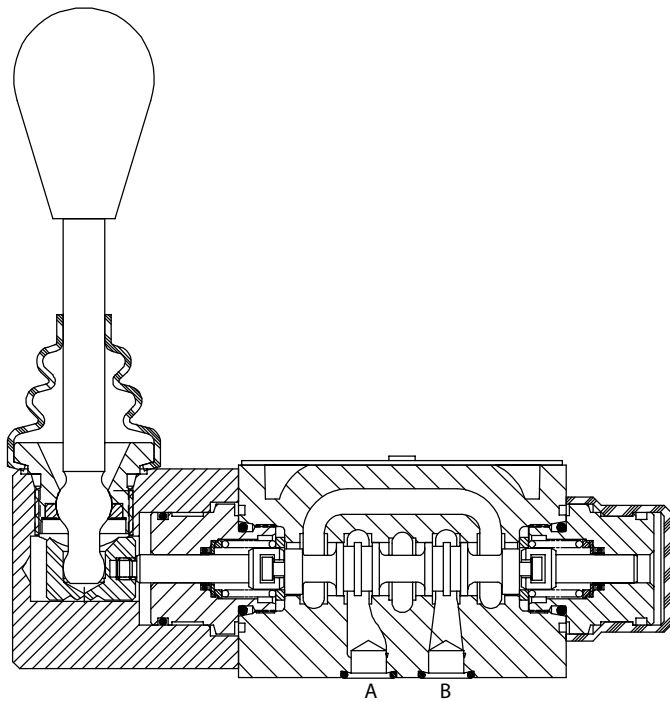

Typical sectional view

Products we offer:

- Cartridge valves
- DCV directional control valves
- Electric converters
- Electric machines
- Electric motors
- Gear motors
- Gear pumps
- Hydraulic integrated circuits (HICs)
- Hydrostatic motors
- Hydrostatic pumps
- Orbital motors
- PLUS+1® controllers
- PLUS+1® displays
- PLUS+1® joysticks and pedals
- PLUS+1® operator interfaces
- PLUS+1® sensors
- PLUS+1® software
- PLUS+1® software services, support and training
- Position controls and sensors
- PVG proportional valves
- Steering components and systems
- Telematics

Hydro-Gear

www.hydro-gear.com

Daikin-Sauer-Danfoss

www.daikin-sauer-danfoss.com

Danfoss Power Solutions is a global manufacturer and supplier of high-quality hydraulic and electric components. We specialize in providing state-of-the-art technology and solutions that excel in the harsh operating conditions of the mobile off-highway market as well as the marine sector. Building on our extensive applications expertise, we work closely with you to ensure exceptional performance for a broad range of applications. We help you and other customers around the world speed up system development, reduce costs and bring vehicles and vessels to market faster.

Danfoss Power Solutions – your strongest partner in mobile hydraulics and mobile electrification.

Go to www.danfoss.com for further product information.

We offer you expert worldwide support for ensuring the best possible solutions for outstanding performance. And with an extensive network of Global Service Partners, we also provide you with comprehensive global service for all of our components.

Local address:

**Danfoss
Power Solutions (US) Company**
2800 East 13th Street
Ames, IA 50010, USA
Phone: +1 515 239 6000

**Danfoss
Power Solutions GmbH & Co. OHG**
Krokamp 35
D-24539 Neumünster, Germany
Phone: +49 4321 871 0

**Danfoss
Power Solutions ApS**
Nordborgvej 81
DK-6430 Nordborg, Denmark
Phone: +45 7488 2222

**Danfoss
Power Solutions Trading
(Shanghai) Co., Ltd.**
Building #22, No. 1000 Jin Hai Rd
Jin Qiao, Pudong New District
Shanghai, China 201206
Phone: +86 21 2080 6201

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.